



MV-325



CMV-325E

GLASS DOOR COOLERS

MV-325 / CMV-325E

Key Features

- Forced Air Refrigeration
- Illuminated Header on CMV-325E
- Bright Interior Lighting
- Adjustable Thermostat
- Self Closing Glass Door
- Brushed Aluminum Door Frame
- Adjustable Coated Wire Shelves

Model	Doors	Capacity cu.ft (lt)	Shelves	Exterior Dimensions inches (mm)			Interior Dimensions inches (mm)			Power (V-Hz-Ph)	Amps	HP	Crated Weight lbs (kg)
				L	D	H	L	D	H				
MV-325	1	11 3/8 (322)	4	23 1/4 (590)	24 3/8 (620)	68 7/8 (1750)	19 1/4 (490)	18 1/2 (471)	58 3/8 (1482)	115.60.1	3	1/3	184 (84)
CMV-325E	1	11 3/8 (322)	4	23 1/4 (590)	24 3/8 (620)	75 5/8 (1920)	19 1/4 (490)	18 1/2 (471)	58 3/8 (1482)	115.60.1	3	1/3	193 (88)

## Details

### Cabinet Construction

- Exterior: Galvanized, pre-painted steel cabinet, white.
- Interior: Durable ABS Plastic lining allows for easy cleaning.
- High-density, CFC-Free, polyurethane insulation.
- Illuminated header panel for attractive branding on CMV-325E
- Four (4) low profile adjustable feet.

### Door

- Self-closing reversible door with aluminum frame and recessed side handle.
- Low-E, tempered, thermal glass door for increased efficiency and maximum product visibility.
- Strong magnetic gasket ensures a tight seal.

### Shelving

- Four (4) heavy-duty coated adjustable wire shelves: 20" x 16" (508 x 406)
- Shelves slide into plastic liner and are easily adjustable in one (1) inch increments

### Lighting

- Bright fluorescent lighting provides for maximum illumination of products.
- Utilizes T8 bulbs and an electronic ballast for increased energy efficiency and extended life.

### Electrical

- Ready for connection to 115V/60Hz single phase 20 amp dedicated outlet. Includes an 8' cord and plug set.



**NEMA 5-15R**

### Refrigeration System


- Forced air, environmentally friendly refrigeration system using CFC-free R134A refrigerant.
- Self-contained heated drain pan and condensate evaporation system.
- Automatic self defrost cycle.
- Electronic temperature control maintains 34°F to 41°F (1°C to 5°C).

- Bottom mounted refrigeration unit allows for easy maintenance and service.


### Options

- 208-230V/ 50Hz
- Custom Graphics
- Additional Shelves
- 3" Heavy Duty Casters
- Various Cabinet Colors

## Technical Drawing

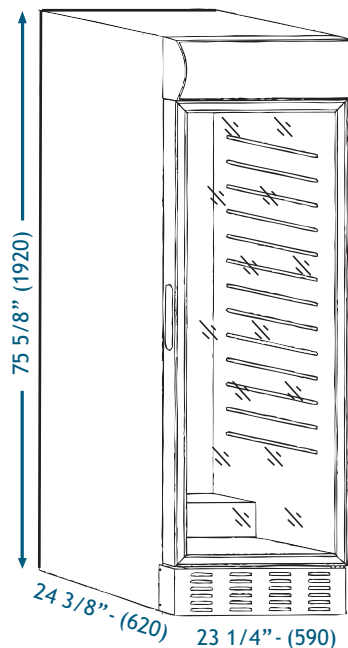

CMV-325E

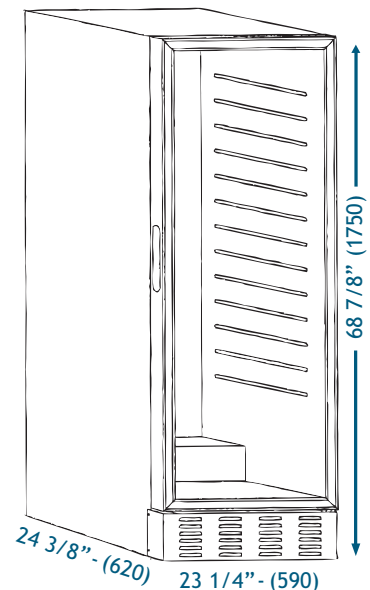

MV-325

**MV-325 / CMV-325E**



3235 Industry Drive • Suite C  
North Charleston, SC 29418  
Phone: 843-767-6855  
Toll Free: 800-905-4768

Fax: 843-767-6858  
Toll Free Fax: 800-906-4768  
[www.atcgroup.net](http://www.atcgroup.net)  
[sales@atcgroup.net](mailto:sales@atcgroup.net)

### WARRANTY

One year warranty on all parts and labor and an additional 4 year prorated warranty on compressor.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>