


INSTRUCTION MANUAL MANUAL DE INSTRUCCIONES

Model Number / No. de Modelo: WCR9000S

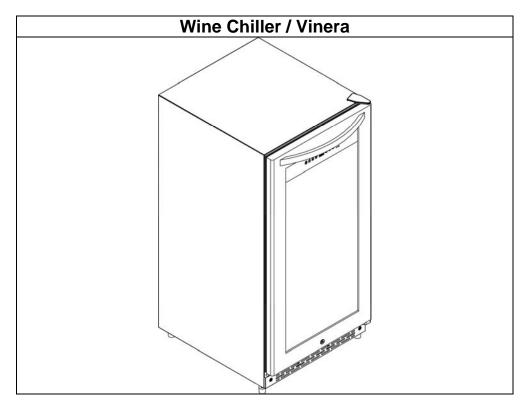

BEFORE USE, PLEASE READ AND FOLLOW ALL SAFETY RULES AND OPERATING INSTRUCTIONS.

La sección en español empieza en la página 15.

Avanti Products has a policy of continuous improvement on its products and reserves the right to change materials and specifications without notice.

Avanti Products, A Division of The Mackle Co., Inc. P.O. Box 520604 - Miami, Florida 33152 www.avantiproducts.com

TABLE OF CONTENTS

Important Safety Instructions	3
Appliance Safety	3
Important Safeguides	4
Help Us Help You	5
Parts and Features	6
Electrical Connection	7
Extension Cord / Surge Protector	7
Installation Instructions	8
Before Using Your Appliance	8
Installation of Your Appliance	8
Built-in Cabinet Instructions	8
Operating Your Appliance ON/OFF Power Setting the Temperature Control Special Features Economy / Vacation Mode Power Outage / Loss Indicator Door Ajar Indicator Filter Change Indicator Storage Interior Light Control Panel Lock Door Lock Shelves	 9 - 11
Care and Maintenance	11
Cleaning Your Wine Chiller	11
Power Failure	11
Moving Your Wine Chiller	11
Energy Saving Tips	11
Troubleshooting Guide	12
Service for Your Appliance	13
Wiring Diagram	13
Your Avanti Products Warranty	14
Instrucciones en Español	15 ~18
Registration Information and Registration Card	Last Page

IMPORTANT SAFETY INSTRUCTIONS

£WARNING£

To reduce the risk of fire, electrical shock, or injury when using your appliance, follow these basic precautions:

- Read all instructions before using the Wine Chiller.
- **DANGER or WARNING:** Risk of child entrapment. Child entrapment and suffocation are not problems of the past. Junked or abandoned appliances are still dangerous . . . even if they will "just sit in the garage a few days".
- **Before you throw away your old Wine Chiller:** Remove the door. Leave the shelves in place so that children may not easily climb inside.
- Never allow children to operate, play with, or crawl inside the appliance.
- Never clean appliance parts with flammable fluids. The fumes can create a fire hazard or explosion.
- Do not store or use gasoline or any other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard or explosion.
 Save these instructions-

APPLIANCE SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the Safety Alert Symbol. This symbol alerts you to potential hazards that can kill or injure you and others. All safety messages will follow the Safety Alert Symbol and either the words "DANGER", "WARNING" or "CAUTION".



\Lambda WARNING 🗛

CAUTION

Danger means that failure to heed this safety statement may result in severe personal injury or death.

Warning means that failure to heed this safety statement may result in extensive product damage, serious personal injury, or death.

Caution means that failure to heed this safety statement may result in minor or moderate personal injury, or property or equipment damage.

All safety messages will alert you do what the potential hazard is, tell you how to reduce the chance of injury, and let you know what can happen if the instructions are not followed.

IMPORTANT SAFEGUIDES



Before the appliance is used, it must be properly positioned and installed as described in this manual, so read the manual carefully. To reduce the risk of fire, electrical shock or injury when using the appliance, follow basic precaution, including the following:



- Plug into a grounded 3-prong outlet, do not remove grounding prong, do not use an adapter, and do not use an extension cord.
- Replace all panels before operating.
- It is recommended that a separate circuit, serving only your appliance be provided. Use receptacles that cannot be turned off by a switch or pull chain.
- Never clean appliance parts with flammable fluids. These fumes can create a fire hazard or explosion. And do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance. The fumes can create a fire hazard or explosion.
- Before proceeding with cleaning and maintenance operations, make sure the power line of the unit is disconnected.
- Do not connect or disconnect the electric plug when your hands are wet.
- Unplug the appliance or disconnect power before cleaning or servicing. Failure to do so can result in electrical shock or death.
- Do not attempt to repair or replace any part of your appliance unless it is specifically recommended in this material. All other servicing should be referred to a qualified technician.



FOLLOW WARNING CALL OUTS BELOW ONLY WHEN APPLICABLE TO YOUR MODEL

- Use two or more people to move and install appliance. Failure to do so can result in back or other injury.
- To ensure proper ventilation for your appliance, the front of the unit must be completely unobstructed. Choose a well-ventilated area with temperatures above 60°F (16°C) and below 90°F (32°C). This unit must be installed in an area protected from the element, such as wind, rain, water spray or drips.
- The appliance should not be located next to ovens, grills or other sources of high heat.
- The appliance must be installed with all electrical, water and drain connections in accordance with state and local codes. A standard electrical supply (115 V AC only, 60 Hz), properly grounded in accordance with the National Electrical Code and local codes and ordinances is required.
- Do not kink or pinch the power supply cord of appliance.
- The fuse (or circuit breaker) size should be 15 amperes.
- It is important for the appliance to be leveled in order to work properly. You may need to make several adjustments to level it.
- Never allow children to operate, play with or crawl inside the appliance.
- Do not use solvent-based cleaning agents of abrasives on the interior. These cleaners may damage or discolor the interior.
- Do not use this apparatus for other than its intended purpose.

HELP US HELP YOU ...

Read this guide carefully.

It is intended to help you operate and maintain your new Wine Chiller properly.

Keep it handy to answer your questions. If you don't understand something or you need more assistance, please call:

Avanti Customer Service 800-220-5570

Keep proof of original purchase date (such as your sales slip) with this guide to establish the warranty period.

CAUTION:

THIS WINE CHILLER IS NOT DESIGNED FOR THE STORAGE OF MEDICINE OR OTHER MEDICAL PRODUCTS.

Write down the model and serial numbers.

You'll find them on a plate located on the rear outside wall of the Wine Chiller.

Please write these numbers here:

Date of Purchase

Model Number

Serial Number

Use these numbers in any correspondence or service calls concerning your Wine Chiller.

If you received a damaged Wine Chiller, immediately contact the dealer (or builder) that sold you the Wine Chiller.

Save time and money. Before you call for service, check the Troubleshooting Guide. It lists causes of minor operating problems that you can correct yourself.

IF YOU NEED SERVICE


We're proud of our service and want you to be pleased. If for some reason you are not happy with the service you receive, here are some steps to follow for further assistance.

FIRST, contact the people who serviced your Wine Chiller. Explain why you are not pleased. In most cases, this will solve the problem.

NEXT, if you are still not pleased, write all the details, including your telephone number, and send it to:

Customer Service Avanti Products 10880 NW 30 Street Miami, FL 33172 USA

PARTS & FEATURES

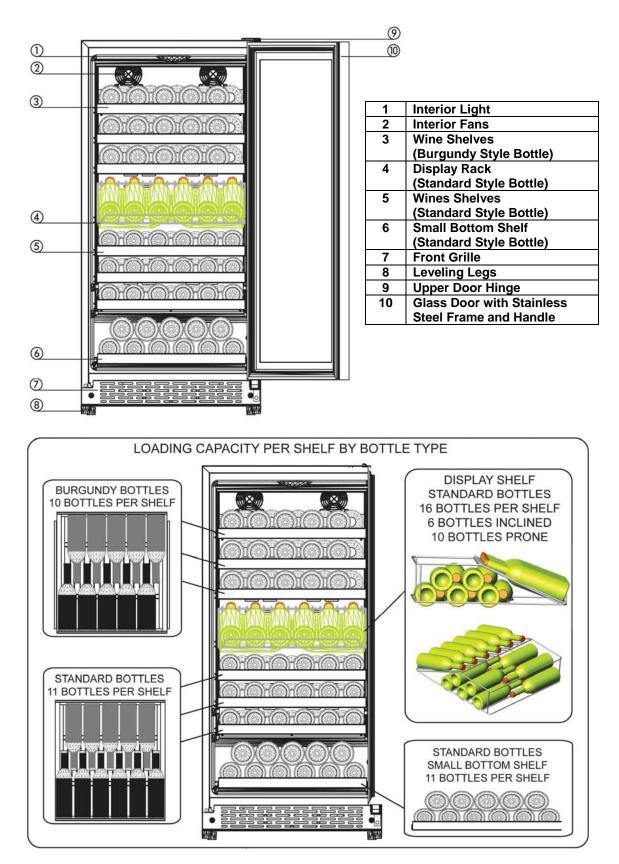

ELECTRICAL CONNECTION

£Warning£

Improper use of the grounded plug can result in the risk of electrical shock. If the power cord is damaged, have it replaced by an authorized Avanti Products service center.

This appliance should be properly grounded for your safety. The power cord of this appliance is equipped with a three-prong plug which mates with standard three prong wall outlets to minimize the possibility of electrical shock.

Do not under any circumstances cut or remove the third ground prong from the power cord supplied. For personal safety, this appliance must be properly grounded.

This appliance requires a standard 115/120 Volt AC ~/60Hz electrical ground outlet with three-prong. Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded. When a standard 2-prong wall outlet is encountered, it is your responsibility and obligation to have it replaced with a properly grounded 3-prong wall outlet.

The cord should be secured behind the appliance and not left exposed or dangling to prevent accidental injury.

The appliance should always be plugged into its own individual electrical outlet which has a voltage rating that matches the rating label on the appliance. This provides the best performance and also prevent overloading house wiring circuits that could cause a fire hazard from overheated. Never unplug the appliance by pulling the power cord. Always grip the plug firmly and pull straight out from the receptacle. Repair or replace immediately all power cords that have become frayed or otherwise damaged. Do not use a cord that shows cracks or abrasion damage along its length or at either end. When moving the appliance, be careful not to damage the power cord.

Ö EXTENSION CORD

Because of potential safety hazards under certain conditions, it is strongly recommended that you do not use an extension cord with this appliance. However, if you must use an extension cord it is absolutely necessary that it be a UL/CUL-Listed, 3-wire grounding type appliance extension cord having a grounding type plug and outlet and that the electrical rating of the cord be 115 volts and at least 10 amperes.

Ö SURGE PROTECTOR

Most electrical appliances use a series of electric control boards to operate. These boards are very susceptible to power surges and could be damaged or destroyed.

If the appliance is going to be used in an area or if your city / country is prone to power surges / outages; it is suggested that you use a power surge protector for all electrical devices / appliances you use. The surge protector that you select must have a surge block high enough to protect the appliance it is connected to. If you have any questions regarding the type and size of surge protector needed contact a licensed electrician in your area.

Damages due to power surges are not considered a manufacturer covered defect and will void your product warranty.

INSTALLATION INSTRUCTIONS

Ö BEFORE USING YOUR WINE CHILLER

- Remove the exterior and interior packing.
- Check to be sure you have all of the following parts:

1	Instruction Manual
6	Large Shelves
1	Small Shelf
1	Display Rack Shelf
2	Keys

- Before connecting this appliance to the power source, let it stand upright for approximately 2 hours. This will reduce the possibility of a malfunction in the cooling system from handling during transportation.
- Clean the interior surface with lukewarm water using a soft cloth.

Ö INSTALLATION OF YOUR WINE CHILLER

- This appliance is designed to be for free standing installation or built-in (fully recessed).
- Place your Wine Chiller on a floor that is strong enough to support it when it is fully loaded. To level your Wine Chiller, adjust the front leveling legs at the bottom of the Wine Chiller.
- Locate the Wine Chiller away from direct sunlight and sources of heat (stove, heater, radiator, etc.). Direct sunlight may affect the acrylic coating and heat sources may increase electrical consumption. Extreme cold ambient temperatures may also cause the unit not to perform properly.
- Avoid locating the unit in moist areas.
- Plug the Wine Chiller into an exclusive, properly installed-grounded wall outlet. Do not under any circumstances cut or remove the third (ground) prong from the power cord. Any questions concerning power and/or grounding should be directed toward a certified electrician or an authorized Avanti Products service center.

Ö BUILT – IN CABINET INSTRUCTIONS

This unit is designed for both built-in or free standing installation. If you plan to use this unit in a builtin application please follow the requirements shown to the right.





Figure shown \rightarrow			
Unit Dimensions			
	IN (min)	MM (min)	
Width	23.5	597 mm	
Depth	28.75	729 mm	
(with handle)			
Depth	26.8	681 mm	
(without Handle)			
Height	48.5	1232 mm	

← Figure shown					
Cabinet Opening Dimensions					
IN (min) MM (min)					
Width	idth 24" 610 mm				
Depth	Depth 26" 661 mm				
Height 49 ³ / ₄ " 889 mm					



OPERATING YOUR WINE CHILLER

It is recommended you install the appliance in a place where the ambient temperature is between 72-78 degrees Fahrenheit. If the ambient temperature is above or below recommended temperatures, the performance of the unit may be affected. For example, placing your unit in extreme cold or hot conditions may cause interior temperatures to fluctuate. The range of 45-65 degrees Fahrenheit may not be reached. Your wine chiller is designed to operate with at a range of $45^{\circ} - 65^{\circ} F (7 - 19^{\circ}C)$.

Recommended Temperatures for Chilling Wine.				
Red Wines	58 - 65 °F	14 - 18 °C		
Dry / White Wines	48 - 57 °F	10 - 13 °C		
Rose Wines	49 - 51 °F	9 - 11 °C		
Sparkling Wines	40 - 47 °F	5 - 8 °C		

	Wine Chiller Control Panel			
				LIGHT "F/C RESET PWR LOSS
	*	+ , -		. / 0 1
Т	*	Power Button		Interior Light ON/OFF Button
	+	ECON – Energy Saver Program Button	/	°F/°C Selector Button
	,	Temperature Selector Buttons	0	Alarm Reset Button
	-	Electronic Display	1	Alarm Indicator Lights

You can select temperature display setting from Fahrenheit to Celsius degree by pushing the **°F/°C** button/mark. Fahrenheit or Celsius degrees indicator will appear in blue color in the temperature display window.

Basic Operation

Ö ON/OFF POWER

To turn ON or OFF the appliance, press the (\bigcirc) button/mark and hold for **3** seconds.

Ö SETTING THE TEMPERATURE CONTROL

You can press UP (\triangle) and DOWN (∇) buttons/marks to control the internal temperature .

The degrees indicators will appear in the display window.

The temperature that you desire to set will increase 1°F or 1°C if you push the UP (A) button/mark once, on the contrary the temperature will decrease 1°F or 1°C if you push the DOWN v button/mark once.

NOTE:

- If the unit is unplugged, power lost, or turned off, you must wait 3 to 5 minutes before restarting the unit. If you attempt to restart before this time delay, the Wine Chiller will not start.
- When you use the wine chiller for the first time or restart the wine chiller after having been shut off for a long time, there could be a few degrees variance between the temperature you select and the one indicated on the LED readout. This is normal and it is due to the length of the activation time. Once the wine chiller is running for a few hours everything will be back to normal.

SPECIAL FEATURES

ECON	Your unit is equipped with an ECONOMY (Vacation) MODE. This operating mode will cut energy consumption by turning off all indicator lights and LED display while in the ECON mode. To activate the ECON mode press and hold the ECON selector button until the green indicator light is illuminated. To deactivate the ECON mode and return to normal operation, simply press the ECON selector button again.
PWR LOSS	A special added feature is a POWER LOSS / OUTAGE indicator and alarm. In the event of a power outage or loss the PWR LOSS indicator will flash intermittently and a single alarm will sound. To reset the alarm simply press the RESET button shown below.
DOOR	If at anytime the door has been left open or ajar for more than 5 minutes, the DOOR indicator and alarm will be activated. The DOOR indicator light will flash intermittently and an alarm will sound every 60 seconds. To reset the alarm simply close the door properly or press the RESET button shown below.
FILTER	An added feature to your wine cellar is the FILTER replacement indicator. Once your unit has been in use for 12 months, the FILTER indicator light will flash intermittently to remind you to change the filter. After changing the filter press the RESET button shown below to restart the timing program to remind you again in another 12 months to change the filter.
(H)	The RESET button is used to set-up any of the warning indicators shown above (PWR LOSS, DOOR, FILTER). Once pressed the above indicators are reset and returned to their ready state.

Ö **STORAGE**

Many bottles may differ in size and dimensions. As such the actual number of bottles you may be able to store may vary.

NOTE:

Capacity:

Bottle capacities are approximate maximums when storing traditional Bordeaux 750 ML bottles and include bulk storage.

Ö INTERIOR LIGHT

• You can turn the interior light on or off by pushing the button marked (-,,)

Ö CONTROL PANEL LOCK

- Your Wine chiller is equipped with an automatic Control panel lock function. This function will prevent any unwanted changes to your temperature or power settings.
- The lock function will activate automatically 12 seconds after the last time a button is pushed on the control panel.
- To unlock the control panel lock press and hold the (**UP**) (a) and the (**DOWN**) (v) buttons simultaneously for 3 seconds the control panel will beep once indicating that the control panel is active and the settings can be changed.

Ö DOOR LOCK

Your unit is provided with a lock and key combination.

The keys are located inside the plastic bag that contains the User's Guide. Insert the key into the lock and turn it counterclockwise to lock the door. To lock the door do the reverse operation making sure metal pin is engaged completely. Remove the key and place it in a secure place for safekeeping.

Ö <u>SHELVES</u>

The appliance is equipped with the wired shelves. You can move the shelves out and in smoothly.

- To prevent damaging the door gasket, make sure to have the door all the way opened when pulling the bottom shelf out of the rail compartment.
- For easy access to the storage content, you can pull the shelf approximately 100% out of the rail compartment, however this unit was designed with a stopper on each side of the shelf track to prevent bottles from falling.
- When removing the shelf out of the inner rail, make sure to remove all items first. Then pull the shelf until it is stopped by the stopper, and then lift the shelf. In order to replace the shelf, repeat steps described above in reverse.



CARE AND MAINTENANCE

Ö CLEANING YOUR WINE CHILLER

- Turn off the power, unplug the appliance, and remove all items including shelves.
- Wash the inside surfaces with a warm water and baking soda solution. The solution should be about 2 tablespoons of baking soda to a quart of water.
- Wash the shelves with a mild detergent solution.
- Wring excess water out of the sponge or cloth when cleaning area of the controls, or any electrical parts.
- Wash the outside cabinet with warm water and mild liquid detergent. Rinse well and wipe dry with a clean soft cloth.
- Do not use steel wool or steel brush on the stainless steel. These will contaminate the stainless steel with steel particles and rusting may occur.

Ö POWER FAILURE

 Most power failures are corrected within a few hours and should not affect the temperature of your appliance if you minimize the number of times the door is opened. If the power is going to be off for a longer period of time, you need to take the proper steps to protect your contents.

Ö MOVING YOUR WINE CHILLER

- Remove all items.
- Securely tape down all loose items (shelves) inside your appliance.
- Tape the door shut.
- Be sure the appliance stays secure in the upright position during transportation. Also protect outside of appliance with a blanket, or similar item.

Ö ENERGY SAVING TIPS

• The Wine Chiller should be located in the coolest area of the room, away from heat producing appliances, and out of the direct sunlight.

PROBLEMS WITH YOUR WINE CHILLER?

You can solve many common Wine Chiller problems easily, saving you the cost of a possible service call. Try the suggestions below to see if you can solve the problem before calling the servicer.

PROBLEM	POSSIBLE CAUSE
Wine Chiller does not operate.	Not plugged in.
	The appliance is turned off.
	The circuit breaker tripped or a blown fuse.
Wine Chiller is not cold enough.	Check the temperature control setting.
6	The door is opened too often.
	The door is not closed completely.
	The door gasket does not seal properly.
Turns on and off frequently.	The room temperature is hotter than normal.
	A large amount of contents has been added to the wine chiller.
	The door is opened too often.
	The door is not closed completely.
	The temperature control is not set correctly.
	The door gasket does not seal properly.
The light does not work.	Not plugged in.
	The circuit breaker tripped or a blown fuse.
	The light button is "OFF".
Vibrations.	Check to assure that the Wine Chiller is level.
The Wine Chiller seems to make too much noise.	The rattling noise may come from the flow of the
	refrigerant, which is normal.
	As each cycle ends, you may hear gurgling
	sounds caused by the flow of refrigerant in your
	Wine Chiller.
	Contraction and expansion of the inside walls
	-
	may cause popping and crackling noises.
The door will not close properly.	The Wine Chiller is not level.
The door will not close property.	The door is misaligned.
	The Wine Chiller is not level.
	The gasket is dirty.
Display fleebee Error measage "E0"	The shelves are out of position.
Display flashes Error message "E0"	Connection failure – there is a wire or component
	that is not connected correctly.
	Contact the Avanti Service Department –
	1 - 800 - 220 - 5570
Display flashes Error message "E1"	Temperature sensor failure.
	Contact the Avanti Service Department –
	1 - 800 – 220 - 5570
Display flashes Error message "E2"	Defrost sensor (Coil Sensor) failure.
, ,	Contact the Avanti Service Department –
	1 - 800 – 220 – 5570
Display flashes Error message "HH"	Temperature of inner cabinet is over 99°F / 37°C
Display flashes Error message "LL"	Temperature of inner cabinet is under 32°F / 0°C


TROUBLESHOOTING GUIDE

SERVICE FOR YOUR WINE CHILLER

We are proud of our customer service organization and the network of professional service technicians that provide service on your Avanti appliances. With the purchase of your Avanti appliance, you can have the confidence that if you ever need additional information or assistance, the Avanti Products Customer Service team will be here for you. Just call us toll-free.

AVANTI PRODUCTS CUSTOMER SERVICES		
Product Information	Whatever your questions are about our products,	
800-323-5029	help is available.	
Part Orders	You may order parts and accessories that will be	
800-220-5570	delivered directly to your home by personal	
	check, money order, Master Card, or Visa.	
In-Home Repair Service	An Avanti Products authorized service center will	
800-220-5570	provide expert repair service, scheduled at a time	
	that is convenient for you. Our trained servicers	
	know your appliance inside and out.	

WIRING DIAGRAM

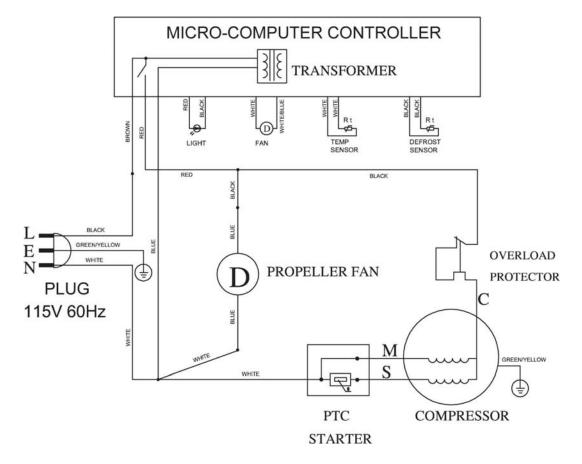

YOUR AVANTI PRODUCTS
WARRANTY

Staple your sales receipt here. Proof of original purchase date is needed to obtain service under warranty.

wairanty.			
WHAT IS COVERED – LIMITED ONE-YEAR WAR Avanti Products warrants that the product is free from de twelve (12) months from the date of purchase by the orig the date of purchase, and shall not be stalled, tolled, exter described in detail in the warranty document. For one ye Avanti products will, at its option, repair or replace any pa material or workmanship under normal use. Avanti Prod that is either new or factory refurbished. During this perior necessary to correct such defects free of charge, so long accordance with the written instructions in this manual. I days. All Avanti appliances of 3.5 cubic feet capacity or center for repair.	effects in materials and/or workmanship for a period of ginal owner. The foregoing timeline begins to run upon ended, or suspended for any reason whatsoever unless ear from the date of purchase by the original owner, art of the product which proves to be defective in lucts will provide you with a reasonably similar product od Avanti Products will provide all parts and labor g as the product has been installed and operated in In rental or commercial use, the warranty period is 90		
LIMITED SECOND THROUGH FIFTH YEAR WAR For the second through the fifth year from the date of orig replacement compressor free of charge due to a failure. charges. In rental or commercial use, the limited compre involved to move the product to the service center and ba user's responsibility.	ginal purchase, Avanti Products will provide a You are responsible for the service labor and freight essor warranty is one year and nine months. Costs		
WARRANTY EXCLUSIONS / WHAT IS NOT COVE			
The warranty coverage described herein excludes all def Products, including without limitation, one or more of the			
 regulations, or laws, including failure to install the product in strict conformity with local fire and building codes and regulations. Any external, elemental and/or environmental forces and factors, including without limitation, rain, wind, sand, floods, fires, mud slides, freezing temperatures, excessive moisture or extended exposure to humidity, lightning, power surges, structural failures surrounding the appliance, and acts of God. 			
 Content losses of food or other content due to spoilage. 	• Shipping and handling costs associated with the replacement of the unit.		
 Incidental or consequential damages 	 Repairs performed by unauthorized servicers. Service calls that are related to external problems, 		
 Parts and labor costs for the following will not be considered as warranty: 	such as abuse, misuse, inadequate electrical power, accidents, fire, floods, or any other acts of		
• Evaporator doors, door springs, and/or frames.	God.Failure of the product if it is used for other than it		
 Inner door panels, door shelves, door rails, and/or door supports. 	intended purpose.		
Chest freezer lid liners.	The warranty does not apply outside the Continental USA.		
Vegetable crispers.	Surcharges including but not limited to, any after		
 Light bulbs and/or plastic housing. 	hour, weekend, or holiday service calls, tolls, ferry trip charges, or mileage expense for service calls to		
Plastic cabinet liners.	remote areas.		
 Punctured evaporator that voids the warranty on the complete sealed system. 			
In no event shall Avanti Products have any liability or res property, including cabinetry, floors, ceilings, and other s excluded from this warranty are scratches, nicks, minor c and exposed parts; Products on which the serial number	tructures and/or objects around the product. Also dents, and other cosmetic damages on external surfaces is have been altered, defaced or removed; service visits wrong with the product; correction of installation problems for the product, including all electrical, plumbing and/or and for any alterations including without limitation		

OUT OF WARRANTY PRODUCT

Avanti Products is under no obligation, at law or otherwise, to provide you with any concessions, including repairs, pro-rates, or product replacement, once this warranty has expired.

WARRANTY - REFRIGERATION - COMPRESSOR

INSTRUCCIONES DE SEGURIDAD

ATENCION

INSTRUCCIONES PARA LA CONEXION A TIERRA

Este aparato electrodoméstico debe estar conectado a tierra. En caso de un cortocircuito eléctrico, la conexión a tierra reduce el riesgo de choque eléctrico proporcionando un cable a tierra con una enchufe de conexión a tierra. Este enchufe debe estar conectado en un tomacorriente instalado correctamente y conectado a tierra.

ADVERTENCIA – El uso inadecuado del enchufe de conexión a tierra puede resultar en un riesgo de choque eléctrico. Consulte con un electricista o persona de reparaciones competente si no comprenden bien las instrucciones de conexión a tierra o si existe alguna duda sobre si el aparato esta conectado a tierra correctamente.

NO USE UN CORDON DE PROLONGACION ELECTRICA

Use un tomacorriente de pared exclusivo. No conecte su vinera a cordones de prolongación eléctrica o junto a cualquier otro electrodoméstico en el mismo tomacorriente de pared.

ADVERTENCIA IMPORTANTE:

Una vinera vacía es una atracción muy peligrosa para los niños. Saque todas las juntas, pestillos, tapas o puerta de todo electrodoméstico que no esté en uso, o tome alguna medida para asegurar que no presente peligro.

INSTRUCCIONES DE INSTALACION

Saque los embalajes exteriores, limpie bien el exterior con un paño suave seco, y el interior con un paño húmedo y tibio. Evite colocar la vinera cerca de una fuente de calor, luz de sol directa, o lugar húmedo.

<u>Ubicación</u>

- 1. Seleccione un lugar con su piso fuerte y nivelado.
- 2. Evite la luz directa del sol o calor. La luz directa del sol puede afectar la capa de acrílico. Las fuentes de calor en su proximidad provocarán un consumo mayor de electricidad.

OPERACION

Para evitar vibraciones, la unidad debe estar bien nivelada. La temperatura variará dependiendo de la cantidad de botellas almacenadas y la frecuencia con que se abre la puerta.

Cuando la vinera no se use por un período largo, desconecte el enchufe y deje la puerta entreabierta.

Nota: Espere entre 3 a 5 minutos antes de volver a encender si el funcionamiento ha sido interrumpido.

Se recomienda que Ud coloque su vinera en un lugar donde la temperatura ambiental se mantenga entre 23-25 grados centígrados.

Si la temperatura ambiental oscila afuera de esos límites, pueda afectar la temperatura de la caja. Por ejemplo, si su unidad está situada en lugares donde hay temperaturas muy frías o calientes también puede afectar la temperatura de la caja. Temperaturas recomendadas para enfriar vinos:

Vinos tintos	15º - 18º C	58 – 65° F
Vinos blanco/seco	9º - 14º C	48 – 57° F
Vinos rosé/Zinfandel	10º - 11º C	49 – 51° F
Vinos blanco/espumante	5° - 8° C	40 – 47° F

Control de temperatura							
ON/O			LIGHT *F/°C RESET PWR LOSS				
*	+ , -		. / 0 1				
*	Botón de encender / apagar la unidad . Interruptor de la luz interior		Interruptor de la luz interior				
+	Selector de bajo consumo de energía		Selector grados °F o °C				
,	Botones para ajustar la temperatura	Botón para apagar el sonido de alarma					
-	Pantalla electrónica	Indicadores de aviso					

ENCENDIDO/APAGADO

Para apagar el refrigerador de vino, presione el botón (${}^{\circlearrowright}$) y manténgalo oprimido por un mínimo de 3 segundos.

PANEL DE CONTROL DE SEGURIDAD

- Su vinera está equipada con un Panel de Control de Seguridad de función automática. Esta función previene cualquier cambio no deseado en el control de temperaturas.
- La función de seguridad se activará automáticamente 12 segundos después de la última vez que cualquier botón del Panel de Control sea oprimido.

Operación

Oprima los botones marcados "(\bigtriangleup) " y " (\bigtriangledown) " y localizados en el panel de controles para programar la temperatura. Al oprimir los botones marcados " (\bigstar) " o " (\bigtriangledown) " por primera vez, el indicador en la pantalla mostrará la temperatura programada de fábrica o la más reciente.

Oprima el botón marcado () una vez y la temperatura aumentará un grado. Si Ud oprime el botón marcado (\bigtriangledown) una vez la temperatura bajará un grado.

CARACTERISTICAS ESPECIALES

ECON	La unidad está equipada con un aditivo que le permite funcionar en Modo de Bajo Consumo de Energía (ECON: ECONOMY MODE). Este funcionamiento ECON le permite reducir el consumo de energía al apagar todas las luces indicadoras y la pantalla electrónica LED. Para activar el funcionamiento ECON, presione el botón ECON hasta que la luz indicadora de color verde se ilumine. Para desactivar el funcionamiento ECON, simplemente presione el botón ECON otra vez.
PWR LOSS	Una característica que hemos integrado a esta unidad es una alarma que indica cuando se va la electricidad o apagón. En caso de apagón, el indicador PWR LOSS va a parpadear y una alarma sonará continuamente. Para apagar la alarma simplemente presione el botón RESET que se encuentra debajo.
DOOR	Si la puerta está entreabierta o abierta por más de 5 minutos, entonces el indicador DOOR (Puerta) se va a activar. El indicador DOOR va a parpadear y una alarma intermitente sonará cada 60 segundos. Para apagar la alarma simplemente cierre la puerta correctamente o presione el botón RESET que se encuentra debajo.
FILTER	Otra característica que hemos integrado en esta unidad es el indicador para cambiar el filtro (FILTER). Cuando la unidad haya estado en uso por 12 meses, la luz indicadora FILTER va a parpadear, recordándole que es tiempo de cambiar el filtro. Después de cambiar el filtro presione el botón RESET (que se muestra abajo) para que el contador de tiempo se vuelva a activar en los próximos 12 meses.
()	El botón RESET se usa para reactivar cualquiera de los indicadores mostrados arriba (PWR LOSS, DOOR, FILTER). Al apretar el botón RESET, cualquiera de los indicadores que estén encendido, se volverán a reactivar.

Luz interior

La luz interior se controla manualmente y no funciona al abrir ni cerrar la puerta. Para prender o apagar la luz, presione el boton marcado ($(\overline{\underline{A}})$) de la luz ubicado en el panel de control.

<u>Cerradura de la puerta</u>

Su unidad viene equipada con una combinación de cerradura y llave. Las llaves (2) están dentro de la bolsa plástica junto al manual de instrucciones. Introduzca la llave en la cerradura y gírela hacia la izquierda para abrir la puerta. Para cerrarla, gire la llave hacia la derecha. Quite la llave y colóquela en un lugar seguro para evitar que se pierda.

Descongelación

Su vinera ha sido diseñada con un sistema de descongelación de "ciclo automático".

Las superficies refrigeradas del compartimiento para vinos se descongelan automáticamente, durante el ciclo "apagado" del control de enfriamiento (termostato). El agua descongelada del compartimiento es eliminada automáticamente, encauzándola hacia una bandeja de goteo ubicada en el area del compresor. La transferencia de calor del compresor evapora el agua.

ADVERTENCIA

Asegúrese de tener la puerta abierta completamente se Ud desea remover las repisas o moverlas hacia adelante para extraer una botella.

NOTA:

Para remover las repisas corredizas, vacíe las repisas antes de sacarlas. Hálelas aproximadamente la mitad hacia afuera hasta que el raíl se alinee con el poste plástico en ambos lados. Levante cada repisa y sáquela suavemente de la unidad. Para reemplazar de nuevo la repisa, repita los pasos anteriores en dirección opuesta.

CUIDADO Y MANTENIMIENTO

Limpieza

Para limpiar el interior, use un paño suave con una solución de una cucharada de bicarbonato de sodio por cada cuarto de agua, o una solución de espuma de jabón suave, o un detergente suave. Para lavar las rejillas, sáquelas deslizándolas con cuidado, y use una solución de detergente suave; luego séquelas con un paño suave. Limpie el exterior con un paño húmedo suave y un poco de detergente suave o productos de limpieza para electrodomésticos.

Período de vacaciones

Para períodos cortos de vacaciones, deje los controles en la posición normal. Durante ausencias más largas;

- (a) saque todas las botellas,
- (b) desconecte la vinera del tomacorriente,
- (C) limpie bien el refrigerador para vinos,
- (d) deje la puerta abierta para evitar la formación de condensación, moho u olores.

Corte de corriente

La mayoría de los cortes de corriente se corrigen en una o dos horas y no afectarán las temperaturas de su vinera. Sin embargo, Ud. deberá reducir la cantidad de veces que abra la puerta cuando la corriente esté apagada.

Si Ud. se muda

Saque o asegure todos los artículos dentro de su vinera. Para evitar que los tornillos nivelantes se averíen, gírelos completamente hacia la base.

Algunas reglas importantes para el uso correcto de la vinera.

- Las bebidas se deben guardar en botellas cerradas.
- No sobrecargue el compartimiento interior.
- No abra la puerta a menos que sea necesario.
- Si la vinera se guardara sin uso por períodos largos, se sugiere que, luego de una limpieza cuidadosa, se deje la puerta entreabierta para permitir que el aire circule dentro de la caja y evitar una posible formación de condensación, moho u olores.
- Nunca cubra los estantes del compartimiento para vinos con papel de aluminio o cualquier otro material para cubrir estantes que puedan obstruir la circulación del aire.

Registration Information

Thank you for purchasing this fine Avanti product. Please fill out this form and return it to the following address within 100 days from the date of purchase and receive these important benefits: Avanti Products, A Division of The Mackle Co., Inc. P.O.Box 520604 – Miami, Florida 33152

Ö Protect your product:

We will keep the model number and date of purchase of your new Avanti product on file to help you refer to this information in the event of an insurance claim such as fire or theft.

Ö Promote better products:

We value your input. Your responses will help us develop products designed to best meet your future needs.

-----(detach here)-----

Avanti Registration Card

Nama			Model #	Serial #	
Name			Model #	Serial #	
Address			Date Purchased	Store / Dealer Name	
City	State	Zip	E-mail Address		
Area Code	Phone Numb	ber	Occupation		
Did Vau Dura		a al Mana atu			
Did You Purchase An Additional Warranty			As your Primary Residence, Do You:		
f Extended			f Own f Rent		
f None					
			Your Age:		
	hoosing This Av		f under 18 f 18-25 f 26-30		
	te the most imp		f 31-35 f 36-50 f over 50		
	ed your decision	n to purchase	Marital Status:		
this product:			f Married f Single		
f Price					
f Product Fe	atures		<u>Is This Product Used In The:</u>		
f Avanti Rep	utation		f Home f Business		
f Product Qu	ality				
	n Recommend	ation	How Did You Learn About This Product:		
f Other:			f Advertising		
J	lative Recomm	endation	f In-Store Demo		
f Warranty			f Personal Demo		
f Other:					
Comments:					
Commenta.					

Ver. 2.0 - 11-02-2011

PRINTED IN CHINA

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com