

MODEL MT2136E/G Gas/Electric Conveyor Oven



OPTIONS AND ACCESSORIES (AT ADDITIONAL CHARGE)

- Legs/casters:
 - 17-1/4" (438mm) black legs with casters
 23-1/4" (591mm) black legs with casters
 - □ Triple stack base with casters
- Shelf extension:
 - □ 6" (152mm)
 - □ 12" (304mm)
- Conveyor belt configurations:
 - Twin belt-two 10" (254mm) wide belts
 - Split belt one 8" (203mm) and one 12" (305mm) belt
- Flexible gas hose with quick disconnect and restraining device:
 - □ 36" (914mm)
 - □ 48" (1219mm)

Note: Two 48" (1219mm) and one 36" (914mm) hose on triple model

- □ 10' (3.0M) cord with receptacle (gas model only)
- □ Side loading glass door and handle
- Stacking rails
- Stainless steel interior (available with remote control ovens only)
- One year additional extended warranty

OPTIONS AND ACCESSORIES

- (AT NO ADDITIONAL CHARGE)
- Remote computerized controls

Project _____

Item No.

Quantity

Blodgett conveyor oven with 21" (533mm) wide belt and 36" (914mm) baking zone length. Single, double or triple stack models are available. All data is shown per oven section, unless otherwise indicated.

EXTERIOR CONSTRUCTION

- Stainless steel front, top and sides
- Aluminized steel back and bottom
- 1-1/2" (38.1mm) Vitreous fiber insulation at bottom, back and top
- Ceramic fiber insulation at blower installation

INTERIOR CONSTRUCTION

- Aluminized steel nozzles and bottom surface
- Adjustable aluminized steel air flow plates at top
- 21" (533mm) stainless steel wire mesh conveyor belt
- Two single inlet blowers above the combustion area or heater for air circulation

OPERATION

- Heat transferred through forced convection (impingement)
- Open vented baking compartment
- Electronic spark ignition control system (gas model)
- Gas power type burner has mixer with adjustable shutter and sight window (gas model)
- Internal gas pressure regulator (gas model)
- Tubular resistance heat (electric model)
- Integral or remote microprocessor based controls with solid state 600°F (315.5°C) maximum thermostat and belt speed control with digital display
- Two blower motors (1/8 HP minimum) with thermal overload protectors
- Three blower area cooling fans


STANDARD FEATURES

- Computerized front mounted controls
- Belt direction: (must specify)
 - □ left to right □ right to left
- Product stops
- Oven start-up
- One year parts & labor warranty*
- * For all international markets, contact your local distributor.



BLODGETT OVEN COMPANY

www.blodgettcorp.com 50 Lakeside Avenue, Burlington, VT 05402 Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183

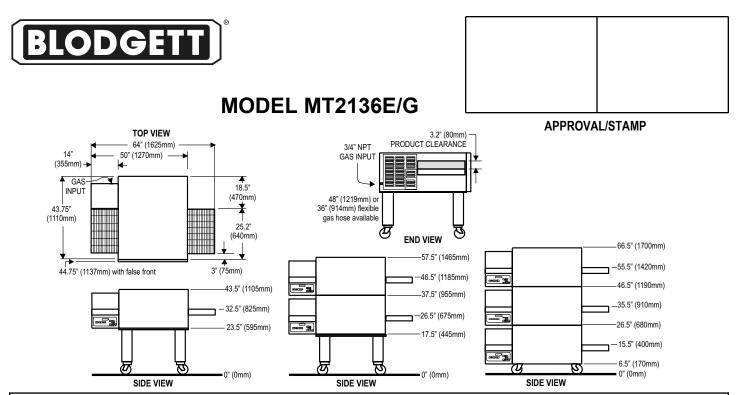

SHORT FORM SPECIFICATIONS

Provide Blodgett conveyor model MT2136(G/E) conveyor oven. Unit shall be (gas fired/electrically heated) and shall cook by means of forced, heated air impingement. Unit shall be (single/double/triple) deck supported by (specify stand type from options list). Each deck shall be fully independent, of stainless steel construction, and fully insulated on all sides. Provide with (electronic spark ignition gas fired/electrically heated) baking compartment with two blowers to evenly distribute heat across baking zone. Conveyor belt shall be 21" (535mm) wide and constructed of stainless steel wire mesh; baking zone length shall be 36" (915mm). (Front mounted/remote) control panel shall be solid state with 600°F (315.5°C) maximum thermostat and digital display of adjustable belt speed. Provide start-up inspection service by a factory authorized service agent. Provide options and accessories as indicated.

DIMENSIONS:	POWER SUPPLY (must have dedicated ground)								
Floor space	43.75" (1110mm) W x 64" (1625mm) L	MT2136E							
Product clearance	3.2" (80mm)	V.A.C.	Hz	Phase	K.W.		Ar	npere	S
Combustible wall clearance	0" (0mm) gas and electric					L1	L2	L3	L4
Belt width		DOMESTIC							
Standard belt	21" (535mm)	208	60	1	16	76	76	-	-
Option twin belt	10" (255mm) each	240	60	1	16	66	66	-	-
Split belt	One 8" (203mm) and one 12" (305mm)	208	60	3	16	44	44	44	-
Baking zone length	36" (915mm)	240	60	3	16	38	38	38	-
GAS SUPPLY:		INTERNATIO	NAL						
		220	50	1	16	73	73	-	-
3/4" NPT		240	50	1	16	66	66	-	-
MAXIMUM INPUT:	MT0426E	220/380	50	3N	16	24	24	24	-
MT2136G Single 55,000 BTU/hr	MT2136E 16 KW	240/415	50	3N	16	23	23	23	-
Single 55,000 BTU/hr Double 110,000 BTU/hi		CE MODEL							
Triple 165,000 BTU/hi		230/400	50	3N	16	22	22	22	-
	.5" W.C. for natural gas	This oven con	itains a me	ercury relay	/. DO NOT	put me	rcury	relay	in trash
11.0" W.C. for propane gas		Relay must be recycled or disposed of as hazardous waste.							
Maximum Gas Pressure: 10.5" W.C. for natural gas 13" W.C. for propane gas		MT2136G							
		DOMESTIC 3-wire (incl. neutral and ground) 5 amp. 120/208-240 VAC, 1 phase, 60 Hz							
				ground) 5 a	mp. 120/20	18-240 \	AC, 1	pnas	e, 60 Hz
MINIMUM ENTRY CLEARANCE:		INTERNATIONAL							
Uncrated 27" (686mm)		3-wire with ground, 4 amp. 220/240 VAC, 1 phase, 50 Hz							
Crated 20" (508mm)		CE MODEL 230VAC, 50 Hz, 5 amp., 2 wire with ground							
SHIPPING INFORMATIO	NI ·	230VAC, 50 F	iz, 5 amp.	, z wire wit	n ground				
Approx. Weight: Crate					2.1.1.1.				
	os. (271 kg) 460 lbs. (209 kg)	NOTE: The company reserves the right to make substitutions of components without prior notice							
	lbs. (543 kg) 920 lbs. (418 kg)	ponents witho	ιαι μποι πο						
	lbs. (814 kg) 1340 lbs. (609 kg)	BLODGETT OVEN COMPANY							
*Add: 37 lbs. (17kg) - triple casters; 70	lbs. (32kg) - 17-1/4" legs; 87 lbs. (39kg) - 23-1/4" legs			www.blodg					
Crate sizes:	50 Lakeside Avenue, Burlington, VT 05402								

27" (686mm) x 49-1/2" (1257mm) x 72" (1829mm) Printed in U.S.A.

Toll Free: (800) 331-5842 • Phone: (802) 860-3700 • Fax: (802) 864-0183 NOTE: FOR COMMERCIAL USE ONLY

P/N M9990 Rev F (6/01)

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com