



Energy Saver

Power Direct Vent Light Commercial Gas Water Heaters




- ◆ 48 to 75 gallons/60,000 to 70,000 BTU
- ◆ PVC, ABS & CPVC vent (3" or 4")
- ◆ Sealed combustion
- ◆ Electronic ignition and controls
- ◆ Non-CFC foam insulation
- ◆ Automatic blower motor
- ◆ Glass-lined storage tank
- ◆ Side connections
- ◆ Sediment reduction system
- ◆ Standard and ASME construction
- ◆ NSF kit available
- ◆ Design certified by CSA International (formerly AGA/CGA)
- ◆ 3-Year Limited Tank/1-Year Limited Parts Warranties





**Power Direct Vent
Light Commercial
Gas Water Heaters**

This product is available from:

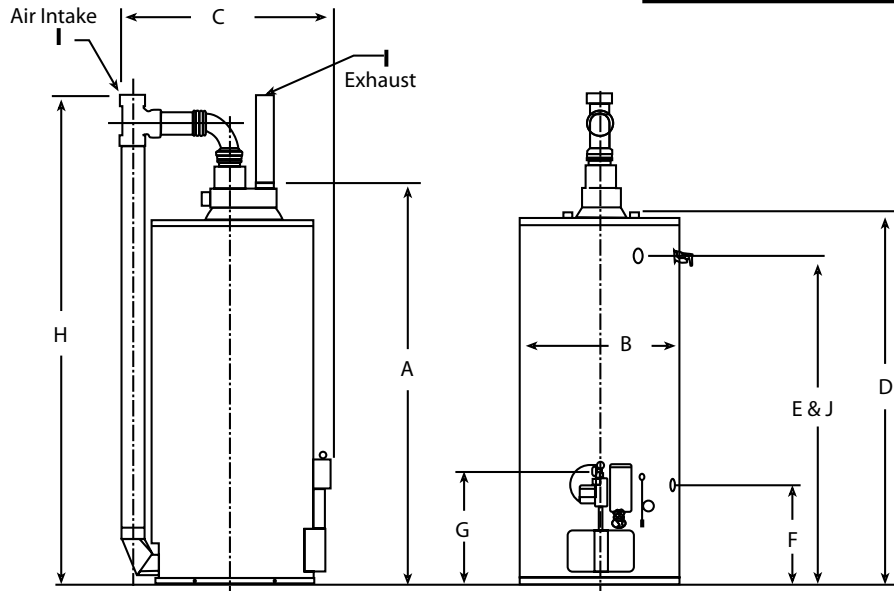

MODEL NUMBER	STORAGE (GAL)	RATED INPUT (BTU/HR)	RECOVERY @ 100°F RISE (GPH)	DIMENSIONS (INCHES)										SHIPPING WEIGHT (LBS)
				A HEIGHT TO EXHAUST OUTLET	B JACKET DIA.	C GAS VALVE TO AIR INLET	D HEIGHT TO WATER CONN.	E FLOOR TO SPACE HEATING SUPPLY	F FLOOR TO SPACE HEATING RETURN	G HEIGHT TO GAS CONN.	H HEIGHT TO AIR INTAKE OUTLET	I EXHAUST/ AIR INTAKE DIA.	J HEIGHT TO T&P CONN.	
50PDX-60	48	60,000	58	65-1/2	22	30-1/2	59-3/4	52-1/4	15-3/4	17-3/4	79-1/2	3	52-1/4	212
60PDX-65	65	65,000	63	68-3/4	22	31-1/2	62-3/4	56	15-3/4	17-3/4	82-1/4	3	56	246
75PDX-70	75	70,000	68	68	26	34-1/2	62-1/2	54-1/4	19	20-1/2	82-1/4	3	54-1/4	301

Propane Gas Inputs (LP)		1ST HR. DEL GAL. @ 100° F RISE	RECOVERY GPH @ DEGREE RISE		
			40° F	100° F	140° F
65PDX-65-XA	60,000 BTUH	104	145	58	41

MAXIMUM HORIZONTAL OR VERTICAL VENT*
 3" PVC, ABS & CPVC 25 ft.
 4" PVC ABS & CPVC 60 ft.
 (3) 90° ELBOWS

Natural Gas use suffix "NA"; Example: 50PDX-60-NA

LP use suffix "XA"; Example: 50PDX-60-XA

These models meet or exceed the Thermal Efficiency and Standby Loss Requirements of ASHRAE 90.1b current standard.

110 V A.C. Required
T&P Valve, Brass Drain Valve, Dielectric Fittings, Magnesium Anode Rods: Factory Installed

Pressures (all): Working Pressure, 150 psi; Tested Pressure, 300 psi

Note: The vent distances displayed are for one section of the venting system. Allows for 25 feet with 3 elbows for the exhaust section and 25 feet with 3 elbows for the air intake section. For further details refer to installation instructions.

Warning: Installation should be in accordance with all national and/or local codes. In the absence of local codes, refer to NFPA 54 or ANSI Z21.10.1.

Caution: The recommended maximum hot water temperature setting for normal residential use is 120°F. Bock recommends a tempering valve or anti-scald valve be installed and used according to the manufacturer's directions to prevent scalding.



www.bockwaterheaters.com
110 South Dickinson Street, Madison, Wisconsin 53703
Toll Free 800.794.2491 • Phone 608.257.2225 • Fax 608.257.5304



80030 Rev 6/08

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>