

esprit
GEMINI

USER GUIDE



ESPRIT GEMINI INSTRUCTIONS BWL-0353/1 (04/05)
BOWENS INTERNATIONAL LIMITED

355 Old Road
Clacton on Sea
Essex CO15 3RH UK

Tel: +44 (0)1255 422807
Fax: +44 (0)1255 436342


www.bowens.co.uk

BOWENS[®]
the power behind the picture™

Description	Page
Introduction and Safety Notes	3
Control Panels	4
Connecting & Using the Esprit Gemini	5
Mounting	5
Fitting the Modelling Lamp	6
Flash Power Control	6
Synchronisation	6
Modelling Lamp control	7
Fuse	7
Audible Ready Beep	7
Fitting / Removing Reflectors	7
Flash Tube Replacement	8
Gemini Accessories	9
Specifications	10 - 11

GM250	GM500	GM750+
250Ws	500Ws	750Ws
5V	5V	5V
5600K ±300K	5600K ±300K	5600K ±300K
230V - 5A (F) 115V - 10A (T)	230V - 5A (F) 115V - 10A (T)	10A (T) Fuse
190-250V AC 50Hz (95-130V AC 60Hz)	190-250V AC 50Hz (95-250V AC 60 Hz)	190-250V AC 50Hz (95-250V AC 60Hz)
±1%	±1%	±1%
56.1	79.8	104.4
0.81 (1.1) secs	1.54 (1.95) secs	1.41 (2.14) secs
Full / Intermittant / Off	Full / Intermittant / Off	Full / Intermittant / Off
1/1315	1/925	1/2380
Full to 1/32 5 stops	Full to 1/32 5 Stops	Full to 1/32 5 Stops
Max 275W	Max 275W	Max 275W
100%	100%	100%
Clear = BW2030 UV = BW2032	Clear = BW2030 UV = BW2032	Clear = BW2980 UV = BW2032
On/Off	On/Off	On/Off
On/Off	On/Off	On/Off
275W Photoflood 250W Halostar	275W Photoflood 250W Halostar	275W Photoflood 250W Halostar
2.9Kg	3.4Kg	4.0Kg
365 x 145 x 130mm	365 x 145 x 130mm	365 x 145 x 130mm

Due to our policy of constant product improvement, Bowens International reserves the right to change equipment specifications at any time and without notice.

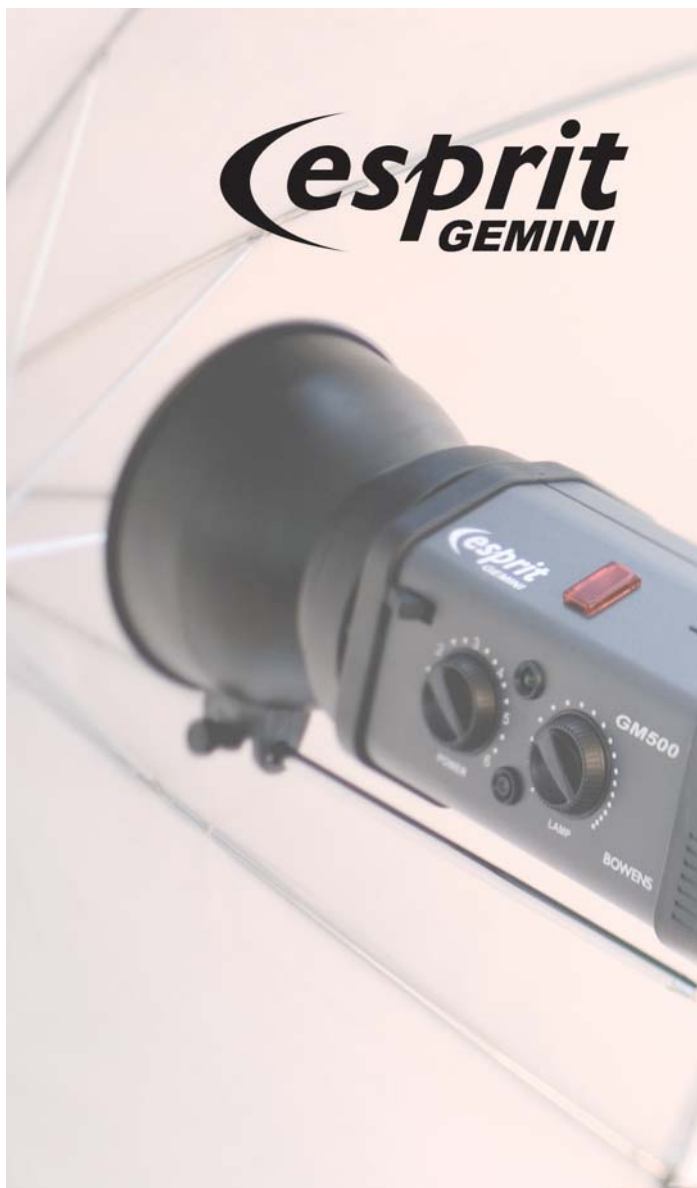

Unit
Stored Energy (max)
Sync Voltage
Flash Colour Temperature
Circuit Protection
Supply Voltage Range 230V (117V)
Voltage Stabilisation
Guide Number (Full power, 50° Keylite, ISO 100)
Typical Recycle Time Full Power, 230V, 50Hz (117V 60Hz)
Modelling Power Control
Flash Duration (t=0.5) (Full power)
Flash Power Control
Modelling Lamp
Ready Indication
User Replaceable Flash Tube
Photocell
Audio Ready Signal
Recommended Modelling Lamps
Weight
Dimensions (l x w x h)

Dear Valued Customer,

Thank you for choosing the Bowens Esprit Gemini professional flash system. Accurate, ergonomic, powerful and simple to use, the Esprit Gemini was designed by working closely with photographers to develop a flash that meets the standards demanded in professional studios today.

All 'S-Type' accessories from the Bowens range can be used with the Esprit Gemini. For details of all related products, please contact your local distributor, a list of which can be found at www.bowens.co.uk.

In order to obtain the full benefit from your purchase, please take a few moments to familiarise yourself with this user manual.

Thank you.
Bowens International Ltd.

Safety Notes

DO NOT:

- Use in an environment where moisture or flammable vapor is likely to come in contact with the unit.
- Plug the Gemini Esprit into a mains supply and a battery at the same time.
- Restrict air vents while in use.
- Use a unit with damaged housing, moldings, flash tube or modelling lamp.
If the unit is dropped or damaged in any way, always have it checked out before using.
- Operate the unit without a safe grounded (earthed) AC supply.


DO:

- Switch power off and disconnect from the supply before changing modelling bulb or flash tube.
- Disconnect the supply before changing the fuse. Never replace with a fuse of a different rating. A spare fuse is fitted in the fuse holder.
- Exercise care when handling equipment that has been in use. The reflector and front end of the unit can become Very Hot.
- Avoid placing cables where they can be tripped over. Protect from heavy, sharp or hot objects, which may cause damage and replace damaged cables immediately.
- Due to the high voltage / high energy used in Esprit Gemini Units, all servicing must be carried out by an authorised Service Centre.
- Remove the power cord by gripping the plug. NEVER pull the cord.
- Ensure that any extension cord used has a suitable current rating to prevent overheating and never use coiled extension cords.
- ALWAYS remove the flash head covers before using.

Rear Control Panel



Side Control Panel

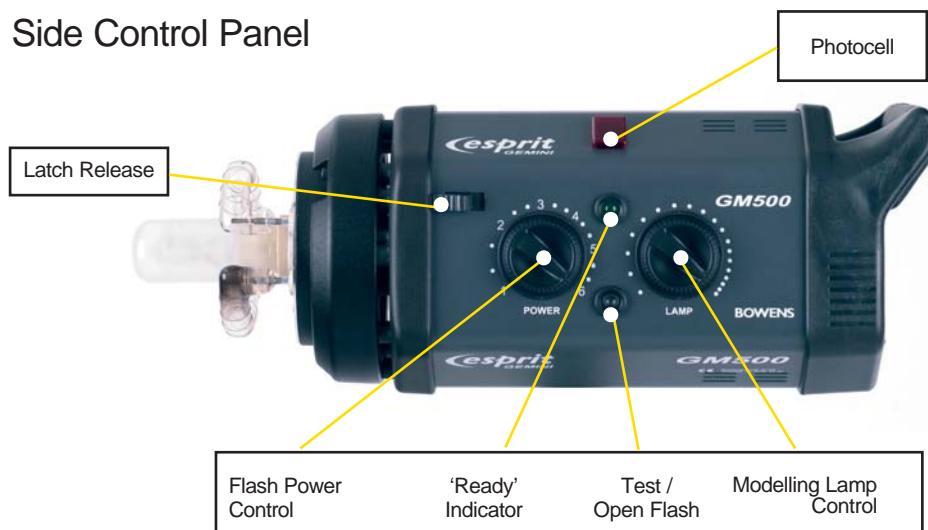

Visit www.bowens.co.uk for the widest range of photographic lighting accessories

Pulsar Radio Trigger System

With the Esprit Gemini you are free from mains power cables. With the Pulsar Radio Trigger system you can free yourself from sync cables too!

This multifunctional device can be used to trigger flash units, film and digital cameras and light meters up to 100m away.

Because Pulsar is a radio transmitter, rather than IR, it allows for triggering around corners or through walls and is not affected by high ambient light situations. Choose from four individual channels and six studio selectors, each providing a unique ID for different flash devices or combine them to trigger all equipment within a given setup or studio.

Because of its low-voltage operation, it is perfect for digital cameras. Each unit can be used as either a transmitter or receiver and operates off of two AAA batteries.

Pulsar (**BW-5150**)



Flash Tube Replacement



Ensure that the unit is switched off and disconnected from the mains supply and then wait thirty minutes before touching / removing flashtube. Remove the protective cap and unwind the twisted Trigger wire from the flashtube support. Gently pull the flashtube assembly out of the unit.

To replace the assembly, hold the flashtube as shown and taking care to support both legs of the tube, gently but firmly, push the flashtube into position, and wind the Trigger wire around the flashtube support. Always replace with the correct flashtube assembly, BW-2032 UV coated. BW-2030 Clear (BW-2980 for 750+).



Travel-Pak



The Esprit Gemini is great in the studio, but what if you need to work on location?

Thanks to this handy battery pack, your Bowens Esprit Gemini Monoblocs can leave the studio to go on location anytime, anywhere!

Able to power two monoblocs simultaneously with a total power of up to 1500w/s, the Travel-Pak is capable of bringing a 500Ws unit to full charge as fast as 4.5 seconds, and can offer in excess of 200 flashes on a single charge.

With a fast/slow charge option to prolong battery life as well as a stylish carry bag offering protection from the elements and up to 3 inches of water, no location photographer should be without this unique power pack.

Dimensions - 180(l) x 120(w) x 175(h)mm
Weight - 4.1kg
Travel-Pak (**BW-7630**)

Also available for the Bowens Travel-Pak:

BW-7635 Travel-Pak Boost Battery.

BW-7632 Travel-Pak to Gemini Spare Cable.

BW-1227 Bowens Universal 2Amp SLA Charger.

Connecting & Using the Esprit Gemini

The Esprit Gemini unit may be operated either on a mains supply or with a Bowens battery source such as the Bowens Travel-Pak.

!!! WARNING HIGH VOLTAGE !!!

NEVER CONNECT THE ESPRIT GEMINI TO BOTH A MAINS SUPPLY AND A BATTERY SUPPLY AT THE SAME TIME. THIS APPLIANCE MUST BE EARTHED WHEN USED WITH MAINS. DISCONNECT THE MAINS LEAD, WHEN CHANGING MODELLING LAMPS & FLASH TUBES.

For mains operation, the mains switch (page 4) should be in the upper position. For battery operation the switch should be in the lower position. The centre position is OFF.

NOTE: When operated from a battery source, the modelling functions are not available.

Ensure the power source is Off.

Connect the unit using the appropriate cabling.

If using a battery source, ensure the connector locks are fully tightened.

Switch the power source on, then switch on the Esprit Gemini.

The unit will charge and indicate it is ready for use by illuminating the Green READY light.

Press the TEST button to check the unit fires.

Mounting

Mount the Esprit Gemini unit on selected support system.

The mounting bush on the 'L' bracket allows for two possible ways of mounting to the stand / support (Fig.3). Method B may be found useful if the light is required to point down.





Figure 3



Fitting the Modelling Lamp



Switch off and disconnect from the supply. Screw modelling lamp into ES lampholder in the centre of the reflector. Allow lamp to cool before removing.

Note: It is recommended that a Photoflood or Halostar bulb with a maximum wattage of 275W is used. The manufacturer will not accept liability on the use of any lamp with a greater wattage than 275W.

Flash Power Control

The flash power output is variable over five f-stops from full to 1/32 power. The maximum power available depends upon the model (See specification table) and is denoted by the number 6 on the control panel. The power settings are denoted in steps of 1/3 stop. The numeric divisions indicate full one stop divisions.

When switched 'ON' from either a mains or battery supply, the unit will charge. Once the unit has charged to the desired power level, the Green READY lamp will illuminate indicating that the unit is ready to fire.

Note: If the unit is subjected to rapid operation over extended periods, it may automatically go into an overheat condition. In this condition, the Green READY lamp will illuminate to indicate the presence of power, while the charging and modelling functions are disabled in order to allow the unit to cool. The unit will automatically resume operation once cooled sufficiently.

HINT - In an overheat condition, the unit will typically take 15 minutes to cool down. By switching OFF and then ON again after say 5 minutes, the unit can be re-activated in order to get a few extra shots if needed.

Synchronisation

There are several ways to trigger the Esprit Gemini

Open Flash:

For testing or multiple flash applications the Open Flash Pushbutton can be used.

Sync Socket:

The standard quarter inch jack type socket on the rear panel of the unit may be used for direct connection to a camera set to 'x' synchronisation. Two Esprit units may be connected together using a 'y' connector. An Infra Red Receiver or Omnicell may also be plugged into this socket. The socket operates at +5V and is safe for use on digital cameras.

Photocell:

The Esprit Gemini has a built in switchable photocell enabling the unit to be triggered by the flash from any other flash unit or a small camera mounted flash gun. The photocell is mounted behind the red transparent cover on the top of the unit. The photocell on/off switch is located on the rear control panel.

Modelling Lamp Control

With the modelling lamp control switch (Fig.1. 3) in the upper position the modelling light is OFF. With the modelling light set to centre the modelling light will go out when the unit is flashed and come back on when the unit comes to ready. This enables the photographer to see from the camera position that all Esprit units in use have fired. With the switch set in the lower position the modelling lamp stays on all the time. The modelling light may be varied in ratio with the flash power output by aligning the modelling Knob with that of the flash control (see page 4).

Fuse

The modelling and flash circuitry is protected by a single 20mm fuse mounted on the rear panel. Never replace the fuse with one of a different rating. As the fuse may blow when the modelling lamp fails always check the fuse when replacing the bulb. A spare fuse is supplied in the fuse holder. Always switch OFF and disconnect the Esprit Gemini unit from the power supply before changing the bulb or fuse.

Audible Ready Beep

Set the Sounder Switch to 'ON' to give a short beep when the unit comes to ready, to provide an audible 'Ready' confirmation. The sounder switch is located on the rear control panel (page 4).

Fitting / Removing Reflectors

A range of reflectors is available for the Esprit Gemini unit. To fit, slide the neck of the reflector over the front of the unit. Align the three pegs on the reflector with the three slots in the retaining ring. Press down and turn clockwise to lock.

To remove reflector, pull back Latch Knob (page 4), turn the reflector fully anti-clockwise and withdraw.

If an umbrella is to be used a 'Wide Angle Reflector' should be fitted and the umbrella fitted through the mounting hole in the mounting bracket and locked in position with the knurled screw.

Note: Take care when fitting / removing reflectors not to damage the flashtube assembly. The flashtube is very delicate, avoid unnecessary handling of the glass tube. Always switch off and disconnect from the mains supply before fitting and changing reflectors.

Warning High Voltage!

Do not touch the flashtube assembly for thirty minutes after disconnecting from supply.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>