



DR-SCANNERS

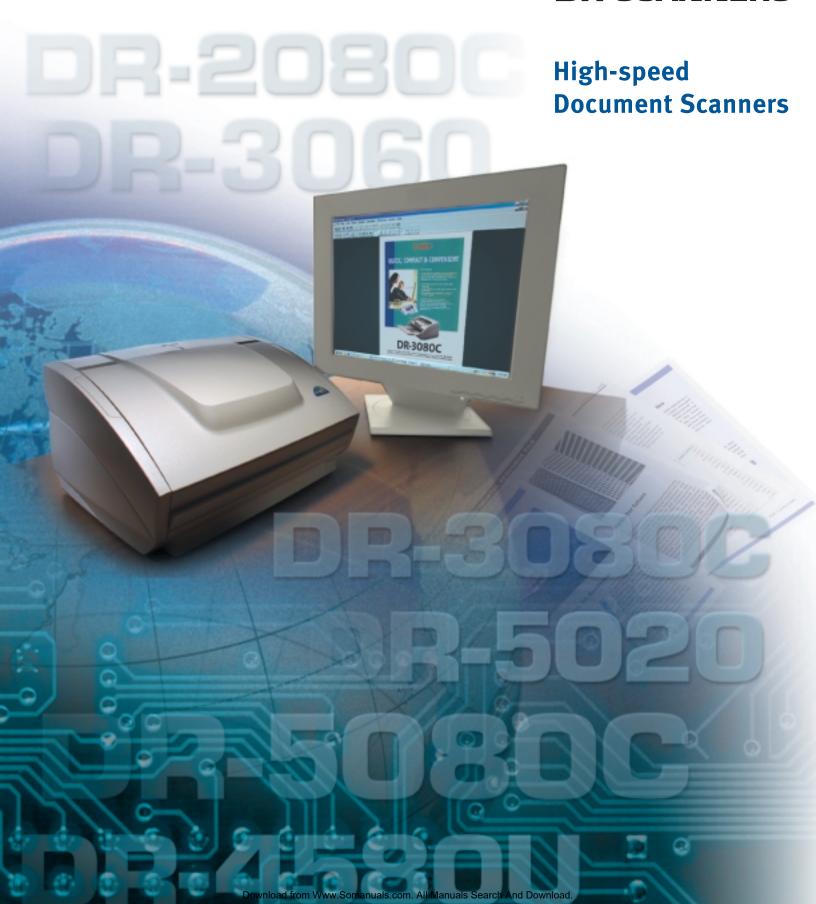

Performance and reliability run in the family.

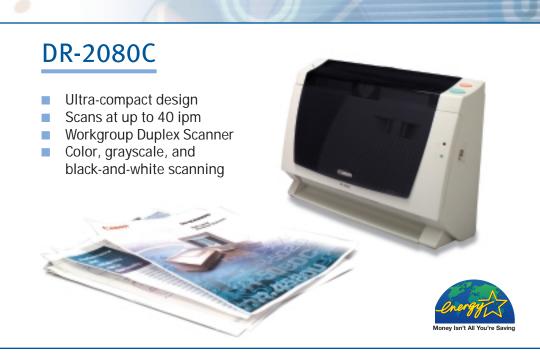

No matter which model you choose, innovation and value come standard. After all. that's what people expect from Canon's DR-Series Scanners, That's because our scanners offer the kind of high-performance features that make converting paper documents easier. Like high-speed color capability and even flexible configuration options. And with so much advanced scanning technology to choose from, you're sure to find the imaging muscle you're looking for. At Canon, we're giving people the know-how to take full advantage of the digital office.



DR-3060/DR-3080C

- Compact design
- Scans at up to 86 ipm
- Departmental Duplex Scanner
- High-speed grayscale scanning
- High-speed color scanning (DR-3080C only)




DR-4580U

- Flatbed or Automatic Document Feeder
- Scans at up to 92 ipm
- Universal Duplex Scanner
- "Dynamic Thresholding"
- Bar code recognition and Patch Code processing





- Production Duplex Scanner
- Scans at up to 180 ipm
- High-capacity document feeder
- Dynamic Skew Correction
- High-speed color and grayscale scanning (DR-5080C only)
- The optional Imprinter allows you to print32 alphanumeric digits on the scanned page
- Optional Endorser and Bar Code Decoder







	DR-4580U			DR-502	DR-5020/5080C		
Туре:	Universal Document Scanner			Desktop Document Scanner			
Item #:	7672A002			3610A002/3611A002			
Document Feeding:	Automatic or Manual			Automatic or Manual			
	Manual Placement on	Platen Glass					
Document Size:	ADF: Width: 4.2" - 12.	.0"		Width: 2-3/16" - 11-11/16"			
	ADF: Length: 5.8" - 17	7.0"		Length: 2-3/4" - 17"			
	Flatbed: Maximum W	x L: 11.7" x 1	7.0"				
Thickness:	Automatic Feeding: 0	.06mm - 0.15ı	mm	Automatic Feeding: 0.06mm - 0.15mm			
	Manual Feeding: 0.050mm - 0.15mm			Manual Feeding: 0.06mm - 0.20mm			
ADF Capacity:	200 Sheets			500 Sheets			
Output:	Black and White			Black and White			
	Grayscale: 2-bit, 3-bit, 4-bit, 8-bit			Grayscale: 8-bit Max., up to 256 Levels (DR-5080C only)			
				Color: 24-bit (DR-5080C only)			
Scanning Element:	Front: CCD/Back: CIS			Contact Image Sensor (CIS)			
Light Source:	Front: Green Cathode Tube/Back: Green/Red LED			LED			
Scanning Modes:	Simplex, Duplex, Black	ck and White		Simplex, Duplex, Black and White			
				Color and Grayscale (DR-5080C only)			
Drop-out color:	Green/Red One Side;	Two-sided wit	th	Three User-selectable Settings (RGB)			
	Optional Red Lamp			(DR-5080C only	(DR-5080C only)		
Scanning Resolution:	Scalable from 100 to 600 dpi in One-dpi Steps			200/300/400 dpi			
High-speed Mode				200 x 100 dpi (200 dpi)			
(Interpolated):	N/A			300 x 150 dpi (300 dpi)		
Scanning Speeds*	Simplex Du	ıplex	Flatbed	Simplex	Duplex		
Black and White:	56 ppm 92	? ipm	1.1 Seconds	53 ppm	105 ipm		
Black and White High Speed:	_	_	_	90 ppm	180 ipm		
Grayscale:	40 ppm 82	? ipm	_	31 ppm	45 ipm		
Color (24-bit):	_	_	_	10 ppm	14 ipm		
Color High Speed:	_	_	_	20 ppm	29 ipm		
Optical Resolution:	400 dpi			300 dpi			
Interface:	SCSI-II			SCSI-II			
Scanner Drivers:	For Windows 95/98/2	2000/Me/XP,		For Windows 95/98/2000/Me/XP,			
	Windows NT: ISIS, TW	/AIN		Windows NT: ISIS, TWAIN, Canon			
Dimensions (H x W x D):	12.9" x 18.3" x 28.8"			10-1/4" x 16-15/16" x 19-11/16"			
Weight:	68.2 lb.			44 lb.			
Power Requirements:	AC 120V/60Hz			AC 120V/60Hz			
Power Consumption:	Max. 135W			Max. 120W			
Options:	Imprinter	36	551A001	Endorser ED-60	00 w/Die Drum 300	3650A005	
	Ink Head for Imprinter	r 36	593A001	Die Drum 300 v	v/8 Digit Dater	3650A006	
	Red Lamp	36	551A002	Ink Roller, Black	k	6331A001	
	White Background Ur	nit 36	551A005	Ink Roller, Red		6334A001	
				Ink Roller, Purp	le	6333A001	
				Ink Roller, Gree	n	6332A00	
				Bar Code Decod	der	3650A003	
				Imprinter		3650A004	
				Ink Head for Im	printer	3693A00	
				Memory 128ME	3 for DR-5080C	3650A002	
				LED Sensor Uni	t (Red/Black) for DR-5020	3650A001	

^{*}Examples based on typical settings, rated in pages/images per minute with letter-sized documents, portrait-feeding direction at 200 dpi. Actual processing speeds may vary based on PC performance and application software.



SPECIFICATIONS

	DR-2080C		DR-3060/3080C			
Туре:	Compact Document S	canner	Desktop Document Scanner			
Item #:	7862A002		6899A002/6898A002			
Document Feeding:	Automatic or Manual		Automatic or Manual			
Document Size:	Width: 2.16" - 8.5"		Width: 2.2" - 10.1"			
	Length: 2.75" - 14"		Length: 2.8" - 14.3"			
Thickness:	Automatic Feeding: 0	.06mm - 0.15mm	Automatic Feeding: 0.06mm - 0.15mm			
	Manual Feeding: 0.05mm - 0.2mm		Manual Feeding: 0.06mm - 0.20mm			
ADF Capacity:	50 Sheets (Letter-sized)		100 Sheets			
Output:	Black and White		Black and White	Black and White		
	Grayscale: 8-bit, 256	Levels	Grayscale: 8-bit, 256	Grayscale: 8-bit, 256 Levels		
	Color: 24-bit		Color: 24-bit (DR-3080C only)			
Scanning Element:	Contact Image Sensor	(CIS)	Contact Image Sensor (CIS)			
Light Source:	LED		LED			
Scanning Modes:	Simplex, Duplex, Color	, Grayscale,	Simplex, Duplex, Black and White, Grayscale,			
	Black and White		Text Enhanced, Color and Dual Modes (DR-3080C only)			
Drop-out color:	RGB, User-selectable		RGB (DR-3080C only)			
Scanning Resolution:	100/150/200/300/400/600 dpi		100/200/300 dpi			
Scanning Speeds*	Simplex	Duplex	Simplex	Duplex		
Black and White:	20 ppm	40 ipm	32 ppm	64 ipm		
Black and White High Speed:		_	43 ppm (300 dpi)	86 ipm (300 dpi)		
Grayscale:	20 ppm	40 ipm	32 ppm	64 ipm		
Color (24-bit):	7 ppm	14 ipm	10 ppm	_		
Color High Speed:	10 ppm (150 dpi)	20 ipm (150 dpi)	21 ppm (100 dpi)	_		
Dual Mode (Color Front,						
Grayscale Back):		_	_	20 ipm		
Optical Resolution:	600 dpi		300 dpi			
Interface:	SCSI-II (Board and Cable Included)		SCSI-II	SCSI-II		
Scanner Drivers:	For Windows® 95/98/	'2000/Me/XP,	For Windows 95/98/2000/Me/XP,			
	Windows NT:® ISIS,™ T	WAIN	Windows NT: ISIS, TWAIN, Canon			
Dimensions (H x W x D):	8.25" x 11.7" x 3.89"		7.5" x 13.5" x 11"			
Weight:	5.5 lb.		17.8 lb.			
Power Requirements:	AC 120V/60Hz		AC 120V/60Hz			
Power Consumption:	Max. 28W		Max. 42W			
Options:	Optional Carrying Cas	se 0249V914	Endorser ED-500 w/l	Die Drum B110	3649A001	
			Die Drum B110 w/Da	ater	3654A003	
			Ink Roller, Black		6331A001	
			Ink Roller, Red		6334A001	
			Ink Roller, Purple		6333A001	
			Ink Roller, Green		6332A001	
					0134V880	

^{*}Examples based on typical settings, rated in pages/images per minute with letter-sized documents, portrait-feeding direction at 200 dpi. Actual processing speeds may vary based on PC performance and application software.



0134V882

Hard Carrying Case



DR-2080C Soft Carrying Case

Item #: 0249V914 Material: SYN 1680 PVC

Dimensions (H x W x D): 9-7/8" x 14" x 4"

Weight: Approx. 2 lb.



DR-3000 Series Soft Carrying Case

Item #: 0134V880

Material: Bag: PVC Synthetic #1680D Padding: PE Foam

Webbing: PVC

Dimensions (H x W x D): 13" x 9" x 14"

Weight: Approx. 4 lb.



Latches: Powder-coated Stainless Stee Foam: ELE (Ether-like Ester) Foam

Dimensions (H x W x D): 17-7/8" x 14-1/2" x 12"

Weight: Approx. 19 lb.









ED-500 Endorser for DR-3000 Series

Endorsement Position Dial: Adjusts the Endorsement Position Vertically

Endorsement Area: Checks: 1.10" - 2.56" Letter: 1.22" - 10.67"

Stamping Plate* (W x L): 1.18" x 1.57"

Dimensions (H x W x D): 7.20" x 13.39" x 6.06"

Weight: 9.48 lb. (With Power Supply)

 Endorser ED-500 w/Die Drum B110
 3649A001

 Die Drum B110 w/Dater
 3654A003

 Ink Roller, Black
 6331A001

 Ink Roller, Red
 6334A001

 Ink Roller, Purple
 6333A001

 Ink Roller, Green
 6332A001

As an Energy Star® Partner, Canon U.S.A., Inc. has determined that these products meet the Energy Star® guidelines for energy efficiency. Energy Star and the Energy Star certification are registered U.S. trademarks. Windows

and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. ISIS is a

trademark of Captiva Software Corporation. Canon is a registered trademark, and Canon Know How is a trademark of Canon Inc. MAGEANYWARE is a service mark of Canon U.S.A., Inc. All other terms and product names may be trademarks or registered trademarks of their

respective owners, and are hereby acknowledged.

All specifications are subject to change without notice.

ED-600 Endorser for DR-5000 Series

Endorsement Position Dial: Adjusts the Endorsement Position Vertically

Endorsement Area: Checks: .94" - 2.72"

Letter: 1.02" - 10.67"

Power: Supplied By Scanner

Stamping Plate* (W x L): 1.18" x 1.57"

Dimensions (H x W x D): 8.46" x 14.17" x 6.14"

Weight: 10.58 lb.

 Endorser ED-600 w/Die Drum 300
 3650A005

 Die Drum 300 w/8-digit Dater
 3650A006

 Ink Roller, Black
 6331A001

 Ink Roller, Red
 6334A001

 Ink Roller, Purple
 6333A001

 Ink Roller, Green
 6332A001




COPYTEX 1-800-832-7000 www.copytex.com

Canon U.S.A., Inc. One Canon Plaza Lake Success, NY 11042

0035W461

0103-DRFL-30M









Download from Www.Somanuals.com. All Manuals Search And Download.

^{*}Stamping Plate is sold separately.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com