

Subwoofers – PXW1241 Information



Model: PXW1241



- Black Powder Coat Cast Aluminum Basket
- Hi Performance Glass Fiber Cone
- High Performance Polycotton Spider
- High Heat Resistance 4-Layer Black Aluminum Bobbin EI Wire Voice Coil
- Single 4-ohm Voice Coil
- Powerful 62oz Magnet
- Stitched Rubberized PVC Gasket
- Chrome Plated Push Type Terminals
- S.E.T. (Spider Exhaust Technology)
- Chrome Plated Bumped Rear Vented Pole Piece
- 700-Watt Maximum Music Power

Maximum Power Handling (Coils in Series) 700W
 Continuous Power (Coils in Series) 350 W
 SPL (Coils in Series) 86.5dB
 Frequency Response 20 Hz to 1.8 kHz
 Woofer Cone Material Glass Fiber
 Woofer Magnet Strontium Ferrite
 Woofer Basket Aluminum
 Woofer Surround Rubber

Vented/Bass Reflex


MAXIMUM FLAT

Enclosure Airspace = 1.73ft³

$F_b = 49 \text{ Hz}$

$F_3 = 34 \text{ Hz}$

Port Size = 4" x 13"

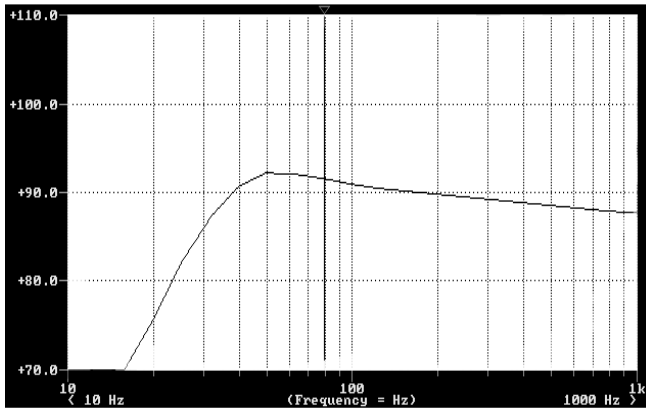

Thiele Small Parameters

Outside Diameter	12"
Mounting Hole	270mm
Mounting Depth	148mm
Sensitivity	86.5db
Max. Peak Music	700 W
Continuous Power	350 W
Nominal Impedance	4 Ohm
Re DC Imp. ($\pm 10\%$)	3.5 Ohm
Le	1.16/3.17mH
V.C. Diameter	50.8 mm
Sd	0.0495m ²
Vas	57.9867 litres
Fs	30.7061 Hz
Qts	0.4525
Qes	0.5136
Mms	158.3929g
Mmd	152.1631g
Rms	8.0450 Ω m
Bl	14.43 Tm
Speaker Displacement	0.0495m ²
Xmax	12mm
Magnet Weight	62oz

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>