

## CLASSIC CONVECTION STEAMERS 15 PSI BOILER BASE STYLE

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
FCSI Section \_\_\_\_\_  
Approval \_\_\_\_\_  
Date \_\_\_\_\_

### **Cleveland Classic Series** CONVECTION STEAMERS

TWO COMPARTMENT, PRESSURELESS  
200M BTU GAS FIRED STEAM GENERATOR  
24" WIDE CABINET BASE DESIGN, with NICKELGUARD™

**MODEL:**  24-CGM-200

#### **Cleveland Standard Features**

- Cooking Capacity for up to six 12" x 20" x 2½" deep Cafeteria Pans.
- Pressureless cooking with forced convection steam, permitting doors to be opened while cooking continues.
- Solid State Controls operate water level and safety functions.
- Each compartment is equipped with a 60 minute mechanical timer, separate bypass switch for constant steaming and a cold water condenser for superior cooking results.
- **Instant Steam Standby Mode:** Holds generator at steaming temperature. Allows unit to start cooking instantly.
- **Durable 14 Gauge Stainless Steel Construction:** For Compartment Door and Steam Cooking Cavity.
- **Separate Main Power Switch for "On/Off"**
- **Exclusive Steam Cooking Distribution System:** The exclusive Convection Jets produce a high velocity convection steam without fans. Coved Corner design in cooking compartment distributes heat evenly and is easy to keep clean. Creased top & bottom enhance drainage. Cold Water Condenser for each compartment maintains a dry steam. Fully insulated cooking compartment for thermal efficiency. Removable Stainless Steel Slide Racks for easy cleaning.
- **Exclusive "Cool to the Touch" Compartment Door Design:** Free floating inner door with reversible door gasket provides an air tight seal. Stainless Steel Slam/Latch Door Latch mechanism provides greater reliability.
- **Left Hand Door Hinging:** Compartment Doors hinged left, controls on the right.
- Modular Cabinet Base with Hinged Door.
- **High Efficiency Gas Steam Generator with NickelGuard,** Electronic Spark Ignition and Automatic Water Fill on start up.
- **Automatic Generator Drain at shutdown:** Contains a "Water Jet" Spray Rinse Cleaning Cycle to keep drain clear.
- **Automatic Generator Mineral Purging Cycle** automatically cleans generator, reducing scale build up
- **Automatic Water Level Control System** with Low Water Power Cut-off Circuit.
- Steam generator equipped with High Limit Pressure Safety Switch, 15 psi Safety Valve, and Steam Generator Pressure Gauge.
- **NSF Certified 6" Stainless Steel Legs** with adjustable flanged feet for a one inch level adjustment.
- Gas Pressure Regulator and Control Valve.
- Standard Voltage for Control: 115 volts, 60 Hz, single phase.
- All Controls are serviceable from the front.

#### **Options & Accessories**

- Right Hand Door Hinging, Controls on the Left (DHR)
- Electronic Timer with Compensating Load Feature (ETC)




#### **Short Form Specifications**

Shall be Two Compartments, CLEVELAND Convection Steamer, Model 24-CGM-200, Gas-fired Steam Generator, NickelGuard, 200M BTU. Solid State Controls operate timing, water level and safety functions. Steam Generator with Automatic Water Fill on start-up, Automatic Blowdown with additional Manual Drain Valve and Electronic Spark Ignition. For each cooking compartment: 60 minute Mechanical Timer, Manual Operation Mode and Cold Water Condenser. Type 304 Stainless Steel cooking compartment.

- ON/OFF Steam Switch only for compartment controls (MC)
- Cafeteria pans in depths of 1", 2½", 4" and 6"
- Power Take Off Kit (GPTO), Kettle Interconnecting Kit (IMK-)
- Correctional Packages
- Stainless Steel Base Frame (FSS)
- Stainless Steel Insulated Flue Cover (SSF)
- Quick Disconnect for gas line (QDC)
- Secondary Low Water Cut-Off, factory installed (CALG)  
(Required for AZ. AR. CA. CO. CT. DE. FL. GA. HI. IL. IA. KS. MD. MA. MI. MN. MT. NE. NV. NM. NC. OK. OR. PR. RI. TN. UT. VA. WA. WV., Buffalo, NY, Wash. DC)
- Compartment Door Steam Shut Off Switch (SCS)
- Boiler Descaling Pump Kit (107142)
- Water Filters
- Rear Gas Connection (RGT)

SECT. III PAGE 3  
0707

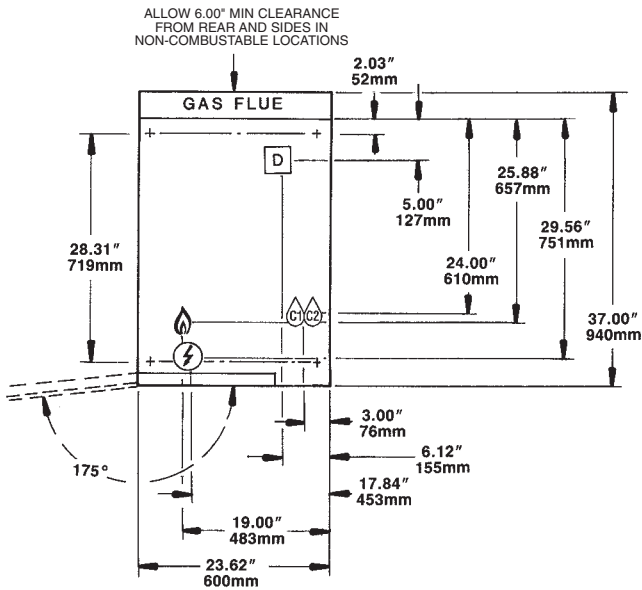

Each compartment has capacity for:


- Three, 12" x 20" x 2½" or six, 12" x 20" x 1" deep Cafeteria Pans.

**WATER QUALITY REQUIREMENT**

The recommended minimum water quality standards whether untreated or pre-treated, based upon 10 hours of use per day, and a Daily Blowdown, are as follows:

TOTAL DISSOLVED SOLIDS	less than 60 parts per million
TOTAL ALKALINITY	less than 20 parts per million
SILICA	less than 13 parts per million
pH FACTOR	greater than 7.5
CHLORINE	less than 30 parts per million

Consult a local water treatment specialist for an on site water analysis for recommendations concerning steam generator feed water treatment (if required), in order to remove or reduce harmful concentrations of minerals. The use of highly mineralized water will mean that more frequent servicing of the steam generator will be necessary. The fact that a water supply is potable is not proof that it will be suitable for the generator.

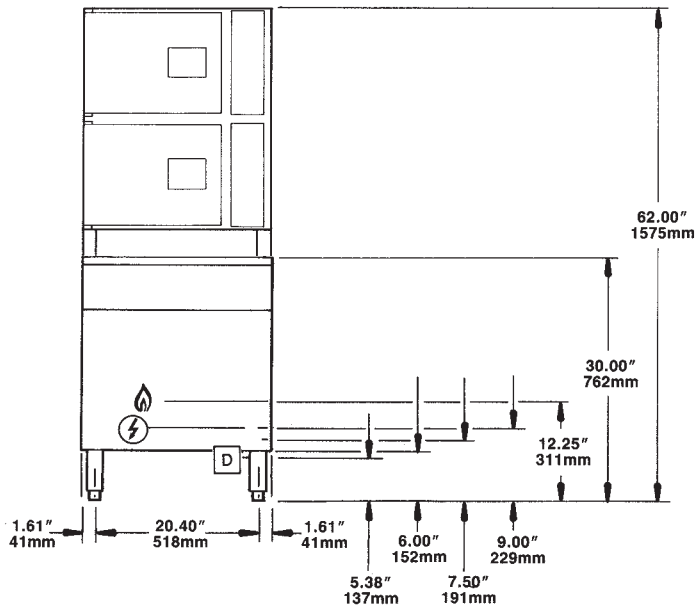

**NOTE:** When ordering optional reverse door openings: Control Panel, door openings, cooking compartments and clearances are opposite that shown.

GAS 🔥		ELECTRIC ⚡	WATER 💧💧	DRAINAGE 🗑️	CLEARANCE
NATURAL	PROPANE	115V - 1 PH	¼" NPT Cold Water Inlet	<b>The Floor Drain must be located outside the confines of the equipment base.</b>	Right - 6", Left - 6", Rear - 6" (12" on control side if adjoining wall or equipment is over 30" high for service access)
¾" IPS for 220,000 BTU or less. 1.00" IPS for 250,000 BTU or more.	¾" IPS for 220,000 BTU or less. 1.00" IPS for 250,000 BTU or more.	25 watts per compartment.	35 psi minimum 60 psi maximum	1 1/2" NPT common drain. Do not connect other units to this drain. Do not use PVC pipe for drain.	<b>For use in non-combustible locations. Contact factory for variances to clearances.</b>
Supply pressure: 4.00" W.C. minimum 14.00" W.C. maximum	Supply pressure: 12.00" W.C. minimum 14.00" W.C. maximum	50 watts for Steam Generator Control. 5.0 Amps	💧 Condenser feed 💧 Boiler feed		
Manufacturer must be notified if unit will be used above 2,000 ft. altitude.					

**NOTES:**

Cleveland Range reserves right of design improvement or modification, as warranted.  
Many regional, state and local codes exist and it is the responsibility of the owner and installer to comply with the codes.  
Cleveland Range equipment is built to comply with applicable standards for manufacturers. Included among those approval agencies are ASME/N. Bd, UL, NSF and CSA (AGA, CGA).

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>