

Dual Monitor Solutions



A Clear View to Productivity


DoubleSight provides an economic, easy-to-use Dual Monitor Solution for displaying as much data as a single 30 inch Wide LCD monitor. Users can view multiple programs simultaneously instead of toggling between programs or document windows. Multiple monitors will increase productivity and accuracy by allowing users access to multiple information sources concurrently.

DoubleSight offers a choice in Dual Monitor Solutions. Choose between our Standard 4:3 Monitors or Wide Screen (16:10) Monitors. All Dual Solutions feature the DoubleSight Flex Stand which includes Height, Tilt, Pivot and Swivel adjustments for a completely custom fit.

Key Features:

- Standard 4:3 and Wide Screen Models are available
- Preassembled for Fast, Hassle Free Installation
- Everything You need in One Box
- Stands are adjustable for Height, Tilt, Swivel and Pivot

Dual Monitors Adjustable View

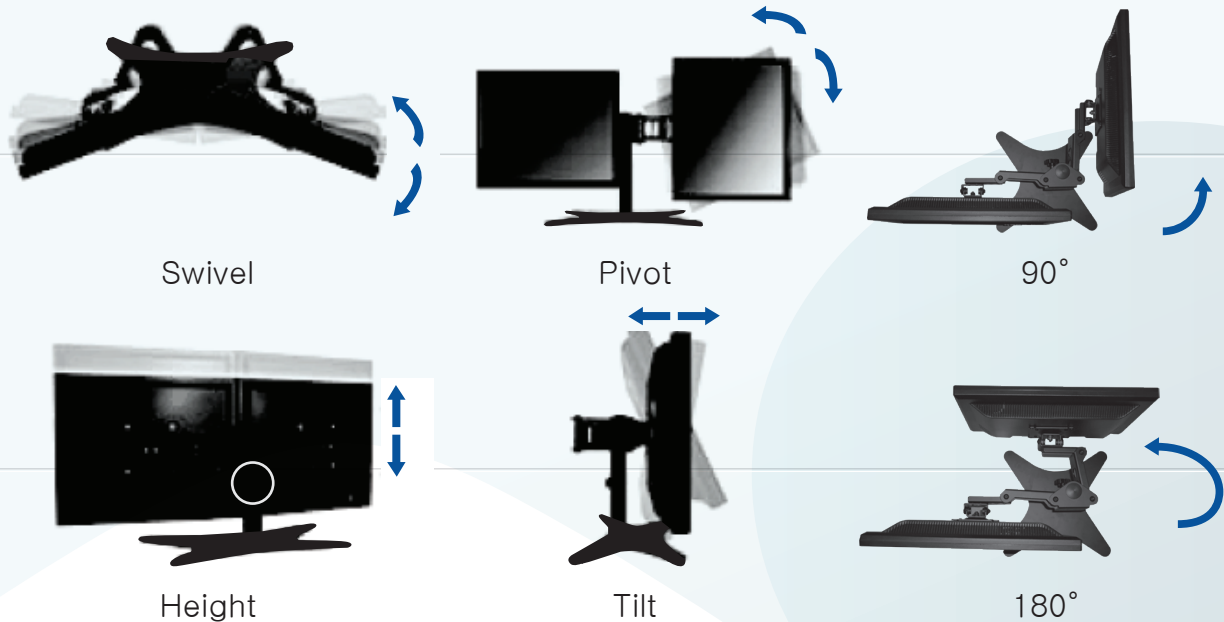

	Model Name	DS-1900SA	DS-1900WA	DS-2200WA
LCD	Panel Type	Dual 19" TFT LCD (4:3)	Dual 19" TFT Wide LCD (16:10)	Dual 22" TFT Wide LCD (16:9)
	Visible Screen Area	19" each monitor	19" each monitor	21.5" each monitor
	Pixel Pitch	0.294 (H) x 0.294 (W)	0.2835 (H) x 0.2835 (W)	0.248mm
	Max. Visible Angle	135° / 150°	160° / 160°	170° / 160°
	Displayed Color	16.7M	16.7M (True 8-bit Colors)	16.7M
	Response Time	8 msec	5ms	5ms
	Brightness	300 cd/m ²	300 cd/m ²	250 cd/m ²
	Contrast Ratio	700:1	1000:1	10000:1
	Recommended Resolution	1280 x 1024 (60Hz)	1440 x 900	1920 x 1080
MONITOR STAND	Dual Monitor Stand	Adjustable Height, Tilt, Pivot & Swivel	Adjustable Height, Tilt, Pivot & Swivel	Adjustable Height, Tilt, Pivot & Swivel
VIDEO SIGNAL	Horizontal Frequency	31 KHz ~ 81 KHz	30 KHz ~ 80 KHz	30 KHz ~ 80 KHz
	Vertical Frequency	56 KHz ~ 75 KHz	56 KHz ~ 75 KHz	55 KHz ~ 75 KHz
POWER	AC (Adapter)	110V ~ 240D, 50Hz	110V ~ 240D, 50Hz ~ 60Hz	110V ~ 240D, 50Hz ~ 60Hz
	DC (Monitor)	(12V, 3.5A) x 2		
	Power Consumption	Max. 70W, Power Save Mode 3W	Max. 80W, Power Save Mode 3W	≤50W
OTHER	Characteristics	Graphic OSD, Auto Adjustment	Graphic OSD, Auto Adjustment	Graphic OSD, Auto Adjustment
	Dimensions (W x H x D)	33"(W) x 19"(H) x 10"(D)	35"(W) x 19"(H) x 14"(D)	40"(W) x 22"(H) x 14"(D)
	Weight	30 lbs (Monitors & Stand)	32 lbs	28 lbs
	Certification	FCC, UL	FCC, UL	FCC, UL
	Warranty	3 year limited warranty, parts & labor	3 year limited warranty, parts & labor	3 year limited warranty, parts & labor
PACKAGE CONTENTS		(2) 19" LCD Displays (4:3)	(2) 19" LCD Displays (16:10)	(1) 22" LCD Displays (16:9)
		(1) Dual Monitor Stand	(1) Dual Monitor Stand	(1) Single Monitor Stand
		(2) RGB Monitor Cables	(2) RGB Monitor Cables	(2) DVI Monitor Cables
		(2) DVI Monitor Cables	(2) DVI Monitor Cables	(2) DVI to VGA Monitor Cables
		(2) Power Supplies	(2) Power Cables	(2) Power Cables
		Quick Installation Guide	Quick Installation Guide	Quick Installation Guide
		User's Manual	User's Manual	User's Manual

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>