




## ImagePro 8077A Portable LCD Projector

- 2500 Lumens Brightness
- SVGA Resolution
- 500:1 Contrast Ratio
- Auto Brightness Control
- Monitor Loopthrough
- RS232 for Control and USB for Remote Mouse Capability

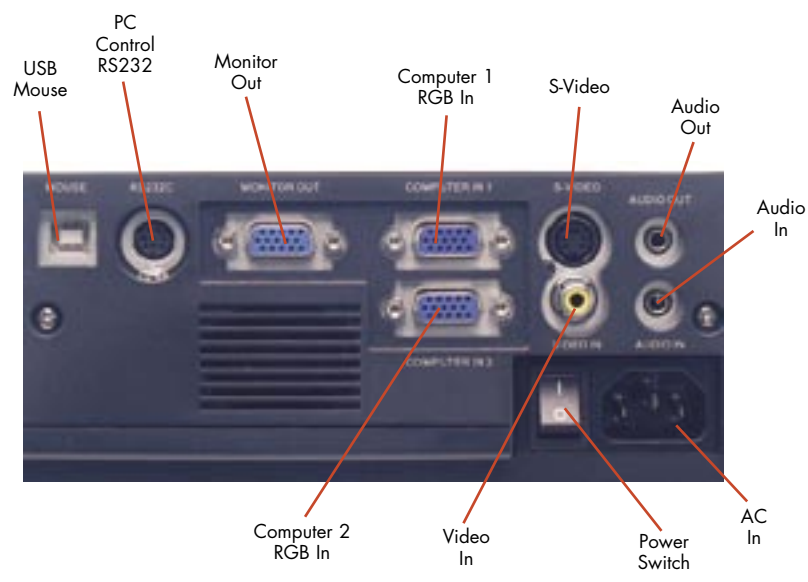

# 8077A DUKANE

# ImagePro 8077A Super Bright LCD projector

The Dukane ImagePro 8077A is an outstanding value projector for your classroom or conference room.

Control make this projector fast and easy to set up. Other special features are 3D noise reduction and a new long life dust prevention filter.



## Key features:

- SVGA (800 x 600) Resolution
- 2500 ANSI Lumens of Brightness
- 500:1 Contrast Ratio
- Easy Carry, 6 lbs.
- Flexibility with 2 Computer and 2 Video inputs
- Auto Brightness Control
- Monitor Loophrough
- RS232 for Control and USB for Remote Mouse Capability
- Two Year Warranty and One Year Peace of Mind Service

## 8077A Projection Table

Image Size 4:3		Throw Distance	
Diagonal	Width	Min.	Max.
Inches	Inches	Feet	Feet
30	24	3.0	3.5
40	32	4.0	4.7
50	40	5.0	5.8
60	48	6.0	7.0
80	64	8.0	9.3
100	80	10.0	11.7
200	160	20.0	23.3
300	240	30.0	35.0

Throw Ratio (distance to width) 1.5 1.75

# DUKANE

Dukane Corporation  
Audio Visual Products Division  
2900 Dukane Drive  
St. Charles, Illinois 60174  
800-676-2485  
630-584-5156  
avsales@dukcorp.com  
www.dukcorp.com/av

toll-free  
fax  
e-mail



ImagePro is a registered trademark of Dukane Corporation  
#070033

## Specifications

Image Element	0.63" polysilicon TFT x3, MLA
Brightness	2500 ANSI lumens 2000 (whisper mode)
Resolution	800 x 600 (H x V), SVGA
Contrast	500:1
Scanning Frequency	fh 15-69 kHz, fv 43-85 Hz
Lens	Manual zoom and focus (F=1.8 to 2.1), 1.2X, FL = 26.5 to 31.5 mm
Lens Throw Ratio	1.5 -1.75 :1 throw distance to image width
Keystone Correction	Digital, vertical +/-30 deg
Aspect Ratio	4:3, 16:9 selectable
Computer Compatibility	VGA, SVGA, XGA SXGA compressed, MAC
Video Compatibility	NTSC, NTSC 4.43, PAL, PAL-M, PAL-N, SECAM, HDTV 1080i, 720p, 480i/p
Image Control	Freeze function, electronic magnification and pan
Mouse Control	Using USB
Projection Modes	Front/rear/ceiling
Color Reproduction	24 bit (16.7 million)
Lamp	205W
Lamp Life	2000 hours (3000 in whisper mode)
Audio	2W x 1
Throw Distance	60" to 445"
Screen Size, diagonal	30" to 300"
Inputs, Video	(1) Composite video, RCA x 1 (line level) (1) S-video, Min DIN 4-pin, (2) RGB Signal: D-sub, 15 pin
Inputs, Computer	Audio, Stereo mini-jack x 1 15 pin, D-sub
Outputs Monitor	Audio, Stereo mini jack x 1
Outputs Audio	9 pin D-sub Connector, RS232C during operation
Outputs, Control	USB connector x 1
Security	Kensington lock slot
Fan Level	37dB, (33dB in whisper mode)
Operating Temperature	41 to 95 deg. F (5-35 deg C)
Power	AC 100-120V, AC220-240V, 50/60 Hz, 250W (normal), 232W (whisper), >5W (standby)
Size (WxHxD)	12" x 4" x 10.5"
Weight	6 lbs.
Carton Size	18" x 9" x 14"
Shipping Weight	16 lbs.
Accessories Included	Remote control, battery, power cord, VGA cable, User Manual, CD ROM, and Soft Carry Case
Safety	UL, cUL, FCC, CE, CB, CCC
Optional Accessories	Lamp 456-8077A Wireless Extender, LV3500W Ceiling mount, universal; RPA-U, Remote Control w/mouse function.

Two (2) year limited warranty on parts and labor in North America,  
lamp excluded (for other locations, local warranties apply). Includes  
Dukane's FREE 1 year Peace-of-Mind Loaner Program.

# 2YR

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>