


Nominal Voltage:	8.4 V
Rated Capacity:	1,500 mAh at 1,300 ohm to 6.0 V at 21°C (70°F)
Nominal Internal Impedance:	12 ohm @ 1kHz
Average Weight:	34.03 gm
Volume:	17.86 cm ³
Terminals:	Snap
Operating Temperature Range:	0°C to 50°C (32°F to 122°F)
ANSI:	7004 Z
IEC:	-

Typical Discharge Characteristics at 21°C (70°F)

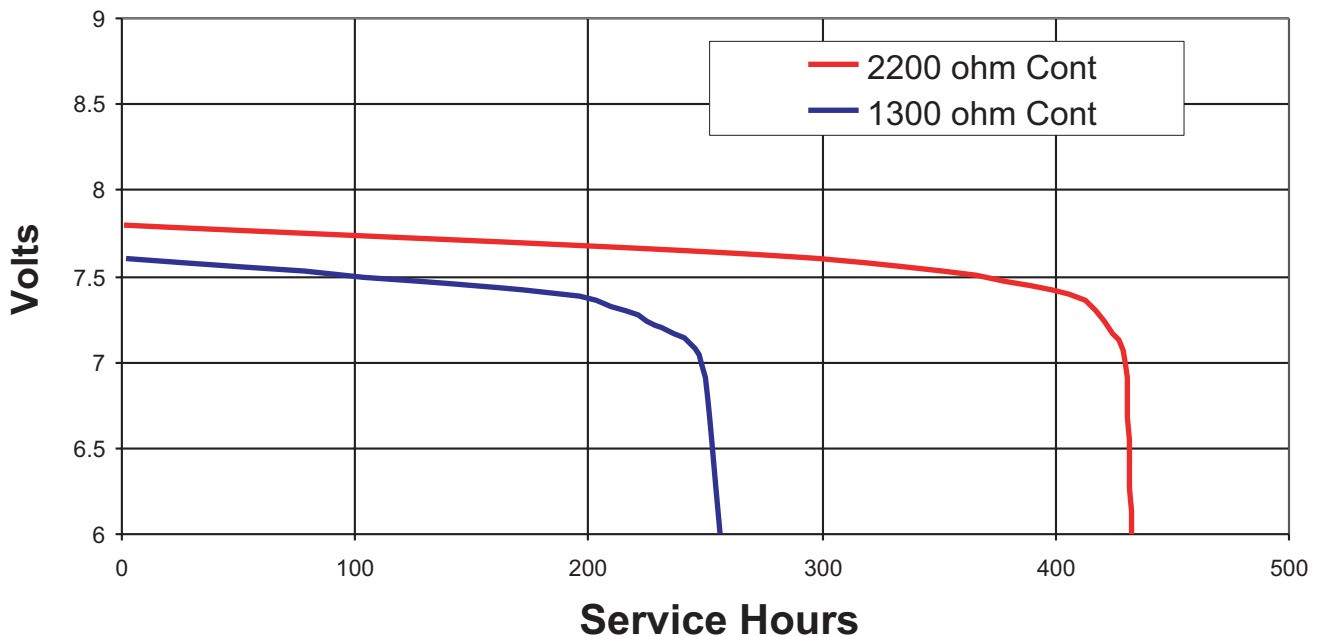

DURACELL®
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.

Internet: www.duracell.com
Telephone: Toll-free 1-800-544-5454

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>