


DAY & NIGHT COLOR CAMERA

MODEL # CC5301



Camera Features:

- SONY 1/3" Super HAD Color CCD
- Resolution Horizontal 480 TV Lines
- Auto UV Filter
- Super Low Light Sensitivity
Color : 0.5Lux, B/W : 0.03 Lux
- DC/Video/ESC IRIS Mode
- On Screen Display
- Motion Detection
- Remote Control Ready VIA RS-232C
- AC24V/DC12V Dual Power Source

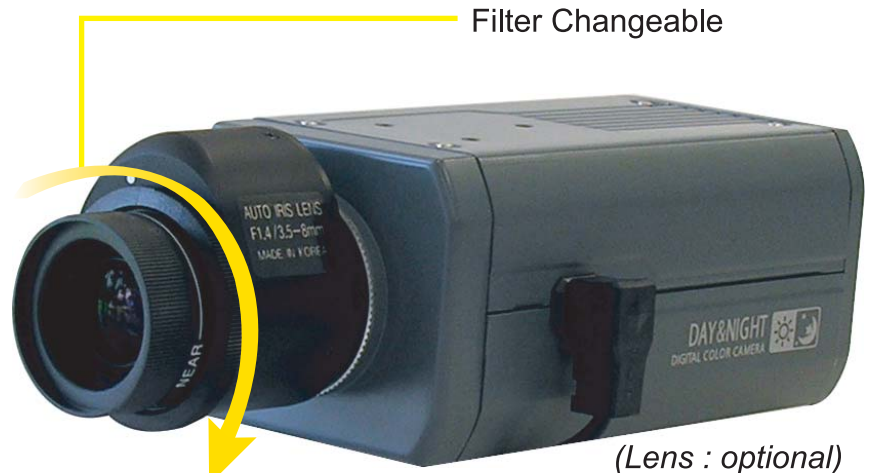

• Installing C/CS Mount Lens

Before mounting a lens, please check whether it is a C-mount or CS-mount lens. The back focus for the CS-mount lens at the factory.

• Mounting a CS-Mount Lens

After removing the protecting cap, attach the lens onto the camera by turning it clockwise.




WAREHOUSE



GROCERY



STORE

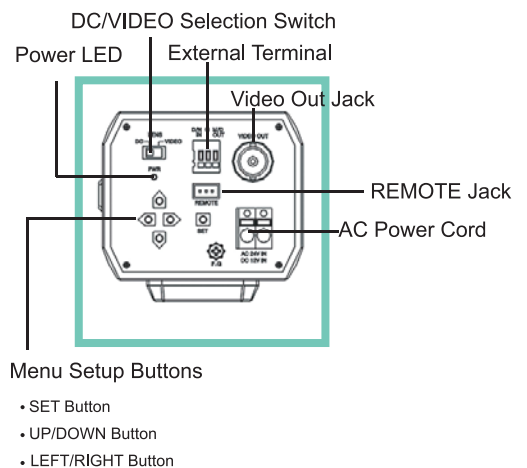

CLOVER
ELECTRONICS USA

www.cloverusa.com


T: 562-282-5700

F: 562-282-5800


877-327-5000 (Toll Free)

13073 E. 166th St. Cerritos, CA 90703

Day & Night Color Camera

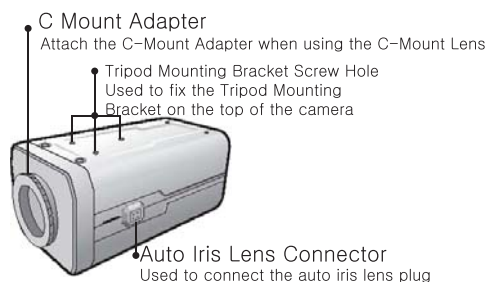


Front View

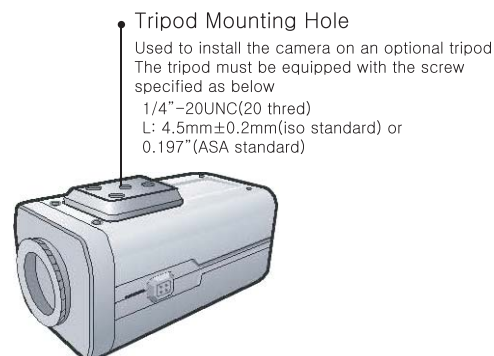

Bottom View

You can remove and install this bracket on the top or bottom of the camera. You must use the supplied screws or equivalent (within 4mm). If not, the bracket may not be fixed properly.

DIMENSIONS:

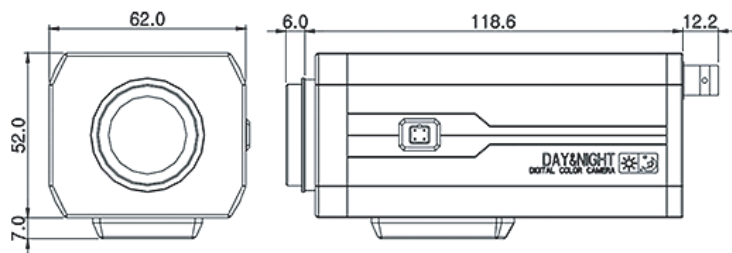

SPECIFICATIONS:

	NTSC	PAL
Image Sensor	1/3" SONY SUPER HAD IT CCD	1/3" SONY SUPER HAD IT CCD
Picture Elements	811(H)x508(V)	795(H) 596(V)
Effective Pixels	768(H)x494(V)	752(H) 582(V)
Scanning System	2:1 Interlace(NTSC Standard)	2:1 Interlace(PAL Standard)
Resolution	525 Line / 60Fields / 30Frames	625 Line / 50Fields / 25Frames
Shutter Speed	480(Color) / 520(BW)	TV Lines Horizontally
S/N Ratio	1/60~1/10,000sec	1/50~1/10,000sec
Video Output	More than 48dB (AGC OFF)	1.0 Vp-p PAL composite
Min. Illumination	1.0 Vp-p NTSC composite	0.5Lux at F1.2(Color)
	0.5Lux at F1.2(Color)	0.01Lux at F1.2(B/W)
	0.03Lux at F1.2(B/W)	
Sync. System	Internal / Line Lock selectable	
Back Light	ON/OFF selectable	
Iris Mode	DC Iris / Video Iris / ESC selectable	
White Balance	ATW / AWC / MANUAL selectable	
Lens Mount	CS-mount(or C-mount with the supplied adaptor)	
Color	AUTO / ON / BW / EXT.selectable	
O.S.D	Built-in	
RS-232C comm.	Available	
Power Supply	AC 24V, 60Hz / DC 12V (Non Polarity)	
Power Consumption	MAX. 4.0watt.	
Operating Temperature	-10 ~ +50	
Operating Humidity	90% RH Max.	
Dimension	62(W) 52(H) 133(L)mm (Without Lens)	



For More Information,
Call Toll Free 877-327-5000

www.cloverusa.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>