
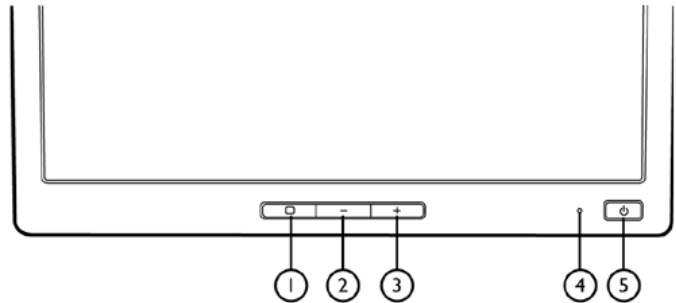


Overview

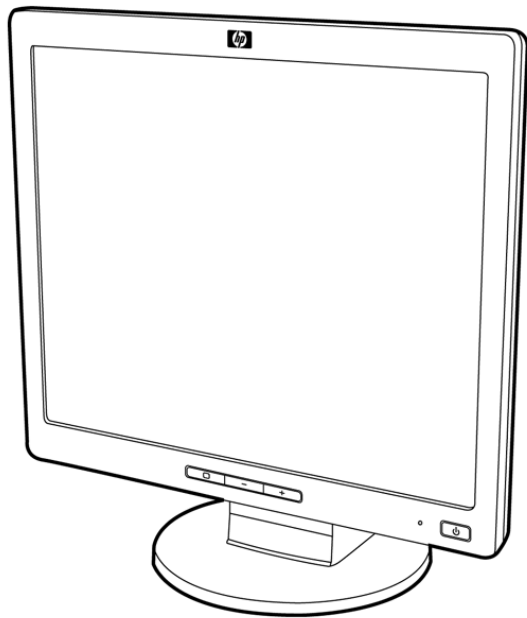

1. Button 1: Menu selection
2. Button 2: Menu "-" selector button
3. Button 3: Menu "+" selector button
4. Button 4: Power LED
5. Button 5: Power button

Models

PX850AA#ABA

HP Care Pack Services

4 Year Next Business Day Warranty Extension

U7934E

5 Year Next Business Day Warranty Extension

U7935E

Technical Specifications

Panel	Type	19-inch Active Matrix TFT (thin film transistor)	
	Viewable Image Area (diagonal)	19 in (48.26 cm)	
	Screen Opening (W x H)	14.8 x 11.9 in (37.6 x 30.1 cm)	
	Viewing Angle (typical)*	140 degrees horizontal/130 degrees vertical (10:1 minimum contrast ratio)	
	Brightness (typical)*	250 nits (cd/m ²)	
	Contrast Ratio (typical)*	500:1	
	Response Time	Up to 12 ms	
	Pixel Pitch	0.294 mm	
	Color Depth Support	> 16 million colors	
	*NOTE: All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.		
On Screen Display (OSD) Controls	Buttons or Switches	3-button OSD (menu, minus, plus); power on/off	
	Languages	English, French, German, Spanish, Italian, Dutch, Simplified Chinese	
	User Controls		Image Control (auto, horizontal, vertical)
			Positioning (vertical and horizontal)
			Color Temperature (6500k, 9300k, Custom)
		Brightness	
		Contrast	
		Clock, Clock Phase	
		Monitor Management (power saver, sleep)	
		Factory Reset	
Signal Interface/ Performance	Horizontal Frequency	30 to 83 kHz	
	Vertical Frequency	50 to 76 Hz	
	Graphics Controller	Genesis, MStar	
	Native Resolution	1280 x 1024 @ 60 Hz (recommended)	
	Maximum Resolution (Digital)	N/A	
	Preset VESA Graphic Modes (non-interlaced)		1280 x 1024 @ 60 Hz and 75 Hz
			1024 x 768 @ 60 Hz, 70 Hz, and 75 Hz
			1152 x 870 @ 75 Hz (Mac)
			1152 x 900 @ 76 Hz (Sun)
			832 x 624 @ 75 Hz (Mac)
			800 x 600 @ 60 Hz, 72 Hz, and 75 Hz
			720 x 400 @ 70 Hz
			640 x 480 @ 60 Hz, 72 Hz, and 75 Hz
Maximum Pixel Clock Speed	140 MHz		
User Programmable Modes	Yes, 10		
Anti-Glare	Yes		
Anti-Static	Yes		

Technical Specifications

	Default Color Temperature	6500 degrees Kelvin	
Video Input	Plug and Play	Yes	
	Input Signal	15 pin D-sub (Analog VGA)	
	Input Impedance	75 ohms (2 % value change allowed)	
	Sync Input	TTL separate synch	
	Video Cable	Detachable 15-pin D-sub mini connector	
	Video Cable Length	70.8 in (1.8 m)	
Power	Input Power	100 ~ 240 VAC	
	Nominal Current	< 0.50 Ampere	
	Frequency	50 ~ 60 Hz	
	Typical Power Consumption	33 watts	
	Maximum	< 37 watts	
	Power Saving	< 2 watts	
	Power Cable Length	74.8 in (1.9 m); detachable	
Mechanical	Dimensions (H x W x D)	Unpacked with stand	16.8 x 16.6 x 8.0 in (42.7 x 42.2 x 20.3 cm)
		Display Head only	14.3 x 16.6 x 2.3 in (36.2 x 42.2 x 5.9 cm)
		Packaged	19.1 x 19.4 x 6.9 in (48.4 x 49.2 x 17.6 cm)
	Weight	Unpacked	11.7 lb (5.3 kg)
		Packaged	15.4 lb (7.0 kg)
	Tilt Range	-5 to +30 degrees vertical tilt	
	Swivel Range	None	
	Height Adjustable	No	
	Pivot Rotation	No	
	Base and Stand	Detachable	
Environmental	Temperature – Operating	50° to 95° F (10° to 35° C) non-condensing	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 90%	
	Altitude – Operating	0 to 12,000 ft (0 to 3,658 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,100 m)	
	Options	HP Flat Panel Speaker Bar – Part number: EE418AA	Powered directly by the monitor, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.
HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B		Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 or dc7600 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document.	

Technical Specifications

Other	Accessories Included	Detachable VGA cable, detachable AC power cord, documentation kit, and user CD.
	Software	HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, Brazilian Portuguese, French, LA Spanish, Korean, Simplified Chinese, Traditional Chinese, Japanese, Danish, Dutch, Finnish, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	Americas English, Canadian French LA Spanish, Brazilian Portuguese EMEA English, Danish, Dutch, Finnish, European French, German, Italian, Norwegian, Castilian Spanish, Swedish Asia/Pacific English, Bahasa, S. Chinese, T. Chinese, Korean, Japanese, Chinese
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance		9241-3,7,8 VDT guidelines, ISO 13406-2 pixel defect guidelines, MPR-II, CISPR, VCCI, CSA (Canada), ACA (Australia), TUV and GS Mark (German ergonomic), BSMI (Taiwan), CCC (China), MIC (South Korea), NOM (Mexico), Eastern European approvals, CE Marking, FCC approval, Energy Star, TCO '03 (emissions, ergonomics, environment), Microsoft® Windows® certified (Microsoft® Windows® 2000 and Microsoft Windows XP), UL listed, GOST (Russia), SASO (Saudi Arabia)
Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty		Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details. For details, contact HP Customer Support.

© 2005 Hewlett-Packard Development Company, L.P.

Microsoft and Windows are trademarks or registered trademarks of Microsoft Corporation in the U.S. and other countries.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>