

# MCGRAW-EDISON®



## ZD CREDENZA

26 - 57 W

Compact Fluorescent

70 - 1000 W

Metal Halide

High Pressure Sodium

ARCHITECTURAL  
AREA LUMINAIRE



In Solid Top Configurations only.

- Spun-aluminum top is finished in premium TGIC polyester powder coat
- Long life core-and-coil HID ballast
- Controlled and fully rotatable optics offer ten (10) distinct beam patterns. Precision hydroformed or premium segmented optical modules available
- Heavy-duty, die-cast aluminum frame is the main load-bearing structure for arm, yoke or spider mountings
- Die-cast aluminum door frame has concealed hinges and is flush with the bottom of the housing
- Thermal shock- and impact-resistant clear tempered flat glass
- Porcelain screw-shell socket fits mogul-base HID lamps. Medium-base lamps are standard for formed optics 150W and below and segmented optics up to 175W
- U.L. listed for wet locations. CSA certified
- Approximate net weight: 64 lbs. (29 kgs.)

### DESCRIPTION

The Credenza series sets the standard in flexibility for architectural area lighting. The Credenza is available in three (3) sizes, so a single look can be carried through diverse areas of a project. Combined with three (3) mounting varieties, MH or HPS lamps, ten (10) optical packages and numerous colors, the Credenza offers unparalleled variety in one family of fixtures. U.L. listed and CSA certified for wet locations.

The Credenza offers features so versatile that it can be used in small areas such as walkways and large areas like parking lots, while maintaining a look of continuity throughout.

### ORDERING INFORMATION

SAMPLE NUMBER: ZDM-AM-400-MH-MT-5F-BK

Product Family	Mounting Method	Lamp Wattage <sup>4</sup>	Lamp Type	Voltage <sup>10</sup>	Distribution	Color <sup>13</sup>	Options & Accessories
ZDS=Credenza Small	AM=Arm Mount	70=70W	MH=Metal Halide	120=120V	1F=Type I Formed <sup>12</sup>	(add as suffix/ must specify)	(See Below)
ZDG=Credenza Small Luminous Top <sup>1</sup>	YM=Yoke Mount <sup>3</sup>	100=100W	HPS=High Pressure Sodium	208=208V	2F=Type II Formed	BK=Black	
ZDM=Credenza Medium Solid Top	SM=Spider Mount for 3" O.D. Tenon <sup>3</sup>	175=175W	CF=Compact Fluorescent <sup>8,9</sup>	240=240V	2S=Type II Segmented	BZ=Bronze	
ZDL=Credenza Large Solid Top <sup>2</sup>		250=250W		277=277V	3F=Type III Formed	AP=Grey	
		400=400W <sup>6</sup>		480=480V	3S=Type III Segmented	WH=White	
		1000=1000W <sup>7</sup>		MT=Multi-Tap <sup>11</sup>	4S=Type IV Segmented	DP=Dark Platinum	
		Compact Fluorescent		TT=Triple-Tap <sup>11</sup>	5F=Type V Formed	GM=Graphite Metallic	
		26=26W			5S=Type V Segmented		
		32=32W			FT=Forward Throw		
		42=42W			SL=Spill Light Eliminator <sup>6</sup>		
		57=57W					


E.P.A. ZDS & ZDG: Arm Mount 1.19, Spider & Yoke Mount 1.13 / ZDM: Arm Mount 1.70, Spider & Yoke Mount 1.52  
ZDL: Arm Mount 2.36, Spider & Yoke Mount 2.10

**Options<sup>14</sup>**  
 F=Single Fuse (120, 277 or 347V)  
 FF=Double Fused (208, 240 or 480V)  
 P=Button Type Photocontrol (Specify Voltage)  
 R=NEMA Twistlock Photocontrol Receptacle  
 HS=House-side Shield  
 VS=Vandal Shield<sup>15</sup>

**Accessories<sup>16</sup>**  
 OA/RA1016=NEMA Photocontrol/Multi-Tap—Multi-Tap  
 OA/RA1027=NEMA Photocontrol/Multi-Tap—480V  
 MA1001XX=Wall Bracket for Solid Top  
 MA1003XX=Wall Bracket for Luminous Top<sup>17</sup>

**NOTES:** 1 Segmented optics not available. Available in 120 or 277V only. 2 Segmented optics not available. 3 Requires 4" round straight pole for ZDS. 5" round straight pole for ZDG and ZDM. 6" round straight pole for ZDL. 4 All 70-150W lamps on formed optics and 70-175W lamps on small segmented optics are medium-base, 175-1000W are mogul-base. 5 150W HPS uses S-55 lamp (arc rating of 55V). 6 Must use reduced jacket ED-28 400W lamp when using a segmented optical system in the medium housing. 7 1000W HPS not available in medium housing. Medium housing requires BT-37 lamp for Metal Halide and only available with formed optics. 8 Available in Type III, IV and V distributions in small, solid top housing with segmented optics only. 9 Nominal length not to exceed 7". 10 Product also available in non-US voltages and 50Hz for international markets. Consult factory for availability and ordering information. 11 Multi-Tap ballast is 120/208/240/277V wired 277V. Triple-Tap ballast is 120/277/347V wired 347V. 12 Medium housing fixture only. 13 Other finish colors available, including a full line of RAL color matches. Consult your Cooper Lighting Representative. 14 Add as suffix in the order shown. 15 400W Maximum. 16 Order separately, replace XX with color suffix. 17 Not for use with 250W HPS. 18 Specifications and dimensions subject to change without notice.  
 Download from [www.somanuals.com](http://www.somanuals.com). All Manuals Search And Download.

### DIMENSIONS

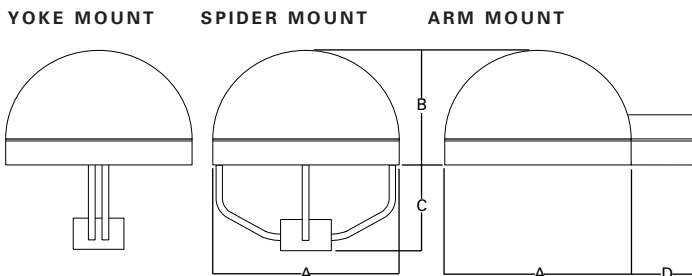

Fixture	A	B	C	D
ZDS-ZDG	20 1/2" [521mm]	10 1/4" [260mm]	11" [279mm]	6" [152mm]
ZDM	24" [610mm]	12 1/8" [308mm]	12 5/8" [321mm]	7 1/2" [191mm]
ZDL	28" [711mm]	14 1/4" [362mm]	16" [406mm]	9" [229mm]

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>