



VoIP Paging Gateway

The CyberData VoIP Paging Gateway enables access to existing paging speakers through a VoIP phone system. The interface is designed to use an existing analog zone controller with a TAM interface and supports paging up to 99 zones from a VoIP phone.



The gateway has an FXO port that connects to the FXS port on the zone controller.



Features

- SIP RFC 3261 compatible
- Dual speed 10/100 Mbps
- Configurable DTMF tones to Zone Controller
- Web-based configuration
- Web-based firmware upgradeable
- Power-over-Ethernet (PoE 802.3af) enabled
- Connector for optional external power supply (not included)
- Small footprint
- IGMP

VoIP Paging Gateway Specifications	
Protocol	SIP RFC 3261 Compatible
Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3af or 48VDC
Payload Types	G711
Regulatory Compliance	FCC Class B, UL 60950, CE
Dimensions	6.11"L x 4.05"W x 1.15"H
Warranty	2 years limited
Part Number	010846



VoIP Paging Gateway

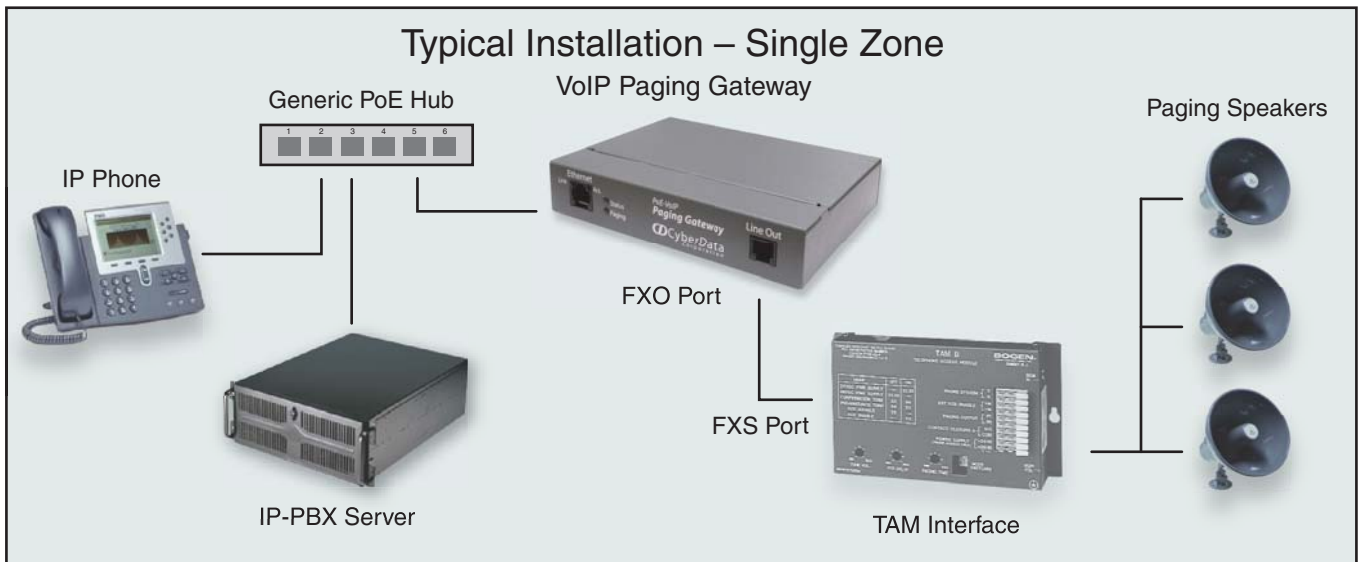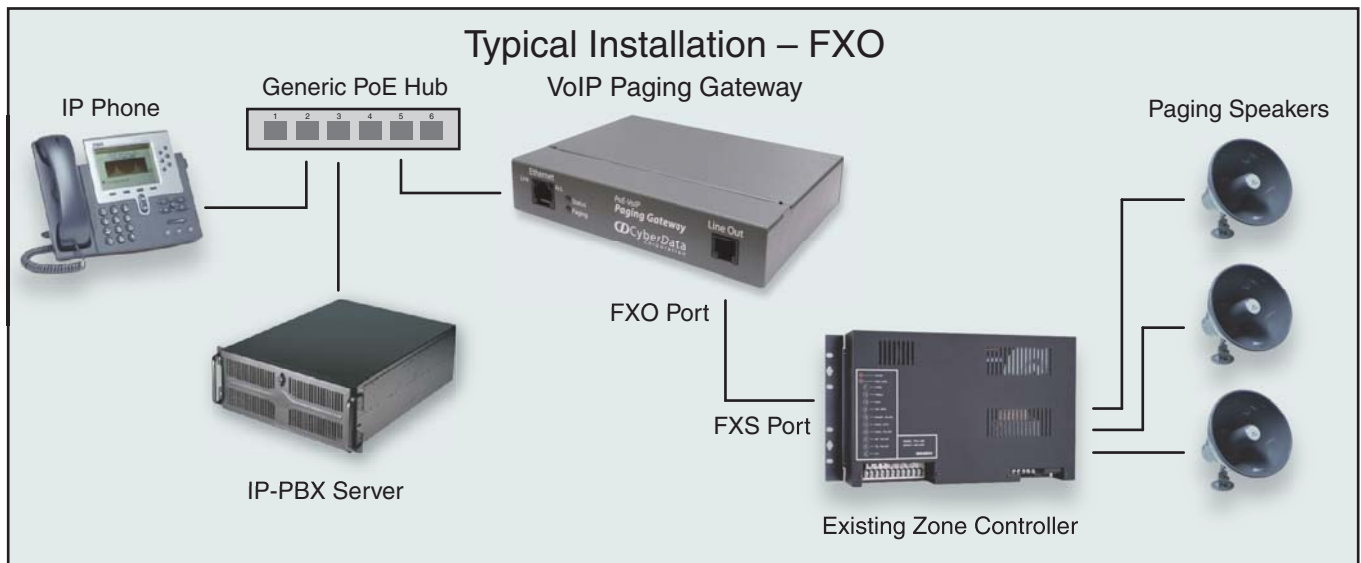

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>