



# ColdPro<sup>®</sup>

Self-Contained Solid Door Reach-In Freezer

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

ColdPro<sup>®</sup> Reach-In Freezers

## Model

- |   |                            |
|---|----------------------------|
| F1FR 1 section, full door, hinged right | F2FH 2 section, full doors |
| F1FL 1 section, full door, hinged left  | F2HH 2 section, half doors |
| F1HR 1 section, half door, hinged right | F3FH 3 section, full doors |
| F1HL 1 section, half door, hinged left  |                            |



F2HH

## Standard Features

- Ceiling mounted interior evaporator coil
- Bottom mounted condensing unit
- Hot gas condensate removal
- 6' attached cord and plug
- Exterior digital thermometer
- Stay open door
- No tools magnetic door gasket
- Epoxy coated shelves - 3 per section
- One piece formed interior door liner
- Full integral, vertical door handle
- Casters mounted from factory
- One year parts and labor warranty
- Additional 4 year compressor part warranty

## Options & Accessories

- 6" adjustable legs
- Additional epoxy coated shelves

## Specifications

**Exterior:** Cabinet exterior front, including door, is constructed of heavy gauge stainless steel. Exterior sides are gray coated heavy gauge steel. Back is aluminum.

**Interior:** Cabinet interior, including door liner is constructed of white coated, corrosion resistant aluminum. Interior floor is heavy gauge stainless steel. Radius corners are provided in the front, rear and at the floor. Three white epoxy coated shelves are supplied per full door section. Shelves rest on clips which are adjustable on 1" increments on pilasters affixed to the cabinet interior. Pilasters are removable without tools for cleaning. Interior light mounted to the side wall is controlled automatically through a switch mounted at the top of the door opening. Door openings have plastic breaker strips to retard condensate formation.

**Doors:** Exterior is heavy gauge stainless steel, interior liner is white coated aluminum and is formed to protrude past the gasket to provide protection. Door hinges are concealed within the door. Full vertical


length door handle is integrated into the door exterior. Keyed door lock is mounted in the top of the door and engages into a strike mounted at the top of the door opening. Door gaskets are magnetic and mount to the door, snapping into place and are removable without tools.

**Refrigeration system:** Evaporator coil is mounted to the interior ceiling. Condensing unit is located at the bottom of the cabinet, below the storage area. Environmentally friendly R404A refrigerant is used. System has the capability of maintaining between -5°F and 0°F in normal foodservice operational use. Refrigerant is metered using a capillary tube. Operation is controlled through an adjustable electromechanical thermostat located on the evaporator coil on the interior of the cabinet. Airflow discharges from the rear of the evaporator coil down the back wall. Return air is drawn into the evaporator coil from the front with the assist for fans. Condensate evaporation is automatic using hot gas from normal refrigeration system operation. Evaporator coil defrost is automatic using a mechanical time clock and electric heaters.

**Other:** Unit is supplied with a 6' cord and plug attached. 4" casters with an overall height of 5" are mounted on the unit from the factory.



# ColdPro® Reach-In Freezers

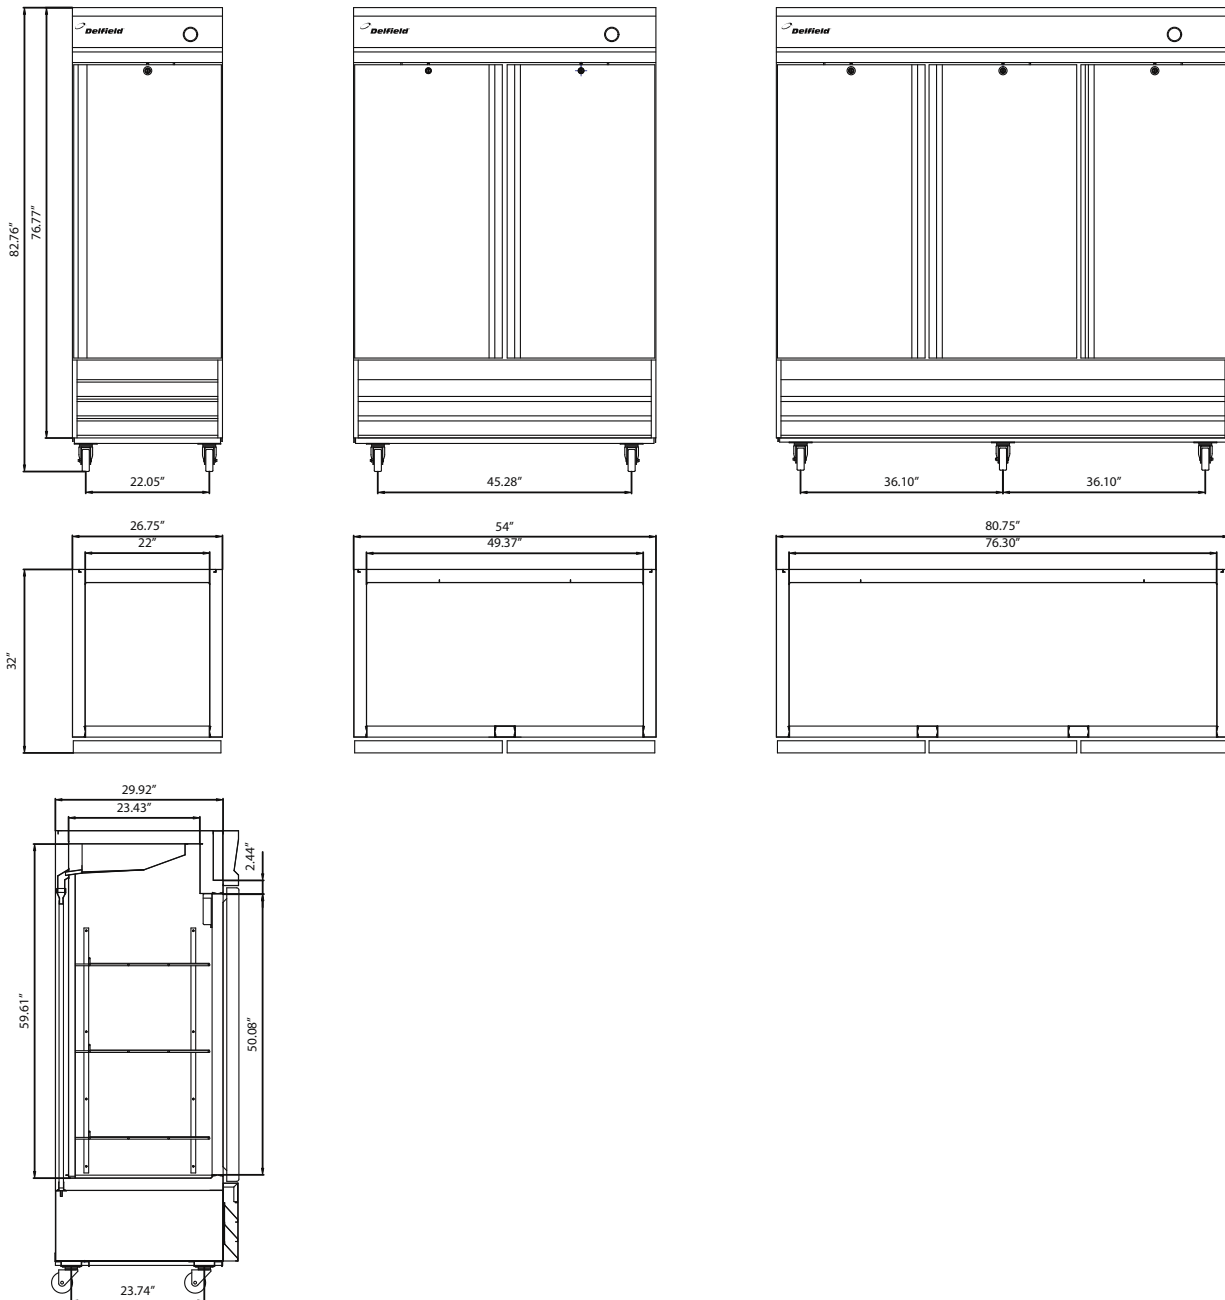

## ColdPro SOLID DOOR FREEZERS

MODEL #	VOLTAGE	AMPS	STORAGE CAPACITY FT <sup>3</sup>	SHELF CAPACITY FT <sup>2</sup>	H.P.	BTU	ESTIMATED ENERGY KWH	SHIP WEIGHT	NEMA PLUG
F1FR	115/60/1	9.0	19.4	14.04	1/2	2325	8.83	334 LBS	5-15P
F1FL	115/60/1	9.0	19.4	14.04	1/2	2325	8.83	334 LBS	5-15P
F1HR	115/60/1	9.0	19.4	14.04	1/2	2325	8.83	334 LBS	5-15P
F1HL	115/60/1	9.0	19.4	14.04	1/2	2325	8.83	334 LBS	5-15P
F2FH	115/60/1	10.0	43.0	28.08	3/4	3650	14.41	558 LBS	5-15P
F2HH	115/60/1	10.0	43.0	28.08	3/4	3650	14.41	558 LBS	5-15P
F3FH	115/60/1	16.0	66.9	42.12	1+	4500	19.52	766 LBS	5-20P

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>