

Igniter

IGT005 Type



Features

- Via 3 Vdc externally supplied from battery and the functioning of the trigger board, the high voltage coil is stimulated and results into 37 KVo-p to start up the ignition.

Applications

- Gas Igniter

Mechanical Dimension: Unit: mm

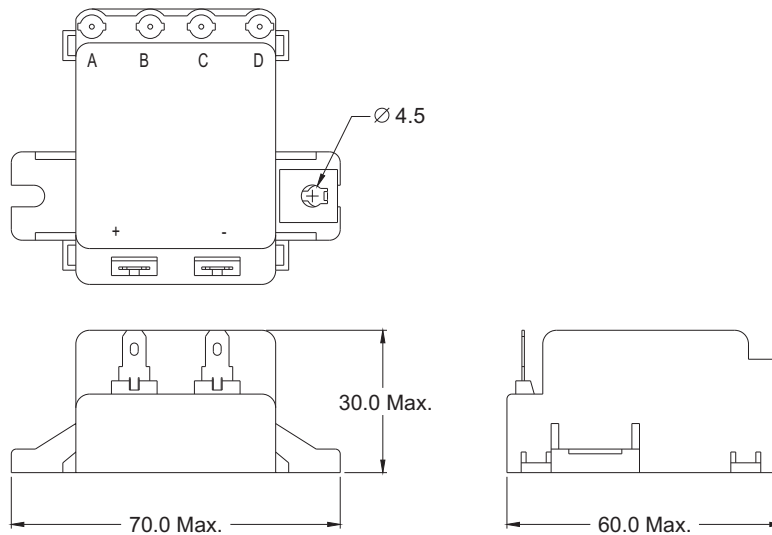


Electrical Characteristics:

- AT 25°C, 65%RH, INDUCTANCE TESTED@1KHz/1V

PART NO.	PRIMARY INDUCTANCE (μH)	SECONDARY INDUCTANCE (mH)	OUTPUT VOLTAGE (KVo-p)	WEIGHT
IGT-005	57.0±20%	360.0±20%	37.0±3.0	72g

- Input voltage: 3 Vdc
- Switching frequency: 5Hz Min.
- Operation temperature: -10C to +55C
- Storage temperature: -20C to +70C
- Insulated with epoxy resin

Recommended Circuit:

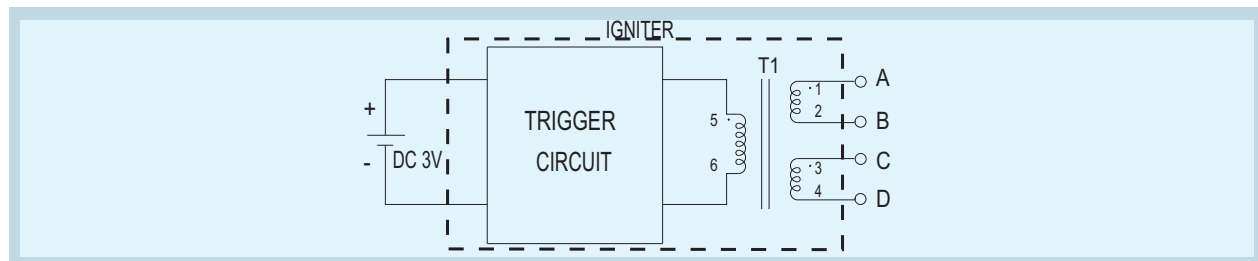

DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.
 TEL: 886-3-3591968; FAX: 886-3-3591991
<http://www.deltawww.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>