


SPECIFICATION

SIZE / TOOL		15S5			20S5			26S5			32S5		
MODEL		LT-15S5LF	LT-15S5TF	LT-15S5MF	LT-20S5LF	LT-20S5TF	LT-20S5MF	LT-26S5LFH	LT-26S5TFH	LT-26S5MFH	LT-32S5LFH	LT-32S5TFH	LT-32S5MFH
SYSTEM	PAL/SECAM*B/G, DK, I	●	●	—	●	●	—	●	●	—	●	●	—
	SECAM*LL'	●	—	—	●	—	—	●	—	—	●	—	—
	NTSC 3.58/4.43(AV)	●	●	●	●	●	●	●	●	●	●	●	●
	PAL NM	—	—	●	—	—	●	—	—	●	—	—	●
	NTSC M	—	●	●	—	●	●	—	●	●	—	●	●
PICTURE	Progressive Scan	●	●	●	●	●	●	●	●	●	●	●	●
	Skin Tone	—	—	—	—	—	—	—	—	—	—	—	—
	Black Strecher	—	—	—	—	—	—	—	—	—	●	●	●
	Digital Comb Filter	4H	4H	4H	4H	4H	4H	4H	4H	4H	4H	4H	4H
	*DCTV/DLTI	●	●	●	●	●	●	●	●	●	●	●	●
	Picture Enhancer	—	—	—	—	—	—	—	—	—	—	—	—
Picture Mode(Dynamic, Standard, Mid, Game, User)	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	
SOUND	Stereo / NICAM	●●	●●	USKOREA/JAPAN	●●	●●	USKOREA/JAPAN	●●	●●	USKOREA/JAPAN	●●	●●	USKOREA/JAPAN
	Sound Effect	surround	Surround	Surround	surround	Surround	Surround	surround	Surround	Surround	Surround	Surround	Surround
	AVL(Auto Volume Leveller)	●	●	●	●	●	●	●	●	●	●	●	●
	Equalizer	●	●	●	●	●	●	●	●	●	●	●	●
	Sound Output	3W x 2	3W x 2	3W x 2	3W x 2	3W x 2	3W x 2	10W x 2	10W x 2	10W x 2	10W x 2	10W x 2	10W x 2
	SoundMode (Flat, Music, Movie, Speech, User)	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode	5 Mode
TELETEXT	Page	10 page	10 page	—	10 page	10 page	—	1000 page	1000 page	—	1000 page	1000 page	—
	TOP/FLOF	●●	●●	—	●●	●●	—	●●	●●	—	●●	●●	—
	*WSS	—	—	—	—	—	—	—	—	—	—	—	—
CAPTION	Caption / Vchip	—	—	●●	—	—	●●	—	—	●●	—	—	●●
OSD	MENU/Half Tone	●	●	●	●	●	●	●	●	●	●	●	●
	Multi Language	●	●	●	●	●	●	●	●	●	●	●	●
	Program List / Edit	●●	●●	●/X	●●	●●	●/X	●●	●●	●/X	●●	●●	●/X
OTHERS	Double Window Text	●	●	—	●	●	—	—	—	—	—	—	—
	Double Window PIP	—	—	—	—	—	—	—	—	—	—	—	—
	PIP(AV/PC, RF/PC, AV/RF)/ POP	—	—	—	—	—	—	●●, X/●	●●, X/●	●●, X/●	●●, X/●	●●, X/●	●●, X/●
	Zoom Function	—	—	—	—	—	—	●	●	●	●	●	●
	ARC (Aspect Ratio Control)	—	—	—	—	—	—	●	●	●	●	●	●
	FM Radio	●	●	●	●	●	●	●	●	●	●	●	●
	Real Clock	●	●	●	●	●	●	●	●	●	●	●	●
DIGITAL APPLICATION	HD Ready	—	—	—	—	—	—	●	●	●	●	●	●
	DTV Tuner	—	—	—	—	—	—	—	—	—	—	—	—
INPUT	HDMI™ Input	—	—	—	—	—	—	●	●	●	●	●	●
	DVI Input	—	—	—	—	—	—	—	—	—	—	—	—
	Component 1 (Y/Pb/Pr)	—	480i/576i	480i-1080i	—	480i/576i	480i/576i	480i-1080i	480i-1080i	480i-1080i	480i-1080i	480i-1080i	480i-1080i
	Component 2 (Y/Pb/Pr)	—	—	—	—	—	—	480i-1080i	480i-1080i	—	480i-1080i	480i-1080i	—
	S-Video	●	●	●	●	●	●	●	●	●	●	●	●
	AV 1	Full SCART	PHONE	PHONE	Full SCART	PHONE	PHONE	Full SCART	PHONE	PHONE	Full SCART	PHONE	PHONE
	AV 2	—	—	—	PHONE	—	—	Half SCART	—	—	Half SCART	—	—
	AV 3	—	—	—	—	—	—	—	—	—	—	—	—
	Digital Sound(optical/Coaxial)	—	—	—	—	—	—	—	—	—	—	—	—
	D-SUB	●	●	●	—	—	—	●	●	●	●	●	●
PC Audio In	●	●	●	—	—	—	●	●	●	●	●	●	
OUTPUT	Digital Sound(Optical/Coaxial)	—	—	—	—	—	—	COAX	COAX	COAX	COAX	COAX	COAX
	AV Out	●	●	●	●	●	●	—	—	—	—	—	—
	Woofer	—	—	—	—	—	—	—	—	—	—	—	—
	Headphone	●	●	●	●	●	●	●	●	●	●	●	●
CONTROL	RS-232C	—	—	—	—	—	—	—	—	—	—	—	—
	RJ11 or RJ45	—	—	—	—	—	—	●	●	●	●	●	●
POWER	Power(Internal / Adapter)	Adapter(12V / 3.5A)			Adapter(15V)			Adapter(24V / 6.0A)			Internal(SMPS)		
	Power Consumption	45W			70W below			140 W			150W		
	Stand By Power Consumption	3W below			3W below			3W below			3W below		

*DCTV/DLTI : Digital Colour Transient Improvement
Digital Luminance Transient Improvement

*WSS : Wide Screen Signaling

Specifications and design are subject to change without notice. Reservation for misprint.

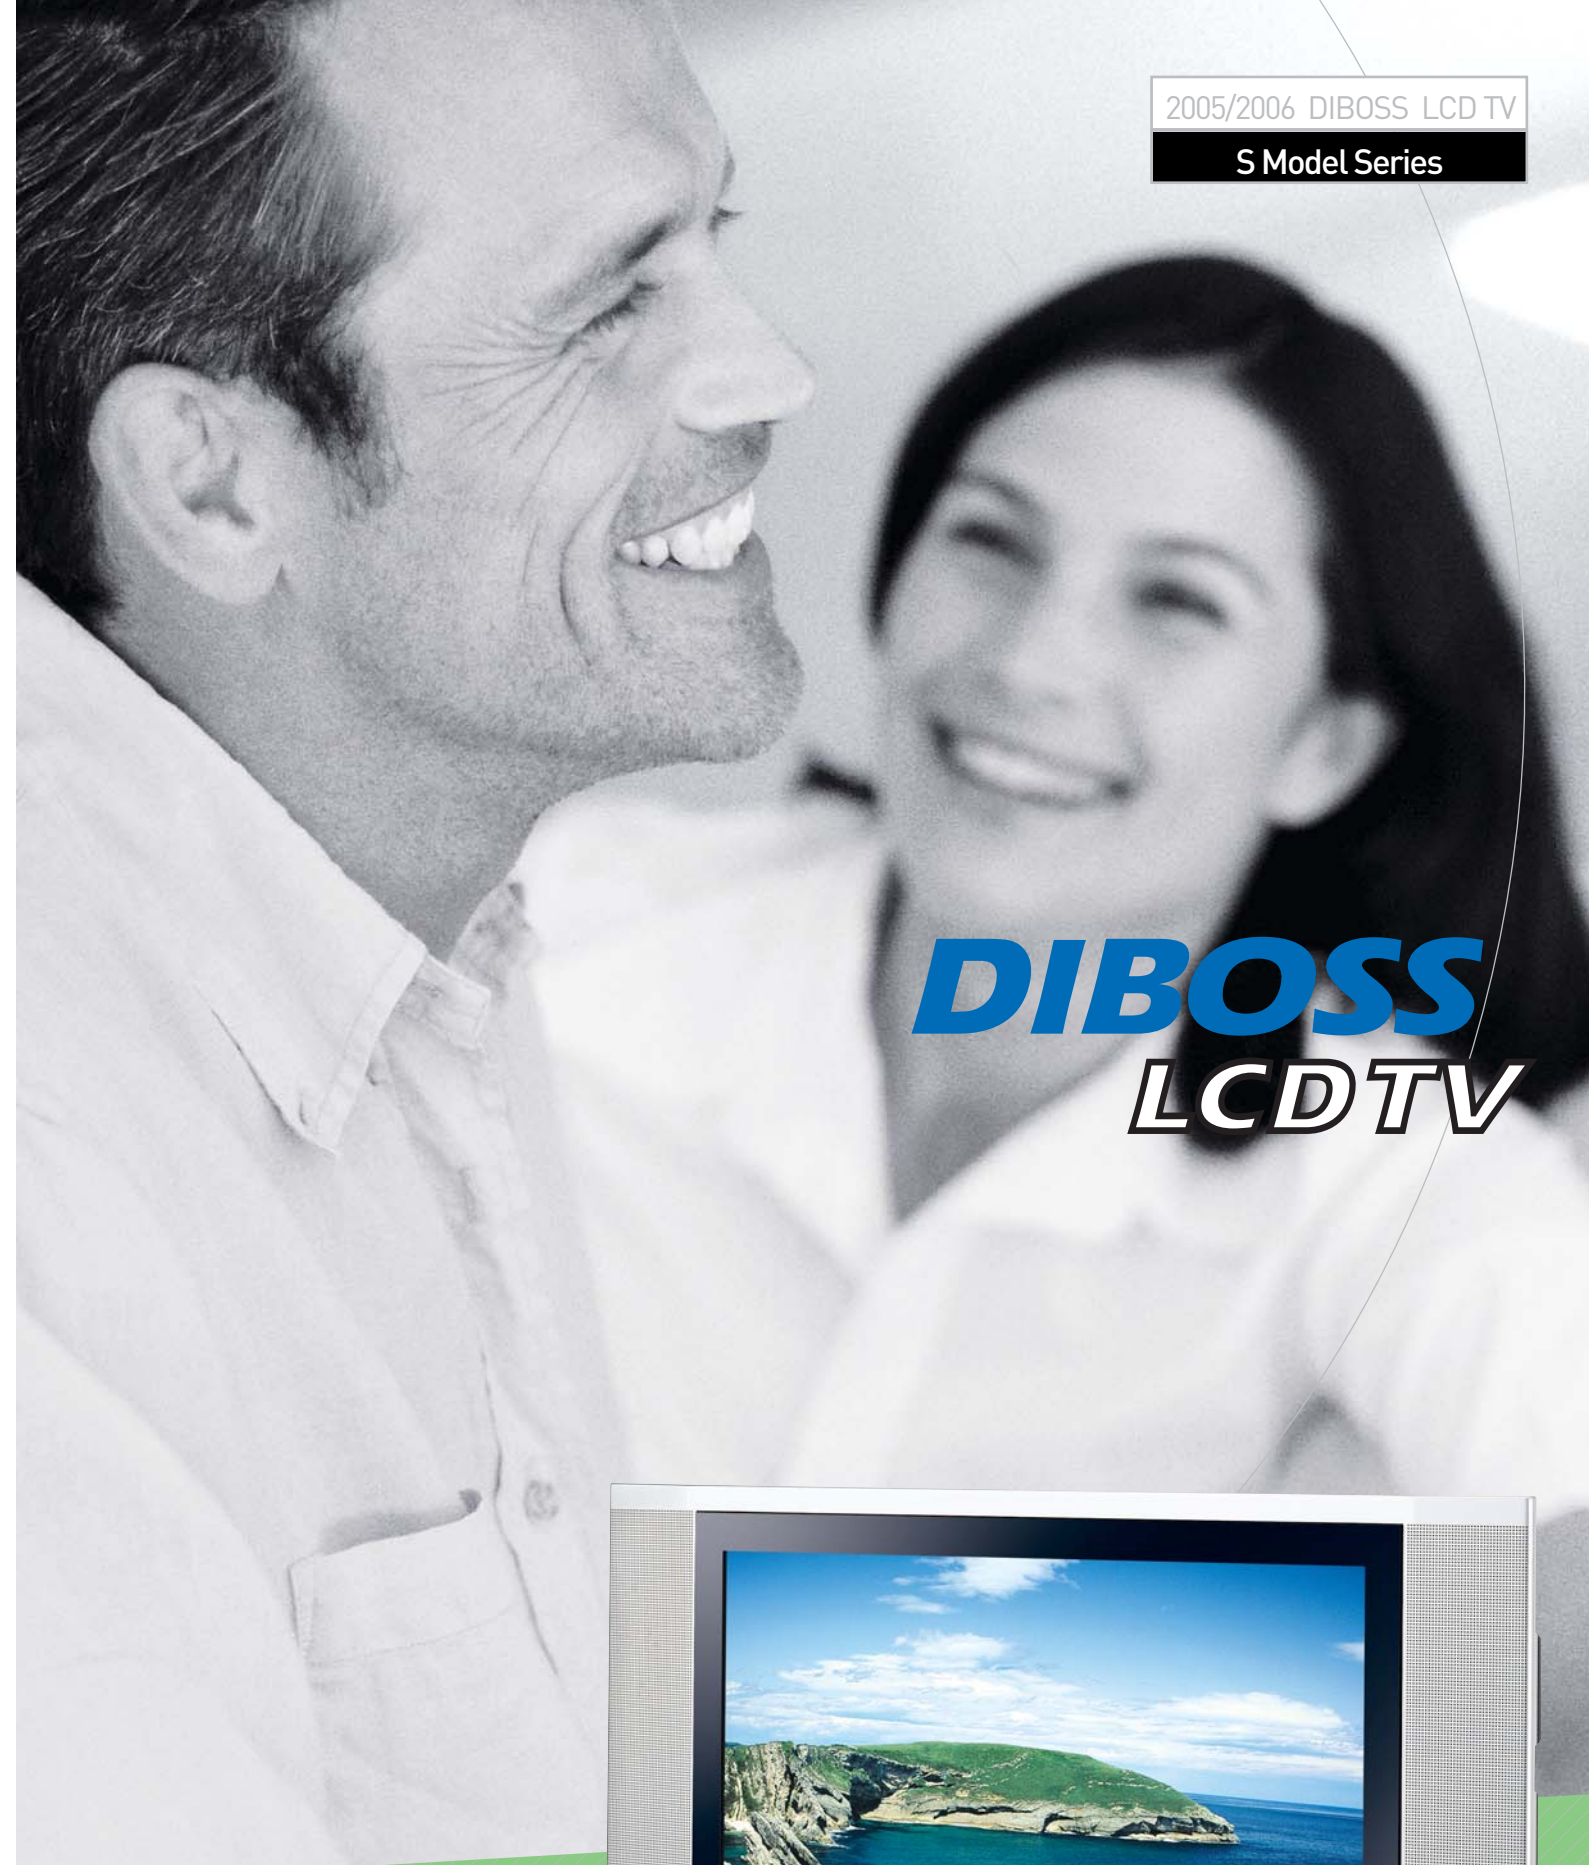

www.diboss.tv

Head Office / R&D
126-1, Gongdan-Dong, Gumi, Gyeongbuk, Korea TEL : 82-54-461-2005 FAX : 82-54-461-2008
Seoul Office
C-1207 Woolim Lion's Valley, 371-28, Gasan-dong, Geumcheon-gu, Seoul, 150-834, Korea TEL : 82-2-2101-2921~2934 FAX : 82-2-2101-2919
Office in Europe
DIBOSS France : Tel. 33-(0)1-4863-7091 Fax. 33-(0)1-4863-8644 e-mail. baboo@diboss.com
DIBOSS UK : Tel. 44-(0)7766-916-538 Fax. 44-(0)1895-876-316 e-mail. cshan@diboss.co.uk
DIBOSS Nordic : Tel. 46-8-594-63-530 Fax. 46-8-594-63-531 e-mail. info@diboss.se
DIBOSS Europe : Tel. 370-5233-0093 Fax. 370-5233-0093 e-mail. cool@diboss.com

Absolute Picture
DIBOSS

DPC-YSJ051025

Slim and Smart for Satisfaction

This easy-to-handle, affordable model will bring you a neat and highly efficient space with its exceptionally slim design and smart functions. Its great versatility and many practical functions can be installed easily anywhere in the house at your own demand.



▶ LT-32S5*FH

- Brightness : 500 cd
- Contrast Ratio : 1000:1
- Resolution : 1366 x 768
- Viewing Angle : 170(H)x170(V)
- Response Time : 8msec
- DVB-T (Option)
- ATSC (US)
- HD Ready
- Radio, Real Clock
- 1,000 TXT (EU)



▶ LT-26S5*FH



- Brightness : 500 cd
- Contrast Ratio : 1000:1
- Resolution : 1366 x 768
- Viewing Angle : 170(H)x170(V)
- Response Time : 8msec
- DVB-T (Option)
- ATSC (US)
- HD Ready
- Radio, Real Clock
- 1,000 TXT (EU)



▶ LT-20S5*F

- Brightness : 450 cd
- Contrast Ratio : 500:1
- Resolution : 640 x 480
- Viewing Angle : 160(H)x140(V)
- Response Time : 16msec
- Radio, Real Clock

▶ LT-15S5*F



- Brightness : 450 cd
- Contrast Ratio : 500:1
- Resolution : 1024x768
- Viewing Angle : 140(H)x125(V)
- Response Time : 16msec
- HD Ready(NTSC)
- Radio, Real Clock



S.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>