

# DIRECTV® Receiver Setup for TR-6018




In most receivers, the setup is done through the "Repeat Satellite Setup" option in your receiver menu. The following instructions are based on a D12 receiver. If your receiver differs from the options shown, you may need to consult your receiver manual. To access the "Repeat Satellite Setup" option, go through these steps. The wording and display used in your receiver may differ slightly.

**For Help, Call 1-800-788-4417**



1 Press **Menu** on your remote, and then select **Parental, Fav's & Setup**.

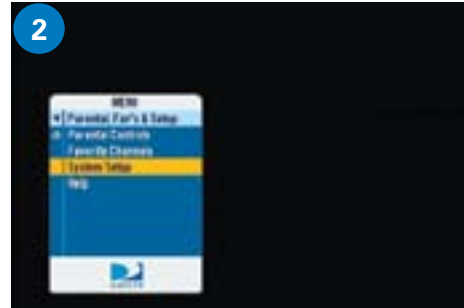

2 Select **System Setup**.



3 In your receiver Menu, you will need to identify the Satellite Menu. The Satellite Menu will have an option for **Satellite Setup**.



4 You may be required to press the **DASH (-)** before proceeding (underneath #7 on the remote).



5 If Switch Type displays "SWM" or if given the option of selecting a Switch Type, select **Multiswitch**. Then, set the Dish Type for **Round, 18", Single LNB, or 1 SATELLITE**,

depending on the wording used in your receiver. Press **Continue**.



6 Then, select the **Dish Pointing** option. Enter the Zip Code for **your current location**. Then, press **OK**.



7 In the box, it now gives you an **AZIM** (Azimuth Angle) and **ELEV** (Elevation Angle). These are the pointing angles you will need when you go to point the dish. Now select

**Signal Strength** to get to the Signal Meter.



8 Select **Signal Meters**.



You'll want to make sure you are looking at **Satellite 101** and **Transponder 1**. If not, use +/- to adjust accordingly.

Now, refer to the **pointing section of the TR-6018**

**manual**. You'll want to have someone watch or listen to the signal meter at the bottom of the screen while pointing. **After pointing, continue with step 10.**



**Once accurately pointed**, the signal meter will show a signal strength. You'll want to make small adjustments to **get the signal as high as possible**. Once the signal is peaked, select **Done**.



This screen will show your signal strength on all transponders. Select **Done** to continue.



Select **Continue** to verify your setup.



In the last step, your setup will be verified.



Once your setup is verified, you may need to download a program guide.

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>