

Replacement Parts List

NOTE: If requested color is not available, similar color will be substituted.

| Part | Cost | Quantity | Total Cost |
|----------------------------|---------|--------------------|------------|
| Crotch Strap/Buckle | \$5.99 | X _____ = \$ _____ | |
| Harness Strap | \$2.99 | X _____ = \$ _____ | |
| Seat Pad | \$29.99 | X _____ = \$ _____ | |
| Harness Retainer | \$1.50 | X _____ = \$ _____ | |
| Locking Clip | \$2.50 | X _____ = \$ _____ | |
| Top Anchorage (Tether) Kit | \$9.99 | X _____ = \$ _____ | |
| Latch Kit | \$24.99 | X _____ = \$ _____ | |
| Cup Holder | \$3.50 | X _____ = \$ _____ | |
| Instructions | \$0.00 | X _____ = \$ _____ | |

Merchandise Total: \$ _____

Shipping and handling: \$ _____

| | | | |
|---------------------|-------------|-------------------------|--------------|
| Up to \$25.00 |\$5.95 | \$100.01 to \$150.00 |\$10.95 |
| \$25.01 to \$50.00 |\$6.95 | \$150.01 to \$200.00 |\$11.95 |
| \$50.01 to \$75.00 |\$8.95 | \$200.01 and up |\$13.95 |
| \$75.01 to \$100.00 |\$9.95 | Outside Continental USA | \$10.00 |

Sales Tax: \$ _____
 (Indiana, California, Arkansas, and Massachusetts residents add applicable sales tax.)

Grand Total: \$ _____

No shipping and handling on instruction manuals on quantities of 6 or less. Add \$.50 for each instruction manual over 6, then add applicable shipping and handling.

Fill Out For Credit Card

Visa Mastercard

Card Exp. Date: _____

Cardholder's Name: _____

Card Number: _____

Signature: _____

CUT ON DOTTED LINE

Commuter/Ventura/ High Back Booster Instruction Manual

www.djgusa.com



This child restraint is designed for use by children whose:

Weight:
 22-80 pounds
 (10.1-36.3 kg)

Height:
 34-52 inches
 (85.1-132.1 cm)

Read all instructions
BEFORE USING
 this child restraint.

KEEP INSTRUCTIONS FOR FUTURE USE.

▲ IMPORTANT!

Failure to follow the warnings on the labels and in the instruction manual can result in the death or serious injury of your child.

Para recibir las instrucciones en español, llame al 1-800-544-1108 o solicítasle por escrito al dirección por arriba.

Before You Begin...

Thank you for choosing this car seat, referred to throughout this manual as a child restraint. The DJG family is committed to creating a child restraint with the most comfort and convenience available today.

Remember, parents are a child's first teachers and examples. If you always buckle your seat belt, your child will think it is the natural thing to do. Make it a firm rule that the vehicle does not go until everyone is buckled up. Make no exceptions.

No one can predict if use of a child restraint will prevent injury or death in a particular crash. However, combined with careful driving, proper use of a child restraint can lower a child's risk of injury or death in most crashes.

Your child's safety is worth the time it will take to read and follow these instructions. After reading, if you still have questions or have any problems with this child restraint, please contact our Consumer Relations Department at:

Dorel Juvenile Group, Inc.


Website: www.djgusa.com
Fax: 1-800-207-8182
Mailing Address: Dorel Juvenile Group, Inc.
P.O. Box 2609
Columbus, IN 47202-2609
Telephone: 1-800-544-1108
7 A.M. to 6 P.M. EST M-TH
7 A.M. to 4:30 P.M. EST FRI









Table of Contents

| | |
|---|-------|
| Warnings..... | 2-4 |
| Registration and Recall | 5 |
| Warm Weather Use and Aircraft Installation | 5 |
| Understanding Your Vehicle | 6-7 |
| Child Restraint Parts | 8-9 |
| Choosing Restraint and Position | 10 |
| Preparing Child Restraint to Fit Your Child | 11 |
| Harness Height..... | 12-13 |
| Securing Your Child in Child Restraint: | |
| Puzzle Buckle Plates | 14-15 |
| Dual Buckle Plates..... | 16-17 |
| Removing Child From Child Restraint | 18 |
| Choosing LATCH or Vehicle Belts..... | 19 |
| Knowing Your Vehicle Belts | 20-21 |
| Locking Clip | 22-23 |
| Forward-Facing Use | 24 |
| Forward-Facing Installation | 25 |
| Vehicle Belt | 26-27 |
| LATCH | 28-30 |
| Adjusting the Top Anchorage Strap (Tether)..... | 31-32 |
| Belt-Positioning Booster Use | 33 |
| Removal of Harness | 34-35 |
| Belt-Positioning Booster Installation | 36-37 |
| Reinstall Harness | 38-39 |
| Removing Seat Pad for Cleaning | 40-41 |
| Trouble Shooting | 42 |
| Installation Tips..... | 43 |
| Warranty | 44 |
| Replacement Parts Order Form | 45-46 |











On the back of the shell there is an expiration date for use of this child restraint. Do not use this seat after the expiration date.

WARNING

Failure to follow these warnings can result in the serious injury or death of your child. To help you recognize those instructions which are most critical for your child's safety, we use this symbol :

-  According to accident statistics, children are safer when properly restrained in the rear seating positions than in the front seating positions.
-  Never place a child less than one-year old forward-facing.
-  Check vehicle instructions for more information about air bag/child restraint use.
-  Make sure the harness height is correct for your child's size.
-  The harness must be snug.
-  The vehicle or LATCH belt must stay tight at the belt path. When you switch from one mode to the next, review the sections of this instruction manual that apply to that mode. If you don't, your child could be seriously injured or killed.
-  Never take your child out of the child restraint or try to tend to your child's needs while the vehicle is moving. Never leave child unattended.
-  Do not use a child restraint with damaged or missing parts.

WARNING

-  Do not use cut, frayed or damaged harnesses.
-  Do not lubricate buckles and fasteners.
-  Do not substitute parts or try to modify the child restraint in any way.
-  Do not use a child restraint that has been in a crash. You must get a new child restraint.
-  Use the child restraint only on vehicle seats that face forward. Do not use on seats that face the sides or rear of the vehicle.
-  Check the vehicle or LATCH belt before each use. Use only if the belt can be tightened properly and securely.
-  This child restraint should be securely belted in the vehicle even when not in use. In a crash or sudden stop, an unsecured child restraint could injure other occupants.
-  Do not use this child restraint if the midpoint of your child's head is above the top of the child restraint's back.
-  Dorel Juvenile Group does not recommend the use of any child restraint accessories except those recommended by DJG.
-  Never allow any child to play with this child restraint; it is not a toy.



WARNING

▲ Secure the top anchorage strap (tether) provided with this child restraint as specified in both the vehicle and child restraint manufacturer's instructions.

▲ Do not remove any of the warning labels or other labels on the child restraint.

▲ Placing your child in a hot child restraint may result in burns.

▲ Read instructions for other warnings.

Warm Weather Use

To avoid your child being seriously burned, take the following precautions:

1. Park in the shade or where sun does not directly hit the child restraint.
2. Cover the child restraint with a sheet or blanket when not in use.
3. Check for hot seat and buckles before placing child in child restraint.

Registration and Recall Information

Child restraints could be recalled for safety reasons. You must register this restraint to be reached in a recall. Fill out the registration card attached to the child restraint or send your name, address and the restraint's model number and manufacturing date to:

Dorel Juvenile Group, Inc.

P.O. Box 2609, Columbus, IN 47202-2609

Attn: Consumer Relations or call 1-800-544-1108

You can now register your child restraint online at www.djgusa.com. Please do not send in your registration card if you registered your child restraint online.

For recall information, call the U.S. Government's Vehicle Safety Hotline at 1-888-327-4236 (TTY: 1-800-424-9153), or go to <http://www.NHTSA.gov>.


Aircraft Installation

This restraint is certified for aircraft use only when used with the internal harness. Do not use as a belt-positioning seat because aircraft seats do not have shoulder belts. Use on forward-facing aircraft seats only and in a position where the lap belt can be tightened securely. This child restraint is installed in an aircraft seat the same way it is installed in the vehicle.

Use the child restraint only with F.A.A. certified equipment. Contact the airline prior to taking a child restraint on board in order to comply with their specific regulations.

Understanding Your Vehicle

Your vehicle's features may be considerably different than those pictured here. Consult your vehicle owner's manual to help identify your vehicle's specific features.

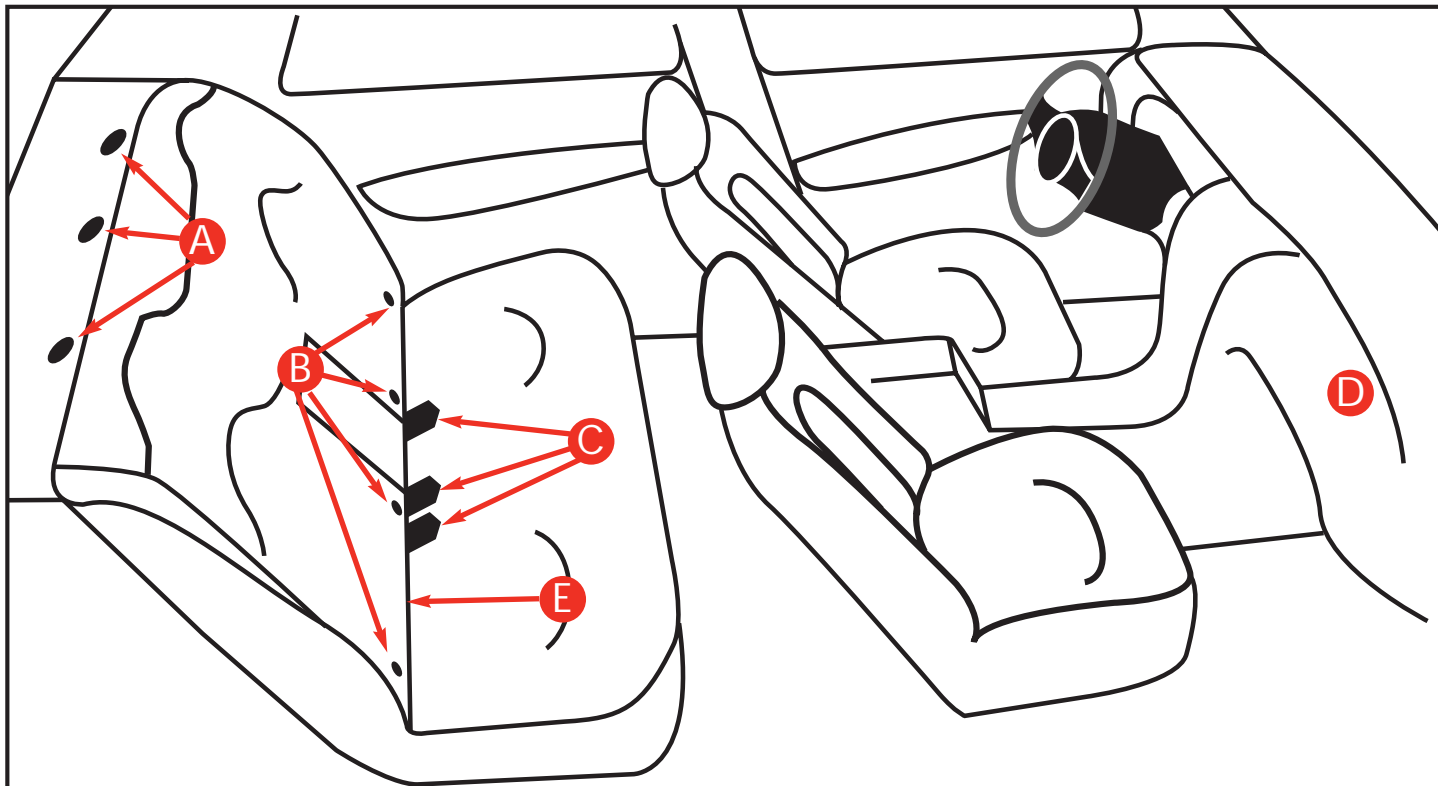

A. Anchor Bracket
For Top Anchorage Strap
(Forward-Facing Only)


B. LATCH Anchors
(In seat bight)

C. Seat Buckles


D. Air Bag
(Consult your vehicle
owner's manual for all air
bag locations)

E. Seat Bight
(Where seat cushions
meet)

Child Restraint Parts

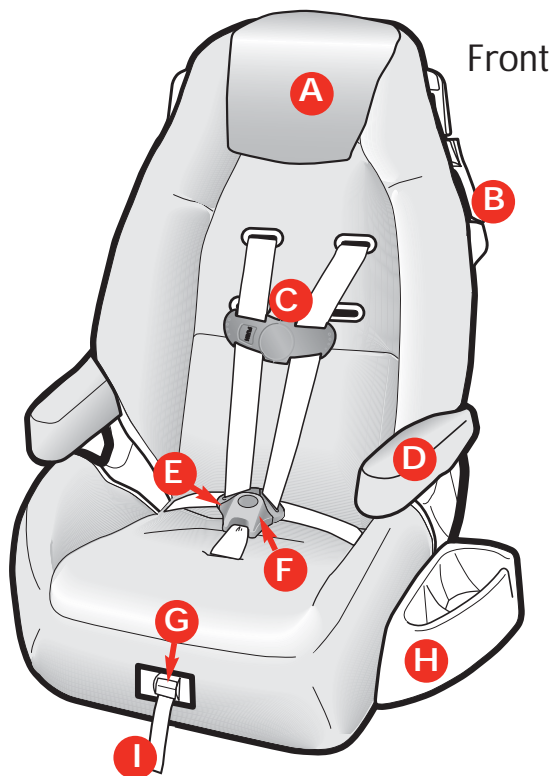


- A. Pillow (Optional)
- B. Shoulder Belt Guide
- C. Harness Retainer
- D. Armrests (Optional)
- E. Buckle Plates
- F. Buckle
- G. Harness Release Lever
- H. Cup Holder
- I. Harness Adjustment Strap

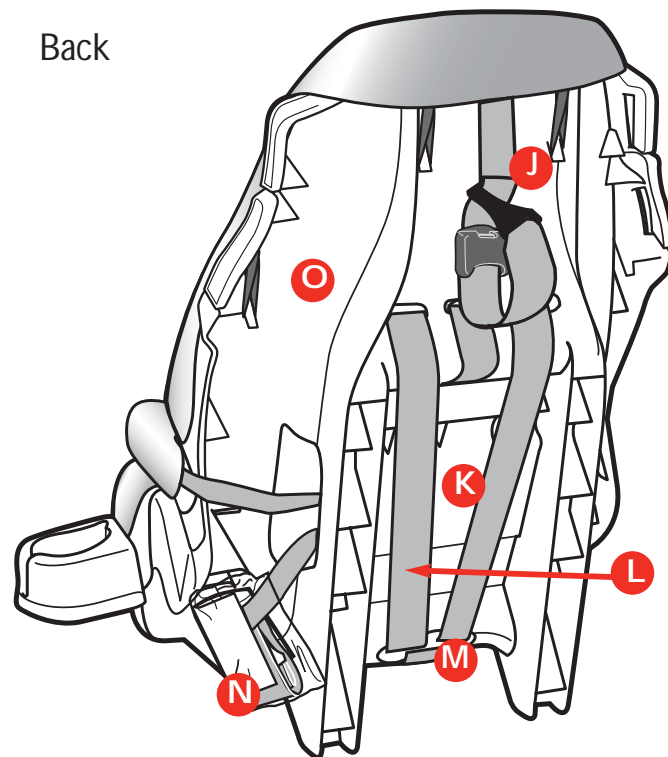

- J. Top Anchorage (Tether) Strap & Hook
- K. Instructions
- L. Locking Clip (behind harness)
- M. Splitter Plate
- N. LATCH Belt (may be between pad and shell)
- O. Shell

Choosing Restraint and Position


Your child's height, weight and age determine how your child restraint should be placed in the vehicle and which restraint should be used.



**22-40 lbs. (10.1-18 kg)
34-43 in. (85.1-110 cm)
and Over 1 Year Old**

Forward-Facing using 5-point harness

Child and child restraint face the front of the vehicle and are placed in the back seat.




**40-80 lbs. (18.1-36.3 kg)
43-52 in. (110.1-132.1 cm)
and Over 1 Year Old**

Belt-Positioning Booster using vehicle lap/shoulder belt combination


Child and child restraint face the front of the vehicle and are placed in the back seat. 5-point harness is removed.

Preparing Child Restraint to Fit Your Child


You **MUST** make these adjustments with your child before you install the child restraint in the vehicle.




Make sure LATCH belt packaging is pulled free of child restraint shell.



Loosen harness by pushing down on the harness release lever while pulling out on the harness.




Press on harness retainer release button and pull apart.



For either style "A" or "B", press red button on buckle to release the buckle plates. Place harness over sides of child restraint.




Place the child's bottom and back flat against the child restraint. This will increase comfort and allow the harness to properly tighten.



To change harness location:


From the back of the seat, remove harness from splitter plate.



Check Harness Height


Forward-Facing Position: Harness guide must be **even with or just above** the shoulders.

If the top harness guides are below the child's shoulders, the child weighs at least 40 lbs. (18.1 kg) and is over 1 year old, convert the seat to a belt-positioning booster.



Pull harness through the harness guides from the front.

Rethread harness into new harness guide location. Refasten harness to splitter plate. Make sure harness does not twist.



Determine which set of harness guide slots works best for your child. Adjust if needed.

⚠ WARNING


Failure to reattach the harness correctly can result in serious injury or death.

Securing Your Child in the Child Restraint; Puzzle Buckle Plates

NOTE: Depending on your model, follow the unbuckling and buckling steps that matches your buckle plates.




Position harness straps over the child's shoulders.



Fit top buckle plate over bottom buckle plate. The connection should be flat.




Hold buckle plates together with one hand and buckle with the other. Push buckle plates into buckle until you hear a "click." Pull up on harness to make sure buckle is locked.

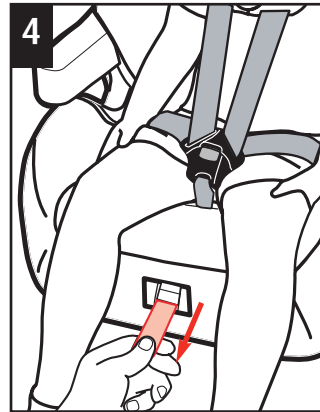

Pull on harness adjustment strap to tighten harness snugly.

NOTE: A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.



Snap the harness retainer together.



Position the harness retainer at mid-chest (even with arm pits), away from the child's neck.

⚠ WARNING:


Failure to fasten and tighten the harness system correctly can result in serious injury or death.

Securing Your Child in the Child Restraint; Dual Buckle Plates


NOTE: Depending on your model, follow the unbuckling and buckling steps that matches your buckle plates.



Position harness straps over the child's shoulders.




Push each buckle plate into buckle until you hear a "click". Remember to always pull up on harness straps to make sure buckle is locked tightly.



Pull on harness adjustment strap to tighten harness snugly.

NOTE: A snug strap should not allow any slack. It lies in a relatively straight line without sagging. It does not press on the child's flesh or push the child's body into an unnatural position.



Snap the harness retainer together.




Position the harness retainer at mid-chest (even with arm pits), away from the child's neck.


⚠ WARNING:

Failure to fasten and tighten the harness system correctly can result in serious injury or death.


Removing Your Child From the Child Restraint



Press on release button and pull apart.




For either style "A" or "B", press red button on buckle to release the buckle plates. Place harness over sides of child restraint.

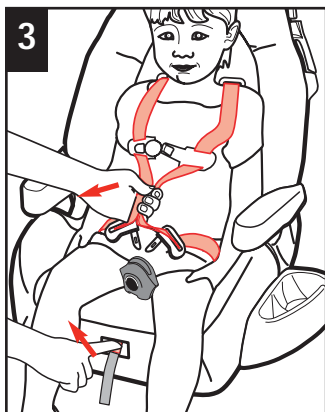

Loosen harness by pushing down on the harness release lever while pulling out on the harness. Remove child.

Choosing LATCH or Vehicle Belts

The LATCH System

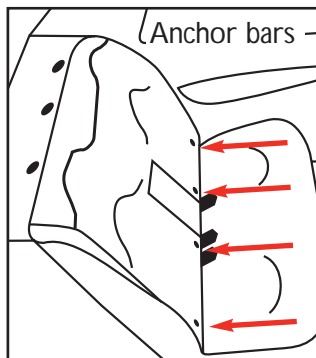


LATCH means **L**ower **A**nchors and **T**ethers for **C**Hildren. Not all vehicles manufactured before September 2002 were equipped with LATCH.

The LATCH system allows a child restraint to be secured in the vehicle without using the vehicle belt system and can **ONLY** be used in vehicles that have the anchor bars installed.

Check your vehicle owners manual to see which seating positions may be equipped with the LATCH system.

Vehicle Belts



If LATCH is not an option, you will use your vehicle's belts. In most cases you will use the lap/shoulder belt combination. There are some vehicle belts that will not work with a child restraint or will require special attention. See next page for specific instructions.

Knowing Your Vehicle Belts

Not all vehicle belts will work with this child restraint. You must determine if your vehicles belts are compatible with this child restraint. If you will use the LATCH system, refer to the LATCH section.

ELR - Emergency Locking Retractor Belts

Definition: These belts only lock in a sudden stop or crash. To see if you have this type of belt, pull on the lap belt, let it return part way, then pull on it again. If it moves freely, it is an ELR belt and the child restraint could work loose during normal driving. Refer to your vehicle owner's manual.

ELR shoulder belts either require a locking clip or cannot be used with any child restraint. **Note: You may use an ELR lap and shoulder belt when using this child restraint as belt-positioning booster; no locking clip is required.**

ELR lap-only belts must be replaced with a manual belt; contact your vehicle dealer. A locking clip will not correct this problem.


Automatic/Passive vehicle seat belts

Automatic (passive) 2-point belt has no lap belt. You must install a lap belt to secure a child restraint. You may also need to install an extra lap belt for an automatic 3-point belt. Refer to the vehicles owner's manual. A locking clip will not correct this problem.

Vehicle belt too short



Contact your vehicle dealer for a seat belt extender.

Belts in center of the door or side panel (A) or middle of the vehicle seat cushion (B).



You must move the child restraint to another seating location. A locking clip will not fix this problem.

See "Locking Clip" section.

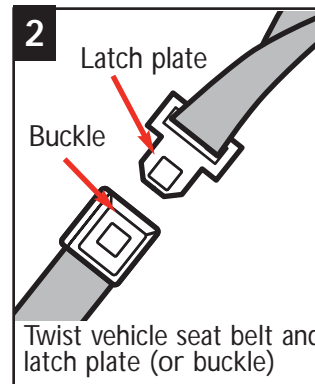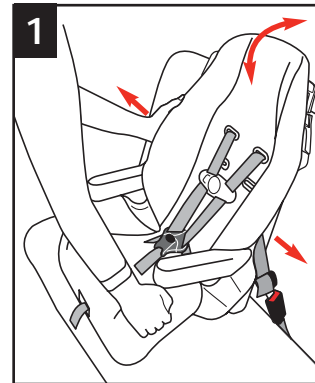

Manual Belts

Manual lap belts are common in the center rear seat and can allow the child restraint to loosen when it is tilted or jarred. After tightening the lap belt securely, tilt and push the child restraint forward and to both sides. If no loosening occurs, your child restraint should be secure.

If loosening does occur, try the following: If the buckle plate slides on the belt, turn the buckle plate over. If the buckle slides, turn the buckle. Refasten the vehicle lap belt. The release button should face **out** after twisting so that it is easy to reach in an emergency.

If the lap belt continues to loosen, the child restraint must be moved to another location in the vehicle. A locking clip will not correct this problem; see your vehicle owner's manual.

⚠ WARNING


Failure to check and adjust the manual belt as described above can result in serious injury or death.

Locking Clip


NOTE: The locking clip is located on the back of the seat. You do not need a locking clip when using this seat as a belt-positioning booster.

Remove the locking clip when the vehicle seat belt is not being used with the child restraint. **A locking clip will not fix all types of seat belt problems.**


Before you put your child restraint in the vehicle, buckle the lap/shoulder belt. Pull on the lap belt portion. If it loosens or slips, you must either use a locking clip to hold the seat belt tight or move the child restraint to another seating location.




1 Thread both vehicle lap and shoulder belts through the slot (as shown) and out other side. Buckle. Pull up on shoulder belt until all slack is out and lap belt is tight.




2 Grasp both vehicle belts together just behind the buckle plate and unbuckle. **NOTE:** If the buckle plate ends up behind the child restraint, grasp the belts to the outside of the child restraint, as close to the buckle plate as possible.



3 Thread both portions of the vehicle belt onto the locking clip.




4 Position locking clip about 1 in. (2.5 cm) from vehicle belt's buckle plate.

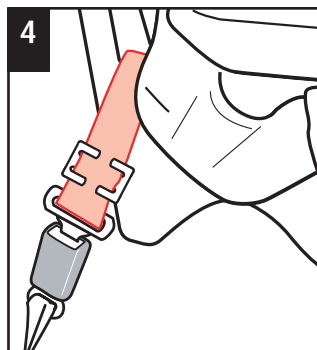


4 Rebuckle belt. Lap belt portion should now be tight. If not, remove locking clip and repeat all steps.


Forward-Facing Use



Lap/Shoulder Belt



Lap Belt



LATCH Belt

Refer to the "Choosing Restraint and Position" section to make sure your child is at the proper weight and height.


⚠ WARNING:

Using this child restraint in any vehicle seat where the lap or LATCH belts cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.

Check vehicle instructions for more information about air bag/child restraint use.

Forward-Facing Installation

After deciding whether to use your Vehicle Belts or LATCH, be sure to read the warnings below as they pertain to both systems.

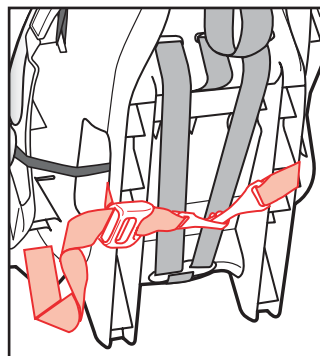


When LATCH is not being used, fasten belt hooks together behind the child restraint as shown.

⚠ WARNING:


Loose LATCH hooks can result in serious injury or death.

Forward-Facing Installation with Vehicle Belts:




Place child restraint **flush** against the back of the vehicle seat **forward-facing** in the back seat.

Thread the vehicle lap belt or lap/shoulder belt combination through the belt path and out other side. Buckle.




Place one knee in the child restraint and push down firmly while pulling up on belt to tighten. For a manual belt, refer to "Knowing your Vehicle Belt" section.



With knee still in child restraint, attach hook to anchor in vehicle. Push down firmly and tighten top anchorage strap.

To adjust top anchorage strap: See "Adjusting Top Anchorage Strap" section.

NOTE: If your vehicle does not have an anchor bracket, tuck the top anchorage strap's hook under the child restraint.

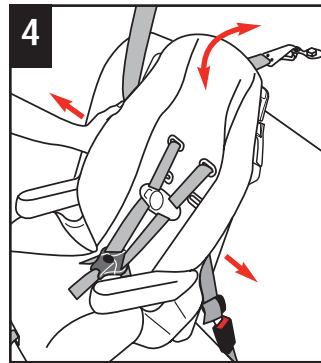

With weakest hand at belt path, tilt and push the child restraint forward and back, and from side to side. If the seat belts do not loosen, your child restraint should be secure.

NOTE: Some "play" from front to back or about an inch from side to side is acceptable. If it moves more, review "Knowing Your Vehicle Belts" and "The Locking Clip" sections.


⚠ WARNING

Using this child restraint in any vehicle seat where the lap belt cannot be tightened securely and properly or where it can be loosened by pulling on it can result in serious injury or death.




After checking for hot seat and buckles, place your child in the child restraint as described in the "Securing Your Child in the Child Restraint" section.

Forward-Facing Installation with LATCH Belt: Install LATCH Belts



NOTE: Do not use LATCH system along with the adult lap or lap/shoulder belt.

Route LATCH belt through upper slot in side of shell.




Pull one LATCH hook across the back and out the other side.


The LATCH adjuster can be on either side, but the belt should not be twisted.




Place child restraint **flush** against the back of the vehicle seat **forward-facing** in the back seat.



Fasten one LATCH belt hook to the anchor in the vehicle seat located in the vehicle seat bight. Repeat for other side of child restraint. See your vehicle owner's manual for locations and more information.




Place one knee in the child restraint and push down firmly while pulling up on the loop to tighten belt.



With knee still in child restraint, attach hook to anchor in vehicle. Push down firmly and tighten top anchorage strap.

To adjust top anchorage strap: See "Adjusting Top Anchorage Strap" section.



With weakest hand at belt path, tilt and push the child restraint forward and back, and from side to side. If the LATCH belts do not loosen, your child restraint should be secure.

NOTE: Some "play" from front to back or about an

inch from side to side is acceptable.


If the child restraint does not remain tight, do not use the child restraint in this seating location with this LATCH system.

⚠ WARNING

LATCH hooks MUST be securely fastened. Failure to do this can result in serious injury or death.



After checking for hot seat and buckles, place your child in the child restraint as described in the "Securing Your Child in the Child Restraint" section.



To remove LATCH: Press down firmly on adjuster side of child restraint and press release button on adjuster to release tension. Unhook LATCH hooks.

Adjusting the Top Anchorage Strap


The top anchorage strap is used for the forward-facing position only.

Most vehicles made after 9/1/99 already have the anchor hardware for a top anchorage strap. Refer to your owner's manual or call your dealer.


Storage of Top Anchorage Strap:

Belt-Positioning Booster position: Place top anchorage strap and anchor hook under the child restraint.


See pictures below and on next page to determine which top anchorage strap model you have. Follow applicable steps.








To Attach Top Anchorage Strap: Put knee in child restraint and push down; attach hook to anchor in vehicle.



To Adjust Top Anchorage Strap: To tighten; pull on free end of top anchorage strap.



To loosen; lift up on top anchorage lock and push lock toward top anchorage hook.



To Attach Top Anchorage Strap: At the adjuster, unlace free end of strap from right side of adjuster slide and loosen into "loops" (1). Put knee in child restraint and push down; attach hook to anchor to estimate how much you need, then unhook (2).

To loosen top anchorage strap: With adjuster in hand, pull the top strap (3) between adjuster and child restraint to desired length. Attach hook to anchor, check fit, repeat steps if necessary. **You must rethread the free end of strap back down through the right slot (5) or the tether will not hold.**

Tighten strap so "loops" are gone and there is no slack or play.


To tighten tether: With adjuster in hand, pull the top strap (4) between adjuster and hook to the desired length. Attach hook to anchor, check fit, repeat steps if necessary. **You must rethread the free end of strap back down through the right slot (5) or the tether will not hold.**

Tighten strap so "loops" are gone and there is no slack or play.


⚠ WARNING

You must follow the threading diagram exactly. Failure to follow these steps could cause the strap to loosen in a crash, which can result in serious injury or death.

Belt-Positioning Booster Use

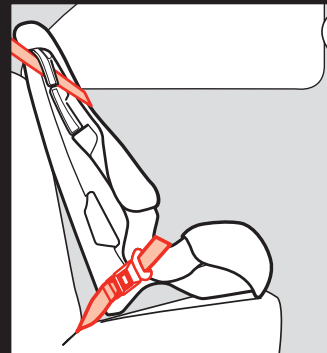

Lap/Shoulder Belt



Refer to the "Choosing Restraint and Position" section to make sure your child is at the proper weight and height to use the belt-positioning booster.

Do not use LATCH or tether strap when using the Belt-Positioning Booster.

You MUST fasten the LATCH belt hooks together behind seat.


When your child is over 40 lbs. (18.1 kg) or 43" (110.1 cm) and over 1 year old, you must remove the harness and use this child restraint as a belt-positioning booster.

⚠ WARNING


Loose LATCH hooks can result in serious injury or death.

Removal of Harness


Harness must be removed for use as a Belt-Positioning Booster.



1 From the back of the seat, unfasten harness from splitter plate.



2 Pull harness adjustment strap as far out as possible.




3 Pull harness through the slots from the front.


Unthread harness from the harness retainer.

Unthread harness from the buckle plates.


Pull harness out of shell.



4 From bottom of seat, locate buckle's metal clip.



5 Insert metal clip up through the shell and pad. From the front, pull buckle free from shell and pad. Lock buckle plates into buckle for future use.



Belt-Positioning Booster Installation



1 Place child restraint against the back of the vehicle seat. **NOTE:** Tuck the top anchorage strap and hook under the child restraint.

Place the child's bottom and back flat against the child restraint.




2 Place lap belt across child's thighs. Lock buckle.

NOTE: If your child restraint has armrests, make sure the lap and shoulder belt are placed under armrest as shown.

⚠ WARNING

Use only the vehicle's lap and shoulder belt system when restraining the child in this booster seat. Failure to do this can result in serious injury or death.

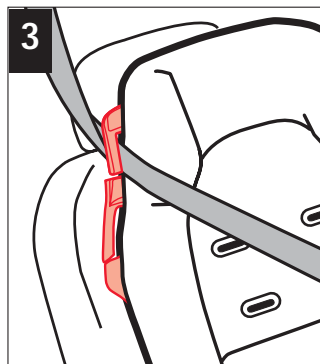

3 Secure the shoulder belt through one of the notches in the shoulder belt guide. The belt should cross the base of the child's neck and across the chest (not the face or neck). Pull up on the shoulder belt to tighten.

Check periodically to ensure your child has not moved out of position and loosened the shoulder belt.

⚠ WARNING

Check vehicle instructions for more information about air bag/child restraint use.

Do Not Use only the lap belt when using this seat as a belt-positioning booster without the internal harness.


The shoulder belt must always be adjusted snugly across the child's chest.

NEVER place the shoulder belt under the child's arms.


Failure to follow these warnings can result in serious injury or death to your child.




Reinstall Harness



1 From the front of child restraint push buckle's metal plate through pad and shell. Make sure buckle faces out.




2 From underneath, pull buckle's metal clip through pad and shell.



3 Pull up on buckle to make sure buckle's metal plate stops against the shell.

WARNING


Failure to place buckle's metal plate completely through pad and shell can result in serious injury or death to the child.

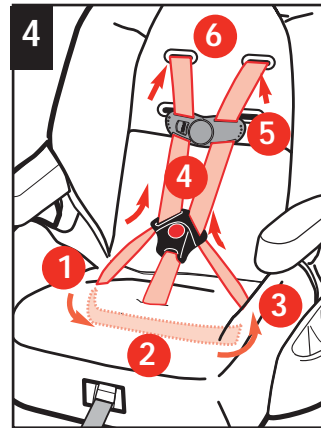

4 Thread the harness down through slot on left side of shell (1), across bottom of shell (2) and up through slot on right side (3).

Thread one latch plate onto harness from back to front (4). Thread the harness retainer (5). Do the same to the other harness end. Make sure the harness is not twisted.

Push harness ends through upper slots in shell (6).




5 Fit loops on harness ends onto the splitter plate.

WARNING


Failure to reattach the harness correctly, can result in serious injury or death.

Removing Seat Pad for Cleaning




1 Remove harness as described in the "Belt-Positioning Booster" section.


If your child restraint has armrests, pull armrest covers off armrests and pull through hole in back of shell.

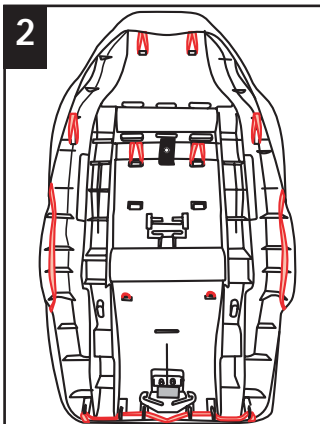

2 From underneath bottom of shell, release the elastic straps shown in red.

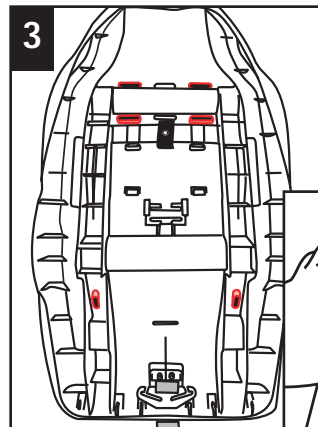

3 Remove the 6 harness guides (shown in red) by pushing down on one edge with one hand and pulling out from the front side with the other.

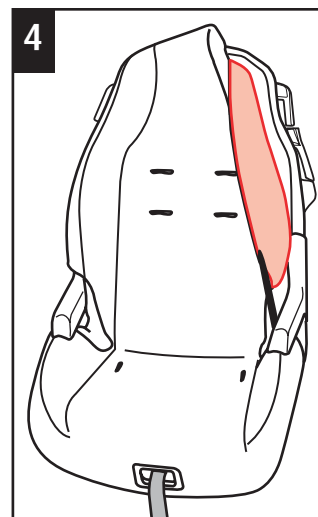

4 Pull pad off shell.

Clean with warm sudsy water, rinse clean and air dry. Do not use bleach or other harsh cleaners.

Replace seat pad by reversing order; lay pad on shell, replace all harness guides, turn shell over to expose the back, rehook elastic straps, and replace armrest covers. Rethread harness (see belt-positioning booster section).

Trouble Shooting

✓ 1. If your child restraint is not held securely by the belt:

Press down firmly on the child restraint and remove all the slack in the belt. Make sure the belt buckle is not up against the child restraint where the belt cannot be tightened. Review Locking Clip section and Top Anchorage Strap Section. If you cannot secure the child restraint tightly, move it to another seating location.

✓ 2. If the child restraint buckle or harness release lever sticks or you cannot get the straps tight enough around child:

DO NOT LUBRICATE. Check around buckle and harness release lever for dropped food, sticky spilled drinks, dirt, leaves, etc. Clean with warm water and/or remove object with tweezers. If you cannot get the harness to adjust and remain tight with the buckle securely locked, do not use the child restraint.

✓ 3. If your harness twists or ropes:

Straighten the harness each time you put your child in the seat to help prevent twisting. Lock the buckle and tighten harness and it will be ready for next use.

✓ 4. In belt-positioning mode, if your child restraint is not held securely by the vehicle belt:

Remove all the slack in the vehicle belt. Make sure the belt buckle is not up against the child restraint where the belt cannot be tightened. If you cannot secure the child restraint tightly, move it to another seating location.

✓ 5. In belt-positioning mode, if the shoulder belt crosses the child's neck when using the child restraint:

Try moving the child restraint toward the center of vehicle or move the vehicle seat forward or back. Check to see if your vehicle has adjustable shoulder belt anchor points. **Do Not** place the shoulder belt behind the child.

Installation Tips:

When using the internal harness, the harness must be positioned at or above the child's shoulders.

When using the internal harness, make sure the vehicle lap belt is locked. When you grasp the child restraint at the belt path, it should not move more than about an inch side to side.

Warranty

Dorel Juvenile Group, Inc. (DJG) warrants this product to the original retail purchaser as follows:

This product is warranted against defective materials or workmanship for one year from the date of original purchase.

An original receipt is required to validate your warranty. DJG will, at its option, provide replacement parts or replace this product. DJG reserves the right to substitute if the part or model has been discontinued.

To make a claim under this warranty you may contact us at www.djgusa.com, fax us at 1-800-207-8182 24 hours a day, write to DJG, Consumer Relations Department, P. O. Box 2609, Columbus, IN 47202-2609, or call 1-800-544-1108 from 7:00 a.m. to 6:00 p.m. EST Monday through Thursday and from 7:00 a.m. to 4:30 p.m. on Friday. **Proof of purchase is required and shipping charges are the responsibility of the consumer.**

Warranty Limitations:

This warranty does not include damages which arise from misuse or abuse of this product.

Limitation of Damages:

The warranty and remedies as set forth are exclusive and in lieu of all others, oral or written, expressed or implied. In no event will DJG or the dealer selling this product be liable to you for any damages, including incidental or consequential damages, arising out of the use or inability to use this product.

Limitation of warranties and other warranty terms and state law rights:

Any implied warranties, including implied warranties of the merchantability and fitness for a particular purpose, shall be limited to the duration and terms of the express written warranty. Some states do not allow limitations as to how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, and you may have other rights, which vary from state to state. Neither DJG nor the dealer selling this product authorized any person to create for it any other warranty, obligation, or liability in connection with this product.

PLEASE COMPLETE AND MAIL THE PRE-ADDRESSED OWNER REGISTRATION CARD WITHIN (30) DAYS OF PURCHASE TO EXPEDITE WARRANTY CLAIMS AND TO VERIFY THE ORIGINAL DATE OF PURCHASE.

Replacement Parts Order Form

Complete the form below. Your model number with color code and manufacture date code **MUST** be included on the form to ensure proper replacement parts. Your model number with color code and the date code can be found on a sticker on the side of child restraint. Payment in U.S. dollars must accompany your order. Choose parts needed from the list on the next page.

Return the form with payment to:

Dorel Juvenile Group, Inc.
Consumer Relations Department
P.O. Box 2609
Columbus, IN 47202-2609

Fax orders to: 1-800-207-8182

Please make money orders payable to Dorel Juvenile Group, Inc. Fill in the area below to charge to Visa or Mastercard. We do not accept personal checks or Discover Card. All outside of U.S. and Canada **MUST** use credit card.

Ship To (Please Print): _____

Name: _____

Address: _____

City: _____

State/Province: _____ Zip _____

Telephone: _____

Email Address: _____

We **MUST have this information to process your order:**

Model Number (5 digits & 3 letters): _____

Manufacture Date (mm/dd/yyyy): _____

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>