



## 4 Port USB 2.0 Slim HUB

### 4 Port Hi Speed Universal Serial BUS 2.0 HUB

#### Introduction

The EDIMAX 4 Port USB HUB is designed in accordance to USB (Universal Serial Bus) specification Rev 1.1 / 2.0 which act as a bridge between the main computer host and the down stream USB devices. It is able to complement PC serial interface by connecting a full range of peripherals, which is very simple and flexible for the users.


There is one upstream port that connects to the PC host and there are four down steam ports connecting up to 127 USB devices in a tiered-star configuration, operates seamlessly with both Microsoft Windows and Apple Macintosh Operating Systems

Supports both full speed (480M bps) and low speed (1.5M and 12Mbps) devices which include keyboards, mice, scanner, CCD, external CD, CDR and CDRW... and It is also protected by automatic per-port over-current detection and recovery and the LED indicating the connection status and power source.

#### Features

- Full compliance with USB specification Rev. 1.1 With one up-stream port and four down-stream ports.
- Connects up to 127 devices in a tiered star configuration.
- Supports both full-speed (12M bps) and low-speed (1.5M bps) devices.
- Select between self-powered mode and bus-powered mode automatically.



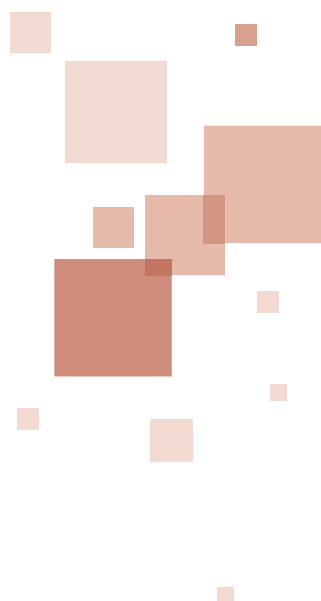

## Edimax Worldwide

Taiwan / Headquarters  
Edimax Technology Co., Ltd.  
TEL : 886-2-2299-5648  
FAX : 886-2-2299-5647  
sales@edimax.com.tw

China  
Beijing Edimax Science &  
Technology Co., Ltd.  
TEL : 8610-6213-9288  
FAX : 8610-6213-9231  
sales@edimax.com.cn

U.S.A.  
Edimax Computer Company  
TEL : 1-408-496-1105  
FAX : 1-408-980-1530  
sales@edimax.com

Latin America  
TEL : 1-786-845-8099  
FAX : 1-786-331-8490  
sales\_latinamerica@edimax.com

Europe  
TEL : 31-499-377344  
FAX : 31-499-372647  
sales@edimax.nl

U.K.  
Edimax Technology (UK) Ltd.  
TEL: 44-0-1908-255901  
FAX: 44-0-1908-255601  
info@edimax.co.uk



## Technical Specifications

Model No.	EU-HB4S
Standards	USB Version 2.0
USB Port	4 External Port
Chipset	NEC
Connector	Four downstream (USB Type A receptacles) One upstream (USB Type B receptacle)
Connectivity	Five cascaded hubs maximum, 5m maximum
Speed	between each hub 480M/bps each port
Compliant	USB 2.0 EHCI and USB 1.1 OHCI Compliant
Connectivity	Up to 127 USB devices
Power	Over current protection, each port 500mA
Driver Support	Windows 98 Windows98 SE Windows Millennium Windows 2000 Windows XP Mac OS
Operating Temperature	0 to 40 Degree
Humidity	5% to 95%, Non-condensing
Compliances	CE, FCC
Warranty	One Year

## Packaging Contents

4 Port USB HUB, Cable, Power Adapte

## Ordering Information

EU-HB4S 4 Port USB 2.0 Slim HUB

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>