


EIKI PLD-42UE: 42" 852x480 Pixel Resolution Data/Video Plasma Display Panel

KEY FEATURES:

- Displays computer and video images on a 42" diagonal screen less than 6" thick.
- Produces a bright, flat, focussed, distortion-free, uniformly-illuminated picture.
- Emits light rather than reflecting it, minimizing the need for room light control.
- Provides a consistent 160° field of view: perfect for use in confined quarters.
- Full VGA: SVGA compatible. Normal (4/3) and Widescreen (16/9) video.

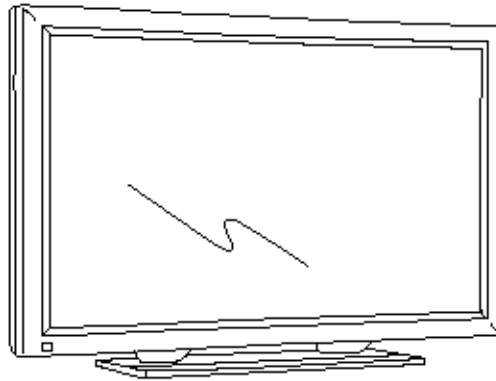

OTHER IMPORTANT FEATURES:

- *Electronic image scaling can automatically resize the incoming signal to fill the screen.*
- *An optional PCI graphics card and PC software can generate 852x480 pixel output.*
- *Included Accessories: Owner's Manual, Power Cord. "Note: Support System Not Included."*
- *Optional Accessories: Table-Top Stand: Horizontal Wall Mounts (choice of 0°, 5°, 10° or 15° tilt), Vertical Wall Mount (0° tilt), Adjustable Ceiling Mount, ATA-style Shipping Case, 852 x 480 PCI Graphics Card & Driver.*

PLD-42UE SPECIFICATIONS:

Screen Size	.42" diagonal
Aspect Ratio	.16:9 (width:height)
Screen Dimensions (HxW)	.20.4" x 36.2" (52cm x 92cm)
Resolution	.852 x 480 = 408,960 pixels
Brightness	.300 cd/m ² (at 15% APL)
Contrast Ratio	.400:1
Color Palette	.16.7 million
Viewing Angle	.up to 160°, horizontally and vertically
Scanning	.Auto: H Sync 15.73~37.9 kHz; V Sync. 50~75 Hz.
Image Scaling	.resizing of input signal to 16/9 aspect ratio
Local Control	.full function, on-board
Remote Control	.full function, Infra Red
RS-232 Control Port	.D-sub 9-pin connector
Computers Standards	.Full VGA: SVGA compatible
SVGA Compression	.Digital

SPECIFICATIONS (cont.)

Computer Inputs	.HDB15 x 1
Video Formats	.Normal (4:3); Widescreen (16:9)
Video Standards	.NTSC, PAL, SECAM
Video Inputs	.Composite: BNC x 1; Y/C: S-Video x 1
DVD Inputs	.Component Video: BNC x 3
Audio Input	.Stereo: RCA x 2 (L&R)
Audio Amplifier	.Stereo: 2 watts RMS each side (L&R)
Built-in Speakers	.Stereo: 2 (L&R)
Operating Noise	.30 dB
Weight	.87 lbs. (39.5 kg)
Dimensions (HxWxD)	.25.2" x 40.9" x 5.9" (64 x 104 x 15cm)
Power Requirements	.100~240V AC, 50/60 Hz
Power Consumption	.350 watts
Power Cord	.10' (3M) Type 3, detachable
Safety Compliance	.ULlisted
Warranty	.1 Year (parts and labor to correct defects)

EIKI

Ā-Key to better communications.

Specifications subject to change without notice.
©1997 EIKI International, Inc. Printed in the USA. 1/28/98

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 17036 Highway 12., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>