


EIKI

A-key to better communications.

EIP-2500

XGA Ultraportable DLP™ Projector

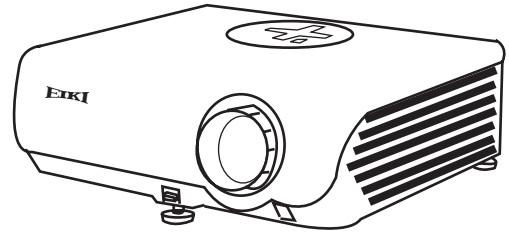

EIP-2500

KEY FEATURES: Model EIP-2500

- 2500 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- DLP™ imaging technology delivers a "seamless" high contrast image.
- True XGA resolution. SXGA+, SXGA, SVGA, VGA & compatible.
- Smart data compression / expansion, and video scaling.
- Convenient manual zoom and focus lens.
- Preset image offset. Vertical digital keystone correction.
- Settings for Standard, Presentation, Movie, Game, and sRGB operation.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports most HDTV resolutions.
- System Lock function. Keylock function.
- Menu Driven Help System. Power Management function.
- Wireless remote control.

Included Accessories: Owner's manual. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15). Wireless Remote Control and Batteries (2 x AA). Component Video Input Cable (HD15~3-RCA). RS-232 Control Adapter (DB9~9-pin DIN).

Optional Accessories: Replacement Lamp. NPC-1 Network Control.

SPECIFICATIONS: Model EIP-2500

Screen Brightness	Standard, 2,500 / Eco 2,150 ANSI Lumens	Video: Resolutions Supported	
Illumination Uniformity	85%	SDTV	480i, 540p, 576i
Size of Color Palette	16.7 Million	EDTV	480p, 576p
Contrast Ratio	2000:1 (Full ON/OFF)	HDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Horizontal Resolution	600 TV Lines (DTV 720p)	Signal Inputs:	
Projection Lamp	275 Watt SHP	1. Computer / Component (with breakout cable)	HD15 x 1
Estimated Lamp Life	Standard, 2,000 / Eco 3,000 Hours of Use	2. Computer / Component (with breakout cable)	HD15 x 1
Imaging System	0.55 in. DDR XGA DMD™	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1
Color System	4-Segment, 3X speed color wheel	3. S-Video	S-Video x 1
Screen Pixels	(1024x768) in stripe configuration	4. Composite	RCA x 1
Total Pixels	786,432	plus Audio shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Lens Type	Manual Zoom and Focus	Signal Outputs:	
Lens Specs	Speed: f:2.4~2.6; FL:19~21.9 mm. (0.75~0.86in.)	Compluter / Component shared between input 1 & 2	HD15 x 1
Lens Ratios	Zoom Range: 1.15:1; Throw:Width: 1.72~1.99:1	plus Audio shared - inputs 1 ~ 4	Stereo: MiniStereo x 1 (variable)
Image Diagonal	102~762 cm (40~300 in.)	Audio: Amplifier	Mono:2 Watt
Image Width	0.81~6.1m. (2.67~20 ft.)	Audio: Built In Speakers	4 x 2.85 cm (1.6 x 1.1 in.) oval x 1
Throw Distance	1.4~12.2 m. (4.6~39.8 ft.)	Operating Noise	33 dBA Standard / 30 dBA in Eco mode
Front Elevation / Maximum Tilt	up to 8° up	Cabinet Size (HxWxD)	109 x 315 x 280 mm. (4.3 x 12.4 x 11.0 in.)
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Overall Size (HxWxD)	120 x 315 x 295 mm. (4.7 x 12.4 x 11.6 in.)
Vertical Keystone Correction	Digital: up-to 13° up or down	Weight	3.9 kg (8.6 lbs.)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 45-85 Hz	Packaged Size	272 x 441 x 459 mm (10.7 x 17.4 x 18.1 in.)
Dot Clock	12~108 MHz	Packaged Weight	7.4 kg (16.3 lbs.)
Image Orientation	Normal, Reversed, Inverted	Power Requirements	100-240V AC, 50/60Hz
Local Control / Power Management	Full Function / Auto Shut-Off	Power Consumption / Heat	350 W / 233 Kcal/hr (922 BTU/hr)
Remote Projector Control	Wireless (Infra Red) x 1	Power Consumption / Heat - Eco	196 W / 169 Kcal/hr (669 BTU/hr)
RS-232 Control Port	Mini DIN 9 Pin x 1	Power Cord	1.8M (6') Type 3, Detachable
Computer Native Resolution	1024 x 768 (XGA)	Safety Compliance	UL / cUL Listed
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Security Facilities	Kensington® Security Slot
Computer: Formats	1400x1050 through 640 x 480	Operating Temperature	5~35°C (41~95°F)
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	User Maintenance	Clean Air Intake, Replace Lamp
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N		
Video: Aspect Ratios Supported	4:3 and 16:9		
Video: Image Sizing	Video Scaling Technology		

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

EIKI Deutschland GmbH, Am Frauwald 12, 65510 Idstein
Telefon: (06126)-9371-0 Telefax: (06126)-9371-11 E-mail Info@eiki.de

Specifications subject to change without notice. ©2005 Eiki International, Inc. Issued September 12, 2005.

Eiki Industrial Co. Ltd. Naniwa Bldg. 4-12 Manzia-Cho Kita-Ku, Osaka 530 Japan
Tel: (01181) 6311-9479 Fax:(01181) 6311-8486 Email: japan@eiki.com URL: <http://www.eiki.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>