



EIP-3000NA


XGA

Ultraportable DLP® Projector

Projectors... and more!

KEY FEATURES: Model EIP-3000NA

- 3000 ANSI Lumens, 85% uniformity, and 2000:1 contrast ratio.
- DLP® imaging technology delivers a "seamless" high contrast image.
- XGA resolution. SXGA+, SXGA, XGA, SVGA, VGA & MAC compatible.
- Built-in Network Connectivity, ready for use: just connect.
- Smart data compression / expansion, and video scaling.
- Convenient manual zoom and focus lens.
- Preset image offset. Automatic vertical digital keystone correction.
- Settings for Standard, Presentation, Movie, Game, and sRGB operation.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports most HDTV resolutions up to 1080i.
- Sealed Optics. No air filter to maintain.
- Extremely quiet: operating noise only 30 dBA in eco mode.
- System Lock function. Keylock function. Wireless remote control.
- Menu Driven Help System. Power Management function.
- 3 Year* Projector Warranty!

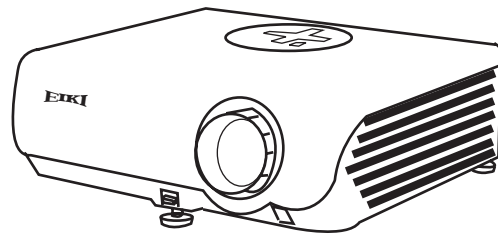

EIP-3000NA

Included Accessories: Owner's manual. Setup Guide CD. System Lock Caution. Quick guide. AC Power Cord. Lens Cover. VGA-type Computer Input Cable (HD15~HD15). Wireless Remote Control & Batteries (AA x 2). Component Video Input Cable (HD15~3-RCA) RS-232 Control Adapter (DB9~9-Pin DIN)

Optional Accessories: Replacement Lamp. Ceiling Mount. Ceiling Post and Plate. Additional VGA-type Computer Input Cable (HD15 ~ HD15). Additional Component Video Input Cable (HD15~3-RCA).

SPECIFICATIONS: Model EIP-3000NA

Screen Brightness	Standard, 3,000 / Eco 2,400 ANSI Lumens	Video: Resolutions Supported	
Illumination Uniformity	85%	SDTV	480i, 540p, 576i
Size of Color Palette	16.7 Million	EDTV	480p, 576p
Contrast Ratio	2000:1 (Full ON/OFF)	HDTV	720p (50/60), 1035i (50/60), 1080i (50/60)
Horizontal Resolution	600 TV Lines (DTV 720p)	Signal Inputs:	
Imaging System	0.55 in. DDR XGA DMD™	1. Computer / Component (with breakout cable)	HD15 x 1
Color System	4-Segment, 3X speed color wheel	2. Computer / Component (with breakout cable)	HD15 x 1
Screen Pixels	(1024x768) in stripe configuration	plus Audio shared - inputs 1 & 2	Stereo: MiniStereo x 1
Total Pixels	786,432	3. S-Video	S-Video x 1
Lens Type	Manual Zoom and Focus	4. Composite	RCA x 1
Lens Specs	Speed: f:2.4~2.6; FL: 0.74~0.85 in. (18.7~21.5 mm)	plus Audio shared - inputs 3 & 4	Stereo: RCA x 2 (L&R)
Lens Ratios	Zoom Range: 1.15:1; Throw:Width: 1.72~1.99:1	Signal Outputs:	
Image Diagonal	40~300 in. (102~762 cm)	Computer / Component (shared input 1 & 2)	HD15 x 1
Image Width	2.67~20 ft. (0.81~6.1m.)	plus Audio: (shared - inputs 1 ~ 4)	Stereo: MiniStereo x 1 (variable)
Throw Distance	4.6~39.8 ft. (1.4~12.2 m.)	Audio: Amplifier	Mono:2 Watt
Front Elevation / Maximum Tilt	up to 8° up	Audio: Built In Speakers	1.6 x 1.1 in. (4 x 2.85 cm) oval x 1
Anti Keystone	Fixed Image Offset 110.5% of Image Height, up	Operating Noise	37 dBA Standard / 30 dBA in Eco mode
Vertical Keystone Correction	Digital: up-to 13° up or down	Cabinet Size (HxWxD)	4.3 x 12.4 x 11.0 in. (109 x 315 x 280 mm.)
Scanning Frequency	Auto: H Sync. 15-70 kHz; V Sync. 45-85 Hz	Overall Size (HxWxD)	4.7 x 12.4 x 11.6 in. (120 x 315 x 295 mm.)
Dot Clock	12~108 MHz	Weight	8.6 lbs. (3.9 kg)
Image Orientation	Normal, Reversed, Inverted	Packaged Size	10.7 x 17.4 x 18.1 in. (272 x 441 x 459 mm)
Local Control / Power Management	Full Function / Auto Shut-Off	Packaged Weight	16.3 lbs. (7.4 kg)
Remote Projector Control	Wireless (Infra Red) x 1	Power Requirements	100-240V AC, 50/60Hz
RS-232 Control Port	Mini DIN 9 Pin x 1	Power Consumption / Heat	385 W / 1314 BTU/hr / (331 Kcal/hr)
LAN Port	RJ45 x 1	Power Consumption / Heat - Eco	308 W / 1051 BTU/hr / (265 Kcal/hr)
Computer Native Resolution	1024 x 768 (XGA)	Power Cord	6' (1.8M) Type 3, Detachable
Computer: Compatibility	SXGA+, SXGA, XGA, SVGA, VGA & MAC 13 ~ 21	Safety Compliance	UL / CSA / CE
Computer: Formats	1400x1050 through 640 x 480	Security Facilities	Kensington® Security Slot
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	Operating Temperature	41~95°F (5~35°C)
Video: Color Systems	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N	User Maintenance	Clean Air Intake, Replace Lamp
Video: Aspect Ratios Supported	4:3 and 16:9	Warranty: (to the original end-use customer)	
Video: Image Sizing	Video Scaling Technology	Projector:	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
		Lamp:	90 Days (Failed Lamp Replaced Pro-Rata)

EIP-3000NA Breakthrough Features

1. Built-in RJ45 LAN connection and web server permits projector monitoring and control over the network using a web browser.
2. High brightness (3000 AL) and contrast (2000:1) in Standard mode
3. Quiet operation (30 dBA) and long lamp life (>3000 hr.) in Eco mode.

Lamp contains Mercury. Do not put in trash. Dispose of as Hazardous Waste, according to Local, State or Federal Laws.

Specifications subject to change without notice. ©2006 Eiki International, Inc. Issued June 7, 2006.

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688-2132. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com

Visit our World Wide Web site: <http://www.eiki.com>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>