


LC-4200: Powerful, Big Screen Multimedia, Anytime, Anywhere.

KEY FEATURES:

- 200 ANSI Lumens light output.
- Compact design with built-in carrying handle fits easily into airline overhead compartments.
- Short-throw lens is easy to operate. Plus, features like an automatic rear project button and on-screen display make it very user-friendly.
- Images are crystal clear, thanks to state-of-the-art polysilicon active matrix TFT LCD panels.

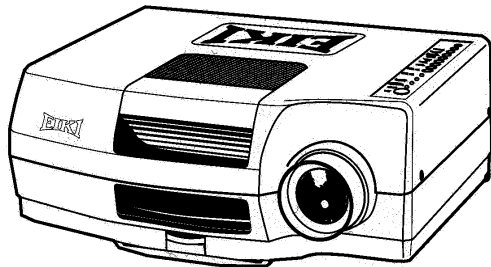

OTHER IMPORTANT FEATURES:

- High light output, long-life 195-Watt, Metal Halide lamp.
- Accepts International Video Standards: NTSC, NTSC 4.43, PAL and SECAM.
- Included Accessories: VGA and MAC II Cables, Lens Cap, Owner's Manual, Dust Cover, Remote Control.
- Optional Accessories: Soft Travel Case with wheels and telescoping handle, MAC monitor cable.

LC-4200 SPECIFICATIONS:

Screen Brightness	.200 ANSI Lumens
Illumination Uniformity	.35+%
Size of Color Palette	.16.7 Million
Contrast Ratio	.100 : 1
Horizontal Resolution	.550 TV Lines
Projection Lamp	.195-Watt, Long-Life Metal-Halide
Light - RGB Distribution	.Dichroic Mirror System
Imaging System	.1.3" PolySilicon TFT Panels x 3
Screen Pixels	.640x480 = 307,200
Total Pixels	.921,600 (307,200 x 3)
Lens Type	.Manual Zoom and Focus
Image Min. - Max. (Diag.)	.30" - 150" diagonal
Image Min. - Max. (Wide)	.2.0' - 10' (0.61m - 3.05m)
Throw - Min. - Max.	.5.2' - 26.1' (1.59 m - 7.97m)
Width-to-Throw Factor	.Approx. 2- 2.6
Elevation: Front	.7 degrees
Keystone Elimination	.Built-In Offset, Ratio (Bottom:Top) 1:3
Scanning	.Auto: H Sync. 15-37.9kHz; V Sync. 50-70kHz
Image Orientation	.Normal, Reversed, Inverted
Remote Control	.IR Remote Control
Computer Standards	.VGA, EGA, CGA, MAC
Computer Channels	.1
Computer Inputs	.Supplied VGA& MAC Cable to HDB 15 x 1

SPECIFICATIONS (cont.)

Computer Monitor Out	.HDB 15 x 1
Computer Audio In	.RCA x 2 (L/R)
Video Standards	.NTSC/PAL/SECAM/NTSC 4.43
Video Channels	.1
Video Input	.RCAX1, BNCx1, S-Video x1
Video Output	.RCAX 1
Video Audio Input	.RCA x 2
Audio - MIC Input	.No
Audio - Amplifier	.3 Watts, Mono
Audio - Built-in Speaker	.2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	.RCAX 1
Audio - Speaker Output	.MiniJack x 1
Size (HxWxD)	.6.2" x 16.9" x 15" (158 x 430 x 385 mm)
Weight	.21.8 Lb. (10.45 kg)
Power Requirements	.120V, 50/60 Hz
Power Consumption	.270 Watts
Power Cord	.10'(3M) 3P Detachable
Safety Compliances	.UL Listed
Warranty - Projector	.1 Year Parts & Labor
Warranty - Projection Lamp	.90 Days Or 2,000 Hours, Whichever Occurs First.

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 1/8/97

EIKI

̄A-Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 355 Cranston Cres., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>