


# LC-4300S: Your Best Value in Portable Multimedia.

## KEY FEATURES:

- 450 ANSI Lumens light output at 90% uniformity, for brilliant images even in normal room light.
- 640 x 480 pixel resolution for VGA & MAC. Also, handles 800 x 600 VGA in compressed mode.
- Compact 21.8 lb. design with built-in carrying handle fits easily into airline overhead compartments.
- High performance lens with quick zoom and focus adjustments projects up to a 300" diagonal picture from distances up to 51.2'.
- Bonus! IR50 wireless remote mouse control and real-time Presentation F/X software.

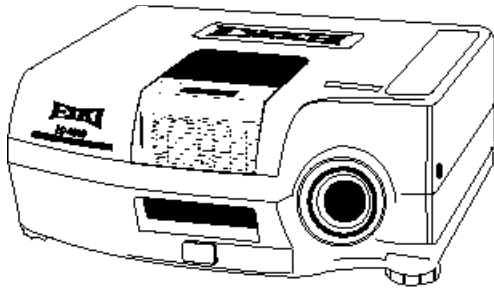

## LC-4300S SPECIFICATIONS:

Screen Brightness	.450 ANSI Lumens
Illumination Uniformity	.90%
Size of Color Palette	.16.7 Million
Contrast Ratio	.100 :1
Horizontal Resolution	.550 TV Lines
Projection Lamp	.200-Watt, Long-Life Metal-Halide
Light - RGB Distribution	.Dichroic Mirror System
Imaging System	.3 x 1.3" polysilicon TFT panels
Screen Pixels	.640x480 = 307,200
Total Pixels	.307,200 x 3 = 921,600
Lens Type	.1:1.3 Manual Zoom and Focus
Lens Speed & Focal Length	.f.2.8-3.2, FL 53-69mm
Image Diagonal (Min-Max)	.30" - 300"
Image Width (Tele: Min-Max)	.2' ~ 20' (0.6m ~6.1m)
Throw Distance (Tele: Min-Max)	.4.9' ~ 51.2' (1.5m ~ 15.6m)
Width-to-Throw Factor	.Approx. 2.0 - 2.6
Elevation: Front	.Adjustable up to 8 degrees
Image offset	.Fixed, Up, Top/Bottom 9:1
Scanning	.Auto: H Sync. 15-37.9kHz; V Sync. 50-70kHz
Image Orientation	.Normal, Reversed, Inverted
Remote Control	.Infrared
Computer Standards	.VGA, EGA, CGA, MAC
Special Capabilities	.800x600 SVGA(compressed)
Computer Channels	.1

# EIKI

̄A-Key to better communications.

## OTHER IMPORTANT FEATURES:

- Short-throw lens projects image sizes from 30 to 300 inches diagonal.
- High light output, long-life 200 -Watt, Metal Halide lamp.
- Included Accessories: Power Cord, Lens Cap, Dust Cover, Owner's Manual, VGA"Y" input cable and MAC "Y" input cable, VGA & MAC terminators, IR Projector Remote Control & Batteries, "RS-232" Computer Control Cable and Software, Bonus: IR50 Remote Mouse & Presentation F/X.
- Optional Accessories: 1.3x Tele Adapter, Soft Travel Case with wheels and telescoping handle. Soft Carry Bag. Hard Shipping Case. Ceiling Mount, MAC Monitor Cable.

## SPECIFICATIONS (cont.)

Computer Inputs	.Supplied VGA& MAC Cable to HDB 15 x 1
Computer Monitor Out	.HDB 15 x 1
Computer Audio In	.RCAX 2 (L/R)
Video Standards	.NTSC/PAL/SECAM/NTSC 4.43
Video Channels	.1
Video Input	.RCAX 1, BNC x 1, S-Video x 1
Video Output	.RCA x 1
Video Audio Input	.RCA x 2
Audio - Amplifier	.3 Watts RMS mono (THD 10%)
Audio - Built-in Speaker	.2" x 3.5" (5cm x 9cm) x 1
Audio - Audio Monitor	.RCAX 2 (L/R)
Audio - Speaker Output	.MiniJack x 1
Fan Noise Level	.Less than 48.5 dB
Size (HxWxD)	.6.2" x 16.8" x 15" (158 x 430 x 385 mm)
Weight	.21.8 Lb. (9.9 kg)
Power Requirements	.120V 50/60 Hz
Power Consumption	.285 Watts
Power Cord	.10'(3M) Type 3, Detachable
Safety Compliance	.UL Listed
Warranty - Projector	.1 Year Parts & Labor
Warranty - Lamp	.3 Months, Free Replacement

Specifications subject to change without notice.

©1998 EIKI International, Inc. Printed in the USA. 1/28/98

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net  
EIKI CANADA, 17036 Highway 12, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca  
Visit our World Wide Web site: <http://www.eiki.ca>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>