


LC-7000: Unleash the Power of Light.

KEY FEATURES:

- 500 ANSI Lumens light output at 85% uniformity for brilliant images--even in normal light!
- True 800 x 600 pixel resolution for real S-VGA/MAC-16 images. Also, handles 1024 x 768 XGA in compressed mode.
- Compact 16 Lb. design with built-in carrying handle fits easily into airline overhead compartments.
- New Wireless Remote/Mouse controls both the projector and the computer, from anywhere in the room.
- High-performance lens with power zoom and focus projects up to a 400" diagonal picture from distances up to 75.7'.

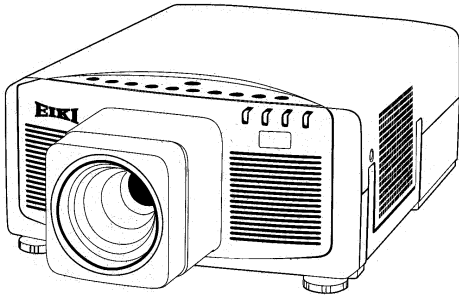

OTHER IMPORTANT FEATURES:

- High light output, long-life 250-Watt Metal Halide lamp.
- Accepts International Video Standards: NTSC, NTSC 4.43, PAL and SECAM., Multi-Voltage, Multi-Cycle Power: 100-120V or 200-240V, 50/60 Hz.
- Included Accessories: VGA Cable and MAC Adaptor, Lens Cap, Owner's Manual, Dust Cover, Remote Control, AC Power Cord. Mouse cables for PS/2, Serial Port and ADB Port.
- Optional Accessories: Soft Travel Case with wheels and telescoping handle. Soft Carry Bag. Hard Shipping Case. Ceiling Mount, MAC Monitor Cable.

LC-7000 SPECIFICATIONS:

Screen Brightness	.500 ANSI Lumens
Illumination Uniformity	.85%
Size of Color Palette	.16.7 Million
Contrast Ratio	.100 :1
Horizontal Resolution	.750 TV Lines
Projection Lamp	.250-Watt, Long-Life Metal-Halide
Light - RGB Distribution	.X-Prism System
Imaging System	.1.3" PolySilicon TFTPanels x 3
Screen Pixels	.800 x 600 in S-VGA/ 832 x 624 in MAC-16
Total Pixels	.1,557,504 (832 x 624 x 3)
Lens Type	.Power Zoom and Focus
Image Min. - Max. (Diag.)	.20" - 400" diagonal
Image Min. - Max. (Wide)	.1.3' - 26.7' (0.4m - 8.1m)
Throw - Min. - Max.	.3.8' - 75.7'(1.15m - 23.08m)
Width-to-Throw Factor	.Approx. 1.8 - 2.8
Elevation: Front	.Variable up to 6 Degrees Up
Image Offset	.9.25 Degrees Up, Ratio (T:B) 8:1
Scanning	.Auto: H Sync. 15-58kHz; V Sync. 50-75Hz
Image Orientation	.Normal, Reversed, Inverted
Remote Control	.Wireless Projector & Mouse Control
Computer Standards	.SVGA, VGA, MAC-16, MAC-13
Special Capabilities	.1024 x 768 XGA -SVGA(compressed)
Computer Channels	.1
Computer Inputs	...(VGCable & MAC Adaptor to) HDB 15 x 1

SPECIFICATIONS (cont.)

Computer Monitor Out	.HDB 15 x 1
Computer Audio In	.RCAx 2 (L/R)
Video Standards	.NTSC/PAL/SECAM/NTSC 4.43
Video Channels	.1
Video Input	.RCAx 1, BNC x 1, S-Video x1
Video Output	.RCAx 1
Video Audio Input	.RCAx 2
Audio - MIC Input	.Mini Stereo x 1
Audio - Amplifier	.2 Watts RMS ea. (L&R) Stereo, (3 Watt peak)
Audio - Built-in Speaker	.4 x 7 cm x 2
Audio - Audio Monitor	.RCA x 2 (L/R)
Audio - Speaker Output	.Mini Stereo x 1
Size (HxWxD)	.5.8" x 11.5" x 17.9" (148.9 x 296 x 460 mm)
Weight	.16 Lb. (7.2 kg)
Power Requirements	.AC, 100-120V/200 - 240V 50/60 Hz
Power Consumption	.355 Watts
Power Cord	.10' (3M) Type 3, Detachable
Safety Compliances	.UL Listed
Warranty - Projector	.3 Year, Parts & Labor to Correct Defects
Warranty - Lamp	.6 Months, Replacement of Failed Lamp

Specifications subject to change without notice.

©1997 EIKI International, Inc. Printed in the USA. 4/16/97

EIKI

̄-Key to better communications.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: eikiusa@ibm.net
EIKI CANADA, 355 Cranston Cres., P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: eikicda@eiki.ca
Visit our World Wide Web site: <http://www.eiki.ca>

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>