


#### KEY FEATURES

- Weighs 8.6 lbs! Footprint smaller than a legal notepad!
- 700 ANSI Lumens, 90% uniformity with 250:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True SVGA resolution. XGA, SVGA, VGA and MAC compatible.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus: adjust the picture from anywhere.
- Digital Zoom magnifies the image, not the pixels.
- 3 Year\* Projector Warranty! 1 Year\* Lamp Warranty!

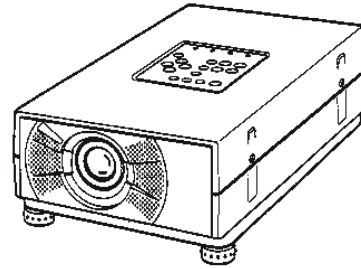

#### OTHER IMPORTANT FEATURES

- UHP (Ultra High Performance) long-life 120 Watt lamp.
- Accepts Composite and S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M .
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100~240V AC, 50 / 60 Hz (automatic).
- Included Accessories – Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote Control With Mouse & Batteries (AA x 2). Mouse cables for computer PS/2, Serial, ADB Port. Soft Carry Bag.
- Optional Accessories – Replacement Lamp. MAC Monitor Cable. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

#### SPECIFICATIONS:

Screen Brightness ..... 700 ANSI Lumens  
 Illumination Uniformity ..... 90%  
 Size of Color Palette ..... 16.7 Million  
 Contrast Ratio ..... 250:1 (ANSI 100:1)  
 Horizontal Resolution ..... 750 TV Lines  
 Projection Lamp ..... 120 Watt UHP  
 Estimated Lamp Life ..... 4,000 Hrs.  
 Recommended Lamp Replacement ..... 2,000 Hrs.  
 Light Organization..... Polarized Beam Splitter  
 Light Distribution..... Dichroic Mirror & X-Prism System  
 Imaging System ..... 0.9" PolySilicon active matrix TFT Panels x3  
 Screen Pixels ..... 800 x 600 in stripe configuration  
 Total Pixels ..... 1,440,000 ((800 x 600) x 3)  
 Lens Type ..... Power Zoom and Focus  
 Lens Specs..... Speed: f:2.0~3.0; FL: 1.42~2.27 in. (36~57.6 mm)  
 Lens Ratios..... Zoom Max:Min: 1.6:1; Throw:Width: 1.97~3.15:1  
 Image Diagonal ..... 20~300 in. (50.8~762 cm)  
 Image Width ..... 1.3~20 ft. (0.4~6.1 m.)  
 Throw Distance ..... 3.6~59.8 ft. (1.1~18.24 m.)  
 Front Elevation / Maximum Tilt ..... up to 2° up  
 Anti Keystone ..... Preset Lens Offset, Ratio (T:B) 19:1  
 Scanning Frequency ..... Auto: H Sync. 15-80Hz; V Sync. 50-100Hz  
 Dot Clock ..... 130 MHz  
 Image Orientation ..... Normal, Reversed, Inverted  
 Local Control ..... Full Function  
 Remote Proj & Mouse Ctrl ..... Wireless (Infra Red) x 1  
 Mouse Control Ports ..... Multi-pole 12 Pin x 1  
 RS-232 Control Port ..... Mini DIN 8 Pin x 1  
 Computer Native Resolution ..... 800 x 600 (SVGA)  
 Computer: Compatibility .....XGA, SVGA, VGA & MAC  
 Computer: Formats..... 1024x768, 832x624, 800x600, 640x480

Computer: Higher Resolutions Displayed panned or Smart Compressed  
 Computer: Lower Resolution ... Displayed normal or Smart Expanded  
 Computer: Channels..... 1  
 Computer: Inputs..... HDB15 x 1  
 Computer: Monitor Out ..... HDB15 x1  
 Computer: Audio In ..... Stereo: MiniStereo x 1  
 Video: Compatibility ..... NTSC / PAL / SECAM / NTSC 4.43 / PAL-M  
 Video: Formats Supported ..... Normal 4:3 and Wide Screen 16:9  
 Video: Image Sizing ..... Video Scaling Technology  
 Video: Channels ..... 1  
 Video: Inputs ..... Composite: RCA x 1, S-Video x 1  
 Video: Audio: Input ..... RCA x 2 (L&R)  
 Audio Amplifier ..... Mono: 1 Watts RMS  
 Built In Speakers ..... 1.58 x 1.18 in. (4x3cm) x 1  
 Line Output..... Stereo: MiniStereo x 1  
 Fan Noise ..... Approximately 43 dB  
 Size (H x W x D) ..... 4.9x8.5x12.9 in. (124x215x326 mm.)  
 Weight ..... 8.6 lbs. (3.9 kg)  
 Packaged Size (H x W x D) .. 14.5x12.4x16.6 in. (367x316x421 mm.)  
 Packaged Weight ..... 19 lbs. (8.6 kg)  
 Power Requirements ..... 100-240V AC, 50/60Hz  
 Power Consumption / Heat ..... 200 Watts / 683 BTU/hr. (172 KC/hr.)  
 Power Cord ..... 10' (3M) Type 3, Detachable  
 Safety Compliance ..... UL Listed  
 User Maintenance ..... Clean Air Filter, Replace Lamp  
 Warranty: Projector 3 Yr / 6000 Hr \*(Parts & Labor to Correct Defects)  
 Warranty: Lamp 1 Yr/2000 Hr \*(Pro-Rata Replacement of Failed Lamp)

..... \* Whichever occurs first

Specifications subject to change without notice. ©1999 Eiki International, Inc. Issued September 1, 1999,

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630, USA. Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com  
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8. Tel: 800-563-3454, Fax: 800-567-4069, E-mail: infocanada@eiki.com  
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: <http://www.eiki.com>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>