


KEY FEATURES:

- Projects true XGA/MAC19: 1024 x 768 pixels with all the clarity of 3 panel LCD technology.
- 1900 ANSI Lumens brightness. Up to a 300" diagonal (20' wide) picture.
- Compact 14.6 lb. design fits easily into airline overhead compartments.
- Smart data compression/expansion, and video scaling technology.
- Displays higher resolutions with panning, or smart compressed.
- Displays lower resolutions normal, or smart expanded.
- 160 MHz dot clock, for compatibility with most workstations.
- Wireless remote with mouse control and power zoom and focus.
- 16 increment Digital Zoom magnifies the image, not the pixels.
- 3 Year* Projector Warranty! 6 month* Lamp Warranty!

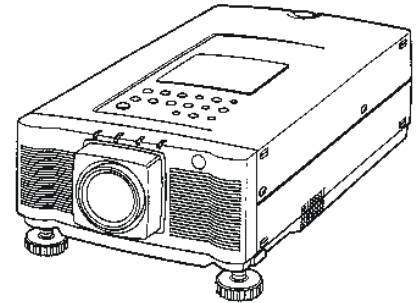

OTHER IMPORTANT FEATURES:

- UHP (Ultra High Performance) long-life 150 Watt lamp.
- Composite & S-Video Input in NTSC, PAL, SECAM / NTSC 4.43 / PAL-M.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- International Power: 100-120 / 200-240V AC, 50/60 Hz (automatic).
- Included Accessories: Owner's Manual, AC Power Cord. VGA-type Computer Input Cable. MAC Adapter. Wireless Remote with Mouse Control & Batteries (AAA x 2). Mouse Cables for PS/2, Serial Port, ADB Port. Dust Cover.
- Optional Accessories: MAC Monitor Cable. Additional Input Cables/Adapters. Replacement Lamp. Soft Carry Bag. Luggage-Style Travel Case with Wheels and Telescoping Handle. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount, Post and Plate.

NOW BRIGHTER!
1900 ANSI LUMENS

SPECIFICATIONS:

Screen Brightness..... 1900 ANSI Lumens
 Illumination Uniformity..... 85%
 Size of Color Palette 16.7 Million
 Contrast Ratio:..... 350:1 (ANSI 100:1)
 Horizontal Resolution.....800 TV Lines
 Projection Lamp..... 150 Watt UHP (Ultra High Performance)
 Estimated Lamp Life & Replace Lamp at 2,000 Hrs & 1000 Hrs
 Imaging System 1.3" PolySilicon TFT Panels x 3
 Screen Pixels 1024 x 768
 Total Pixels 2,359,296 ((1024 x 768) x 3)
 Lens Type..... 1:1.3 ratio Power Zoom and Focus
 Lens Speed & Focal Length. f:1.8~2.1; 1.91~2.48 in (48.4~62.8 mm)
 Lens Protection Auto Lens Retract
 Image Diagonal..... 30"~300"
 Image Width..... 2'~20' (0.61m~6.1m)
 Throw Distance 4.6'~46.1' (1.4~14.04 m)
 Width-to-Throw Factor Approximately 1.78~2.3
 Front Elevation / Maximum Tilt..... up to 6° up (one touch)
 Anti Keystone.....Preset Lens Offset, Ratio (Top:Bottom) 19:1
 Scanning FrequencyAuto: H Sync. 15-100kHz; V Sync. 50-100Hz
 Dot Clock160 MHz
 Image Orientation Normal, Reversed, Inverted
 Local Control..... Full Function
 Remote Control..... Wireless (IR) Projector & Mouse x 1
 Mouse Control Port..... 12 Pin DIN x 2
 RS-232 Control Port..... On Mouse Control Port #2: 12 Pin DIN x 1
 Computer: Native Resolution XGA/MAC19 (1024 x 768)
 Computer: Compatibility.... SXGA, XGA, SVGA, VGA and Macintosh

Computer: Formats . 1280x1024, 1024x768, 832x624, 800x600, 640x480
 Computer: Higher Resolutions.Displayed Panned, or Smart Compressed
 Computer: Lower ResolutionsDisplayed Normal, or Smart Expanded
 Computer: Channels2
 Computer: Inputs.....HDB15 x 2
 Computer: Monitor Out.....HDB15 x 1
 Computer: Audio InputStereo: MiniStereo x 2
 Video: Compatibility.....NTSC / PAL / SECAM / NTSC 4.43 / PAL-M
 Video: Formats Supported.....Normal 4:3 and Wide Screen 16:9
 Video: Image Sizing Video Scaling Technology
 Video: Channels..... 1
 Video: Inputs Composite: RCA x 1; Y/C: S-Video x 1
 Video: Output Composite: RCA x 1
 Video: Audio Input..... Stereo: RCA x 2 (L&R)
 Audio: AmplifierStereo: 2 Watts RMS each (L&R) 3 Watt peak
 Audio: Built-in SpeakersStereo: 1.57 x 2.75 in. (4 x 7 cm.) x 2
 Audio: External Speaker Output Stereo: MiniStereo x 1
 Fan Noise..... less than 45 dB
 Size (H x W x D)..... 5.8 x 10.8 x 16.3 in. (145.5 x 272 x 412.5 mm.)
 Weight..... 14.6 lbs. (6.6 kg)
 Packaged Size (H x W x D) 12.5x15.9 x122.2 in. (317x404x564 mm.)
 Packaged Weight..... 22.1 lbs. (10 kg)
 Power Requirements.....100~120V / 200~240V AC, 50/60Hz
 Power Consumption250 Watts / 854 BTU/hr.
 Power Cord 10' (3M) Type 3, Detachable
 Safety ComplianceUL Listed
 User MaintenanceClean Air Filter, Replace Lamp
 Warranty: Projector 3 Yrs/6000 hr * (Parts & Labor to Correct Defec
 Warranty: Lamp 6 mth/1000 hr * (Pro Rata Replacement of Failed Lamp)

* Whichever Occurs First

Specifications subject to change without notice.

©1999 EIKI International, Inc. 6/1/1999.

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Phone: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
 In Canada: 310 First St., Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Tel: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com
 Fax-on-Demand: (Toll Free) 877-345-4329 Visit our World Wide Web site: [http:// www.eiki.com](http://www.eiki.com)

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>