



Do you use a headset for both your telephone and your computer? Now you can jump from one to the other with the flick of a switch—the SeleCT switch from GN Netcom, Inc. The SeleCT makes it easy to move from phone calls to multimedia to speech recognition to computer-telephony applications. Without fumbling with cords and connectors, or replacing your current GN Netcom equipment.

- Switch instantly from telephone to computer, for speech recognition and computer-telephony (e.g., voice over Internet) applications
- Use with your existing GN Netcom headset
- Enjoy hands-free benefits—and GN Netcom sound quality on all your voice applications





THE ONE-CLICK COMPUTER-TELEPHONY SWITCH.







The SeleCT system easily connects your headset to both your telephone and computer, so you can move from one to the other with the flick of a switch. A 6-foot cord with standard 3.5 mm phono jacks is included.



The Profile SureFit Flex, which gives you a choice of three interchangeable wearing styles (flexible earhook, earloop and headband),




able way to get the hands-free benefit of a headset plus the advantages of CTI.



The MPA-II Multi-Purpose Amplifier works on most phone systems with a modular handset connector. The easiest amplifier to set up and use, the MPA-II features a sliding volume control, headset/handset switch, mute switch and a built-in headset stand. An optional on-line indicator lights when the headset is



The PC/Headset Adapter is the non-switch-

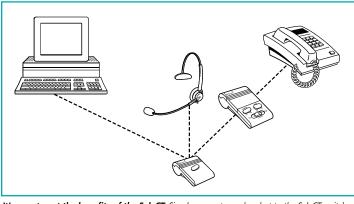

It's easy to get the benefits of the SeleCT. Simply connect your headset to the SeleCT switch, and the SeleCT to your computer and telephone.

Standard Features	SeleCT
Large, user-friendly rocker switch	Δ
6-foot cord w/two 3.5 mm jacks	Δ
12-inch modular phone cord	Δ
Two-Year Warranty	Δ
Velcro mounting kit	Δ

Compatibility		
Amplifier	Carbon	Electret
GN Netcom MPA-II	Δ	Δ
UNEX MP-10A		Δ
MPA Satellite		Δ
ACS Applica		Δ

Fits most sound cards (including Sound Blaster®-compatible) and voice modems using standard 3.5 mm jacks.

General Specifications	
Operating Temperature:	0°–50°
Dielectric Withstand Voltage:	5,000 V AC or 7,000 V DC
Safety:	UL and CE compliant

Ordering Guide		
	Order No.	
SeleCT switch	27313101	
Profile SureFit Flex Headset	405-FLEX-SF	
MPA-II Amplifier	MPA-II	
PC/Headset Adapter	1004831	



For more information:



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com