



Features

- Offers up to 300 LBS Holding Force
- Suitable for fully weatherized indoor/outdoor
- Stainless Housing.
- Electronics potted with epoxy compound applications
- Adjustable mounting plate for easy installation.
- Anti-Residual magnetism designed.

• Statement The 10003S EM-lock is designed for single doors and are suitable for out-swing applications. Installation of in-swing door, narrow-style frames and frameless glass door requires the used an additional bracket. With the accessories provided, the lock can be used on wooden, glass and even metal door. The Electromagnetic Locks are totally sealed in an epoxy filled stainless steel case for water-resistant and vandal-resistant purpose. A threaded conduit fitting ensures weather resistant protection of the wiring therefore it is ideal for indoor and outdoor applications, even in severe weather.

We offers up to 300 pounds holding force with 12V DC power input (24V DC input voltage available by special order) and with the full range of optional brackets. It is the best choice for electronic security industry and system integrators.


Specifications

- Voltage Tolerance: ±15%
- Current Draw: 300mA@12Vdc (at temperature 20C)
- Operating Temperature:-10~55C)14~131F(
- Humidity: 0~95% non-condensing.
- Lock's surface Temperature (when the power is on): ≤ current temperature +20C
- Holding Force: Up to 300 lbs (136 Kg (
 Dimensions:
 - Magnet:(L) 170, (W) 32, (D) 24 mm
 - Armature Plate:(L) 152, (W) 32, (D) 10 mm
- Special Finishes for magnet and armature plate: Zinc
- Epoxy Potting Compound: E87252 (S), UL94V-0
- Weight (Approx.): 1.5 Kg

GIANNI INDUSTRIES, INC.

No. 13, Zhong Sing Road, Tu-Cheng Industrial Zone, Tu-Cheng City, Taipei, Taiwan 23678 Tel: 886-2 2267 7986 / Fax: 886-2 2267 9876 E-Mail: info@gianni.com.tw Website: gianni.tw Copyright 2008 Gianni industries, inc. All rights reserved. DM-CA-10003S Ver. C Published on 2008.05.09

Regular Installation





Unique Anti-Residual design

When the power is switched off, the holding force will be discontinuity and the bolt was installed in armature will pop



Suitable for server cabinet

Warranty

The product is warranted against defects in material and workmanship while used in normal service for a period of 5 year from the date of sale to the original customer. The GEM policy is one of continual development and improvement; therefore GEM reserves the right to change specifications without notice.





The products are manufactured under an ISO 9001 & QC 080000 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction.



Optional Brackets

The door swinging direction and the door frame header are used to determine whether the bracket is required and this identify is a measure of which brackets is suitable. Our optional brackets include L-bracket, LZ-bracket and Ubracket.

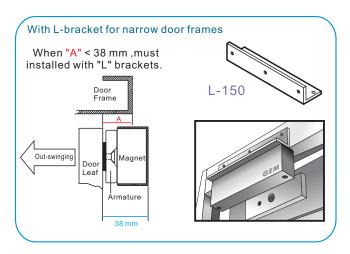

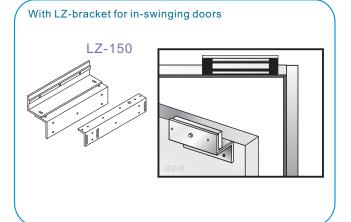

 With GLZ-150 bracket for In-swing frameless glass door

GIANNI INDUSTRIES, INC.

No. 13, Chung Sing Road, Tu-Cheng Industrial Zone, Tu-Cheng City, Taipei, Taiwan 23678 Tel: 886-2 2267 0322 / Fax: 886-2 2267 0323 E-Mail: info@gianni.com.tw Website: gianni.tw Copyright 2008 Gianni industries, inc. All rights reserved. DM-CA-10003S Ver. C Published on 2008.05.09



The products are manufactured under an ISO 9001 & QC 080000 Certified Quality Management Program environment back its product quality, performance and commitment to customer satisfaction. Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com