





Canister Vacuum
Item # XDB520H
for Models CV520HR/HB/HY
25 Paper Bags

Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/trouble shooting checks.

Changing the Dust Bag:

1. Unplug power cord from wall outlet.
2. Open the dust bag compartment, lift up the cover locking tab. (Fig. 1)
3. Pull dust bag retaining clip forward. Remove the dust bag from the dust bag compartment by pulling up the cardboard section. Dispose of paper bags. **Never** reuse paper bags.
4. Insert a new dust bag back into the dust bag support guide inside the bottom of the dust bag compartment making sure that the dust bag rubber seal is aligned correctly against the air intake hole on the unit. (Fig. 1) When inserting the new dust bag, make sure that the arrow on the bag is pointing down. (Fig. 2)
5. Release the dust bag retaining clip, ensuring that the dust bag is held in place.

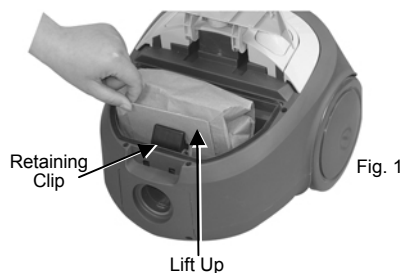

- Caution:** Make sure that the cardboard section of the dust bag is firmly in place inside the dust bag support.
- Caution:** The dust bag compartment will not close if the dust bag is not inserted properly into the unit. **Never** use the vacuum without a dust bag inserted into the unit. **NEVER** reuse the paper dust bags.

NEVER REUSE PAPER BAGS





Canister Vacuum
Item # XDB520H
for Models CV520HR/HB/HY
25 Paper Bags

Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/trouble shooting checks.

Changing the Dust Bag:

1. Unplug power cord from wall outlet.
2. Open the dust bag compartment, lift up the cover locking tab. (Fig. 1)
3. Pull dust bag retaining clip forward. Remove the dust bag from the dust bag compartment by pulling up the cardboard section. Dispose of paper bags. **Never** reuse paper bags.
4. Insert a new dust bag back into the dust bag support guide inside the bottom of the dust bag compartment making sure that the dust bag rubber seal is aligned correctly against the air intake hole on the unit. (Fig. 1) When inserting the new dust bag, make sure that the arrow on the bag is pointing down. (Fig. 2)
5. Release the dust bag retaining clip, ensuring that the dust bag is held in place.

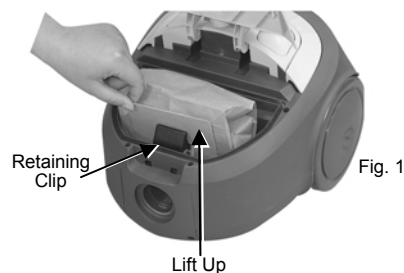

- Caution:** Make sure that the cardboard section of the dust bag is firmly in place inside the dust bag support.
- Caution:** The dust bag compartment will not close if the dust bag is not inserted properly into the unit. **Never** use the vacuum without a dust bag inserted into the unit. **NEVER** reuse the paper dust bags.

NEVER REUSE PAPER BAGS

Replacing the Filters

2 Sets Pre-Motor Filters

2 Sets Post Motor Filters

Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/ troubleshooting.

Changing & Cleaning the Pre-Motor Filter

Your vacuum is equipped with a filtration system to reduce dust and pollen in your home as you clean. The pre-motor filter is located inside the vacuum cleaner body behind the dust bag. Check when changing the dust bag and replace when dirty.

This is a rinse-able filter but should be replaced every three (3) to six (6) months, depending on usage. Never operate the vacuum without **ALL** the filters in place

1. Push the Power On/Off button to the "Off" position and disconnect the power cord from the wall outlet.
2. To remove, open the dust bag compartment cover and remove the pre-motor filter out of the vacuum.
3. Rinse in lukewarm water and let it air dry completely for 24 hours. Do not use a washing machine to rinse the filter. Do not use a hair dryer to dry it. **Air dry only.** When the pre-motor filter is completely dry, insert the filter into the vacuum. (Fig. 1)



Fig. 1

Changing & Cleaning the Post Motor Filter

The post motor filter should be replaced every three (3) to six (6) months depending on usage. Never operate the vacuum without **ALL** the filters in place.

1. Push the Power On/Off button to the "Off" position and disconnect the power cord from the wall outlet.
2. The post motor filter is located at the rear of the unit.
3. Push down on the tab of the post motor filter assembly and pull the assembly out. (Fig. 2)
4. Remove the post-motor from the filter assembly. (Fig. 3)
5. Rinse in lukewarm water and let it air dry completely for 24 hours. Do not use a washing machine to rinse the filter. Do not use a hair dryer to dry it. **Air dry only.** When the post-motor filter is completely dry, insert it in the filter into the vacuum.



Fig. 2

Fig. 3

Replacing the Filters

2 Sets Pre-Motor Filters

2 Sets Post Motor Filters

Warning: To reduce the risk of electric shock, the power cord must be disconnected before changing the bag or performing maintenance/ troubleshooting.

Changing & Cleaning the Pre-Motor Filter

Your vacuum is equipped with a filtration system to reduce dust and pollen in your home as you clean. The pre-motor filter is located inside the vacuum cleaner body behind the dust bag. Check when changing the dust bag and replace when dirty.

This is a rinse-able filter but should be replaced every three (3) to six (6) months, depending on usage. Never operate the vacuum without **ALL** the filters in place

1. Push the Power On/Off button to the "Off" position and disconnect the power cord from the wall outlet.
2. To remove, open the dust bag compartment cover and remove the pre-motor filter out of the vacuum.
3. Rinse in lukewarm water and let it air dry completely for 24 hours. Do not use a washing machine to rinse the filter. Do not use a hair dryer to dry it. **Air dry only.** When the pre-motor filter is completely dry, insert the filter into the vacuum. (Fig. 1)



Fig. 1

Changing & Cleaning the Post Motor Filter

The post motor filter should be replaced every three (3) to six (6) months depending on usage. Never operate the vacuum without **ALL** the filters in place.

1. Push the Power On/Off button to the "Off" position and disconnect the power cord from the wall outlet.
2. The post motor filter is located at the rear of the unit.
3. Push down on the tab of the post motor filter assembly and pull the assembly out. (Fig. 2)
4. Remove the post-motor from the filter assembly. (Fig. 3)
5. Rinse in lukewarm water and let it air dry completely for 24 hours. Do not use a washing machine to rinse the filter. Do not use a hair dryer to dry it. **Air dry only.** When the post-motor filter is completely dry, insert it in the filter into the vacuum.



Fig. 2

Fig. 3

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>