



CES 2900DP Series Water Conditioner

Water Conditioning for Commercial and Light Industrial Applications
Available in Duplex Parallel System with 2" Porting



CES-2900E-136-DP: EV9984-42
 CES-2900E-171-DP: EV9984-43
 CES-2900E-239-DP: EV9984-44
 CES-2900E-341-DP: EV9984-45
 CES-2900E-512-DP: EV9984-46

BENEFITS

Hardness removal of 136,000 to 512,000 grains at flow rates up to 145 gallons per minute continuous

Meter initiated regeneration minimizes salt, water, and electrical costs

Advanced user-friendly controls incorporates two time-tested hydraulically balanced pistons to independently pilot service flow and regeneration

Large capacity brine tank maximizes time between refills

Fiberglass reinforced resin vessels with NSF approved polyethylene liners eliminate worries about corrosion

Duplex parallel tank configuration for continuous soft water supply and higher service flow rates

INSTALLATION TIPS

Locate equipment on a smooth, level surface
 Maintain an air-gap at the end of the drain line
 Secure drain line directly over floor drain or stand pipe
 When connecting to a water heater, install a check valve on the soft water piping to prevent hot water back-up
 When sweating/installing copper piping, protect the control valve from excessive heat
 Check local codes for additional equipment that may be required, such as backflow prevention devices (i.e., RPZ)

OPERATION TIPS

Check for softened water each time salt is added, by using a soap or hardness test kit
 Use a good quality grade of salt - Solar or pellet are preferred
 Check the salt level on a regular basis
 Maintain at minimum salt depth of 6" to ensure a proper regeneration
 On iron bearing waters, use a salt that contains an iron "fighting" additive, or use a resin cleaner on a regular basis
 Check the water level in the brine tank
 If abnormally high - refer to IO guide for troubleshooting information

APPLICATION/SIZING

Warewashing
 Laundry - Linen & Uniform
 Boiler Scale Control
 Water Heater Scale Protection/Reduction
 General Housekeeping

SPECIFICATIONS

Overall Dimensions (inches):

| Model Number | Width (A) | Depth (B) | Height (C) |
|------------------|-----------|-----------|------------|
| CES-2900E-136-DP | 64 | 28 | 79 |
| CES-2900E-171-DP | 70 | 28 | 82 |
| CES-2900E-239-DP | 81 | 34 | 82 |
| CES-2900E-341-DP | 87 | 34 | 89 |
| CES-2900E-512-DP | 99 | 34 | 97 |

Inlet Connection:
2" FNPT

Outlet Connection:
2" FNPT

Service Flow Rate (GPM):

| Model Number | Cont. @ 15 PSI DP | Peak @ 25 PSI DP |
|------------------|-------------------|------------------|
| CES-2900E-136-DP | 94 | 121 |
| CES-2900E-171-DP | 106 | 137 |
| CES-2900E-239-DP | 114 | 148 |
| CES-2900E-341-DP | 123 | 159 |
| CES-2900E-512-DP | 145 | 188 |

Rated Capacity (grains per tank):

| | |
|------------------|---------|
| CES-2900E-136-DP | 136,000 |
| CES-2900E-171-DP | 171,000 |
| CES-2900E-239-DP | 239,000 |
| CES-2900E-341-DP | 341,000 |
| CES-2900E-512-DP | 512,000 |

Pressure Requirements:
25-100 PSI (1.7 -6.9 bar) non-shock

Temperature:
40° F to 100° F

Electrical:
115 VAC/60 HZ/1 Phase


Shipping Weight:

| | |
|------------------|-----------|
| CES-2900E-136-DP | 460 lbs. |
| CES-2900E-171-DP | 880 lbs. |
| CES-2900E-239-DP | 1210 lbs. |
| CES-2900E-341-DP | 1750 lbs. |
| CES-2900E-512-DP | 2750 lbs. |

Operating Weight:

| | |
|------------------|-----------|
| CES-2900E-136-DP | 1990 lbs. |
| CES-2900E-171-DP | 2610 lbs. |
| CES-2900E-239-DP | 3690 lbs. |
| CES-2900E-341-DP | 4780 lbs. |
| CES-2900E-512-DP | 7060 lbs. |

CES 2900DP Series

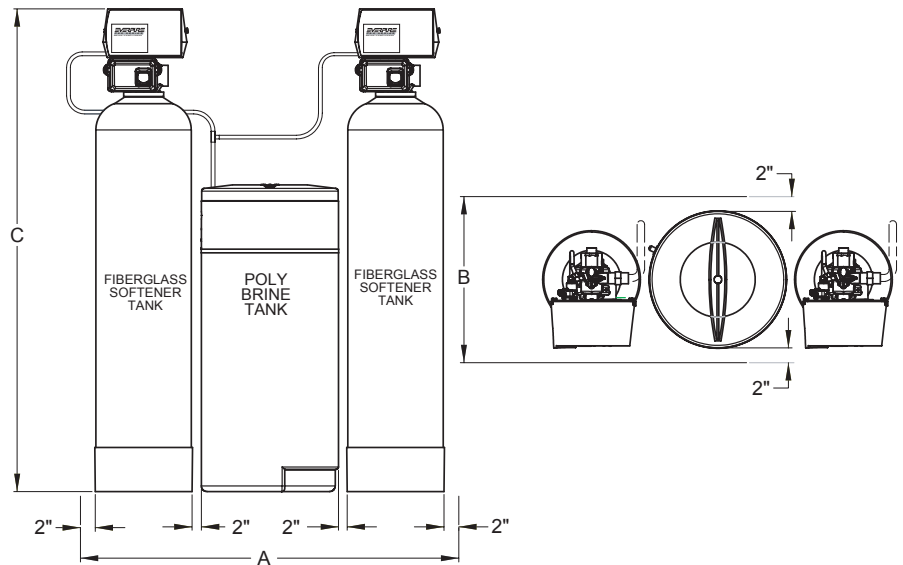

The contaminants or other substances removed or reduced by this water conditioning system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

WARRANTY

Everpure water softening systems are covered by a limited warranty against defects in material and workmanship for the following periods:

- ◆ Complete System - 1 year
- ◆ Control Valve - 5 years
- ◆ Mineral Tank(s) -
 - ◆ 6-13" diameter - 10 years
 - ◆ 14" diameter and larger - 5 years

See printed warranty for details. Everpure will provide a copy of the warranty upon request.

EVERPURE®

EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:
N.V. EVERPURE (EUROPE) S.A.
INDUSTRIEPARK WOLFSTEE
TOEKOMSTLAAN 30
B-2200 HERENTALS
BELGIUM
TEL 32 -14-283500
FAX 32-14-283505

In Japan:
EVERPURE JAPAN LLC
HASHIMOTO MN BLDG. 7F
3-25-1 HASHIMOTO SAGAMIHARA-SHI
KANAGAWA 229-1103
JAPAN
TEL 81-(0)42-775-3011
FAX 81-(0)42-775-3015

Everpure, LLC
1040 Muirfield Drive
Hanover Park, IL 60133
Ph: 630-307-3000 Fax: 630-307-3030

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>