Series filter head exclusively for I	e e e e	C
		BENEFITS
	Twin Series Head: EV9272-24	New redesigned commercial quality filter head for Everpure filter cartridges
		Series plumbed for use with a fine filter cartridg and any Everpure problem solving cartridge
	_A	Built- in water shut off valve and flushing valve makes cartridge change outs easy
		A cartridge nesting feature provides a more secu and durable fit
		Includes mounting box bracket and screws for fast and easy installation. No extra mounting plate is required
	•	New modular design of box bracket allows for future retrofitting of add- on components without disassembly of system. Optional wing bracket kits available
		All wetted parts have passed NSF extraction tes
		All wetter parts have passed tool extraction tes
Ν STAILATION TIPS		Engineered for durability, strength and longevit Will not corrode
	OPERATION TIPS	Engineered for durability, strength and longevit Will not corrode APPLICATION/SIZING
N S T A L L A T I O N T I P S Mounts directly onto flat surface Install vertically so cartridge hangs down	Change cartridges on a regular 6 month preventative maintenance program	Engineered for durability, strength and longevit Will not corrode
Aounts directly onto flat surface nstall vertically so cartridge hangs down vllow 2-1/2" clearance below the cartridge for	Change cartridges on a regular 6 month	Engineered for durability, strength and longevit Will not corrode A P P L I C A T I O N / S I Z I N G For foodservice applications Plumbed in series configuration.
Aounts directly onto flat surface nstall vertically so cartridge hangs down Illow 2-1/2" clearance below the cartridge for asy cartridge replacement Iush filter by running water through filter	Change cartridges on a regular 6 month preventative maintenance program Change cartridges when capacity is reached or	Engineered for durability, strength and longevit. Will not corrode A P P L I C A T I O N / S I Z I N G For foodservice applications Plumbed in series configuration.
Aounts directly onto flat surface nstall vertically so cartridge hangs down	Change cartridges on a regular 6 month preventative maintenance program Change cartridges when capacity is reached or when pressure decreases Always flush the filter cartridge at time of	Engineered for durability, strength and longevit. Will not corrode APPLICATION/SIZING For foodservice applications

Twin Series Head

S P E C I F I C A T I O N S


Overall Dimensions: 6.3"H x 16.6"W x 5.5"D

Inlet connection: 3/4"

Outlet connection: 3/4"

No electrical connection required

Shipping Weight: 3 lbs.

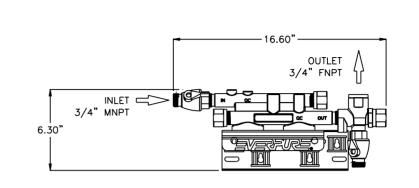

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.



Worldwide Headquarters: EVERPURE, LLC 1040 Muirfield Drive Hanover Park, Illinois 60133 Toll Free (800) 323 - 7873 Tel (630) 307 - 3030 http://www.everpure.com In Europe: Pentair Water Belgium B.V./B.A. Industriepark Wolfstee Toekomstlaan 30 B-2200 Herentals BELGIUM TEL: +32.(0).14.283,500 FAX: +32.(0).14.283,505

In Japan: Hashimoto MN Bldg, 7F 3-25-1 Hashimoto Sagamihara-Shi Kanagawa 229-1103 JAPAN TEL: 81.(0)42.775.301 FAX: 81.(0)42.775.3015 Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com