



EV9333-50

Exubera Pro UC Water Appliance

High volume premium water appliance for drinking water

Exubera Pro UC: EV9333-50



BENEFITS

- Produces ambient, chilled and chilled carbonated water
- Combined with Everpure filtration technologies, allows for premium carafe water
- Capable of supplying water cooled to 38°F-50°F
- Efficient ice bank technology
- Durable construction
- UL Approved

INSTALLATION TIPS

- Fill the ice bank before connecting CO₂, main water supply or power
- Before connecting CO₂, run water through dispenser
- Flush all dispensers before use
- For water pressure regulation install water pressure reducer calibrated to 43.5 PSI
- Ensure John Guest fittings are secure before operation
- Ventilation required for optimal performance
- Do not place unit near any heat source
- To obtain optimal carbonation allow ice bank to form for at least 2 hours.
- Temperature setting should be between 5 and 7

OPERATION TIPS

- Use water pressure regulator (supplied) to ensure proper water pressure.
- Optimal performance requires cleaning machine regularly & performing semi-annual sanitization
- To ensure the highest quality water, use in combination with an Everpure filtration system
- CO₂ Pressure: 43.5 - 58 PSI
- A 20 lb CO₂ cylinder will provide roughly 400 gallons of carbonated water**
- **Varies based on CO₂ pressure

APPLICATION / SIZING

- Maximum Cold Water Capacity: 31.7 gph
- Maximum Continuous Cold Water Capacity: 18.5 gph
- Suggested tubing: 3/8" OD, 1/4" ID polyethylene tubing

Exubera Pro UC Water Appliance

SPECIFICATIONS

Overall dimensions:

23"H x 14"W x 22"D

Inlet connections:

3/8" OD, 1/4" ID John Guest Fittings

Outlet connections:

5/16" OD John Guest Fittings

Power Supply:

115V, 60Hz, 800W, 12.0Amps

Compressor Power:

1/3 HP

Refrigerant Gas:

CFC Free R134a

Maximum Cold Water Capacity:

31.7 gph

Maximum Continuous Cold Water Capacity:

18.5 gph

Shipping Weight:

104 lbs

Operating Weight:

118 lbs

Optimum Water Operating Pressure:


43.5 PSI (3 Bars)

Water Pressure Range:

29 - 43.5 PSI (2 - 3 Bars)

C02 Pressure Range:

43.5 - 58 PSI (3 - 4 Bars)

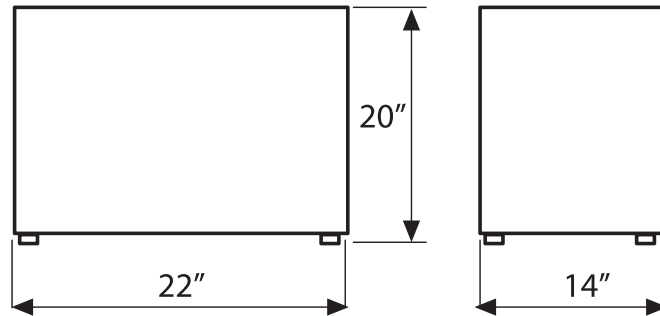

WARRANTY

Everpure water treatment systems (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Everpure will provide a copy of the warranty upon request.

EVERPURE

Worldwide Headquarters:

EVERPURE, LLC
1040 Muirfield Drive
Hanover Park, Illinois 60133
Toll Free (800) 323-7873
Tel (630) 307-3000
Fax (630) 307-3030
<http://www.everpure.com>

In Europe:

Pentair Water Belgium B.V./B.A.
Industriepark Wolfstee
Toekomstlaan 30
B- 2200 Herentals
BELGIUM
TEL: +32.(0).14.283.500
FAX: +32.(0).14.283.505

In Japan:

Hashimoto MN Bldg. 7F
3-25-1 Hashimoto Sagamihara-Shi
Kanagawa 229-1103
JAPAN
TEL: 81.(0)42.775.3011
FAX: 81.(0)42.775.3015

Everpure
1040 Muirfield Drive
Hanover Park, IL 60133

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>