



WARRANTY

LIMITED WARRANTY Fellowes, Inc. ("Fellowes") warrants the cutting blades of the machine to be free from defects in material and workmanship for 7 years from the date of purchase by the original consumer. Fellowes warrants all other parts of the machine to be free of defects in material and workmanship for 2 years from the date of purchase by the original consumer. If any part is found to be defective during the warranty period, your sole and exclusive remedy will be repair or replacement, at Fellowes' option and expense, of the defective part. This warranty does not apply in cases of abuse, mishandling, or unauthorized repair. ANY IMPLIED WARRANTY, INCLUDING THAT OF MERCHANTABILITY OR FITNESS

FOR A PARTICULAR PURPOSE, IS HEREBY LIMITED IN DURATION TO THE APPROPRIATE WARRANTY PERIOD SET FORTH ABOVE. In no event shall Fellowes be liable for any consequential or incidental damages attributable to this product. This warranty gives you specific legal rights. The duration, terms, and conditions of this warranty are valid worldwide, except where different limitations, restrictions, or conditions may be required by local law. For more details or to obtain service under this warranty, please contact us or your dealer.

MS-470Ci



Please read these instructions before use.
Do not discard: keep for future reference.

Help Line

Australia	+1-800-33-11-77
Canada	+1-800-665-4339

Europe	00-800-1810-1810
Mexico	+1-800-234-1185
United States	+1-800-955-0959

Fellowes 1789 Norwood Avenue, Itasca, Illinois 60143-1095 • USA • 630-893-1600

www.fellowes.com

Australia	Benelux	Canada	China	France	Germany	Italy	Japan
Korea	Poland	Russia	Singapore	South Africa	Spain	United Kingdom	United States

fellowes.com



ENGLISH

Model MS-470Gi

KEY

- | | | |
|----------------------------|----------------------------|----------------------------------|
| A. SafeSense® Technology | F. Basket - CD (inside) | J. Control Panel and LEDs |
| B. Paper entry | G. See safety instructions | 1. Reverse |
| C. CD entry | H. Disconnect power switch | 2. ON/OFF |
| D. Door | I. Casters | 3. Forward |
| E. Basket - paper (inside) | | 4. Bin full |
| | | 5. Door open |
| | | 6. Remove paper |
| | | 7. Sheet capacity indicator |
| | | 8. SafeSense® indicator (yellow) |
| | | 9. Auto button |

CAPABILITIES

Will shred: Paper, credit cards, CD/DVDs, staples and standard paper clips

Will not shred: Adhesive labels, continuous form paper, transparencies, newspaper, cardboard, large paper clips, laminates, file folders, X-rays or plastic other than noted above

Paper/Card shred size:

Micro-Cut 5/64 inches x 15/32 inches (2mm x 12mm)

CD shred size:

Strip-Cut 25/64 inches (10mm)

Maximum:

Sheets per pass 12*

CDs/Cards per pass 1*

Paper entry width 9 1/2 inches (240mm)

CD entry width 5 13/64 inches (132mm)

*8.5 inches x 11 inches, 20lb., (75g) paper at 120V, 60 Hz, 6Amps; heavier paper, humidity or other than rated voltage may reduce capacity. Recommended daily usage rates: 4,000 sheets per day; 200 credit cards; 10 CDs; 5 paper clips

Fellowes SafeSense® shredders are designed to be operated in home and office environments ranging between 50 – 80 degrees Fahrenheit (10 – 26 degrees Celsius) and 40 – 80% relative humidity.

ADVANCED PRODUCT FEATURES

100% JAM PROOF
Jam Proof System
 Eliminates frustrating jams by preventing overloads and powering through misfed paper.

SAFE SENSE TECHNOLOGY
Patented SafeSense® Technology
 Stops shredder immediately when hands are too close to the paper entry.

SLEEP MODE
Sleep Mode
 Energy saving feature shuts down automatically after 2 minutes of no shredding activity

MICRO SHRED
MicroShred Technology
 MicroShred cut provides maximum security by shredding paper into over 2,513 particles per 8 1/2" x 11" mm sheet.

⚠ WARNING: IMPORTANT SAFETY INSTRUCTIONS — Read Before Using!

- Keep away from children and pets. Keep hands away from paper entry. Always set to off or unplug when not in use.
- Keep foreign objects – gloves, jewelry, clothing, hair, etc. – away from shredder openings. If object enters top opening, switch to Reverse (◀◀) to back out object.
- Never use aerosol products, petroleum based lubricants or other flammable products on or near shredder. Do not use canned air on shredder.
- Do not use if damaged or defective. Do not disassemble shredder. Do not place near or over heat source or water.
- This shredder has a Disconnect Power Switch (H) that must be in the ON (I) position to operate shredder. In case of emergency, move switch to OFF (O) position. This action will stop shredder immediately.
- Avoid touching exposed cutting blades under shredder head.
- Use only designated entry for shredding CDs
- Keep finger away from CD hole when shredding.
- Do not put foreign objects in paper entry.
- The grounded socket-outlet shall be installed near the equipment and shall be easily accessible.


BASIC SHREDDING OPERATION

PAPER/CARD OR CD

- Plug in and put disconnect power switch in ON (I) position
- Press (⏻) ON to activate
- Feed paper/card straight into paper entry and release
- Hold CD at edge, feed into CD entry and release
- When finished shredding set to OFF (⏻) or Do nothing and shredder will go automatically to sleep mode
- Do nothing and shredder will go automatically to sleep mode

100% JAM PROOF SYSTEM OPERATION*

Eliminates frustrating jams by preventing overloads and powering through misfed paper.

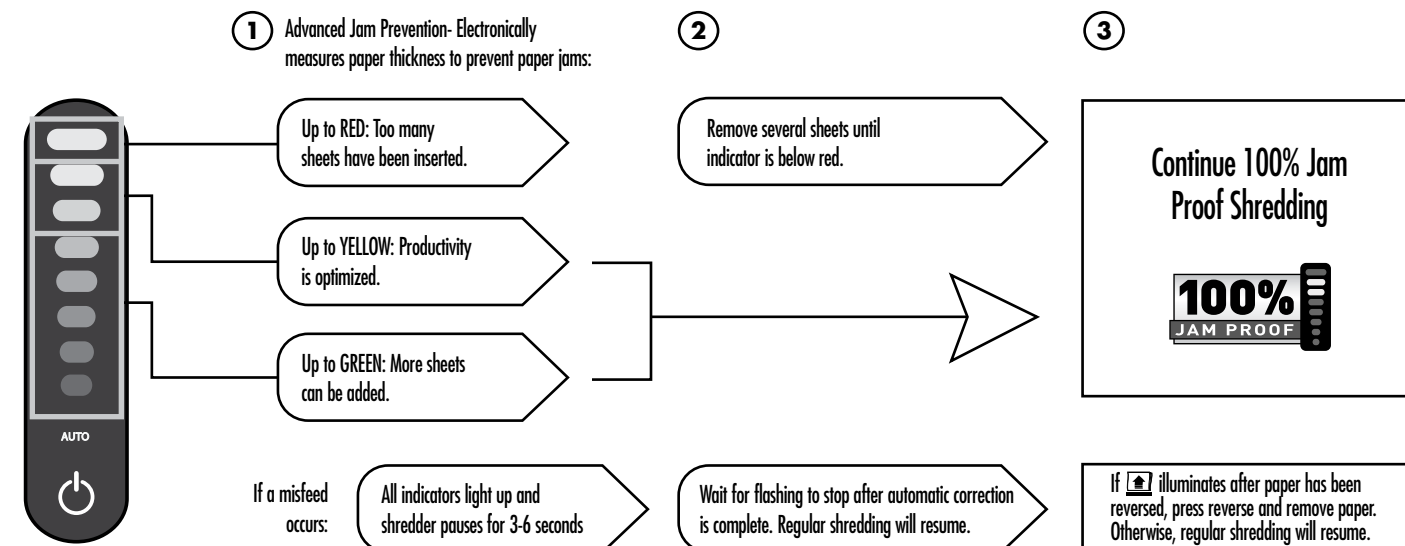

*100% Jam Proof when used in accordance with user manual

SLEEP MODE

WHEN IN SLEEP MODE

- In sleep mode
- To get out of sleep mode or insert paper touch control panel
- insert paper

SAFESENSE® TECHNOLOGY OPERATION

SET-UP AND TESTING

- Turn the shredder ON (⏻) to activate SafeSense®
- Touch test area and look for the SafeSense® indicator to illuminate
- SafeSense® is active and working properly
- If hand is held on SafeSense® area more than 2 seconds Shredder will shut off

BASIC PRODUCT MAINTENANCE AND TROUBLESHOOTING

OILING SHREDDER

All micro-cut shredders require oil for peak performance. If not oiled, a machine may experience diminished sheet capacity, intrusive noise when shredding and could ultimately stop running. To avoid these problems, we recommend you oil your shredder each time you empty your waste bin.

FOLLOW OILING PROCEDURE BELOW AND REPEAT TWICE

- Turn off and unplug shredder
- *Apply oil across entry
- Press and hold reverse (◀◀) 2-3 seconds

CLEANING AUTO-START INFRARED SENSORS

Paper detection sensors are designed for maintenance free operation. However, on rare occasions the sensors may become blocked by paper dust causing the motor to run even if there is no paper present (Note: two paper detection sensors are located in the center of the paper entry).

TO CLEAN THE SENSORS

- Turn off and unplug shredder
- Locate Auto-start infrared sensor
- Dip cotton swab in rubbing alcohol
- Using cotton swab, wipe away any contamination from the paper sensors

⚠ CAUTION *Only use a non-aerosol vegetable oil in long nozzle container such as Fellowes 35250

PREVENTIVE MAINTENANCE AND MISCELLANEOUS TROUBLESHOOTING

- Self Cleaning Cycle: Shredder periodically cycles in forward and reverse lasting 3-6 seconds.
 - Empty wastebasket when bin full indicator lights up.
 - Shredder won't run if the door is open, or bin needs to be emptied. Bin must be in machine, with door closed, in order for machine to operate properly.
 - Maintenance is an important part of protecting your investment. Don't forget our oil (35250) and shredder bags (36054).
- Go to Support Section at www.fellowes.com or see back page of manual for useful telephone numbers.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>