


# FPS 2160

**symmetric amplifier**

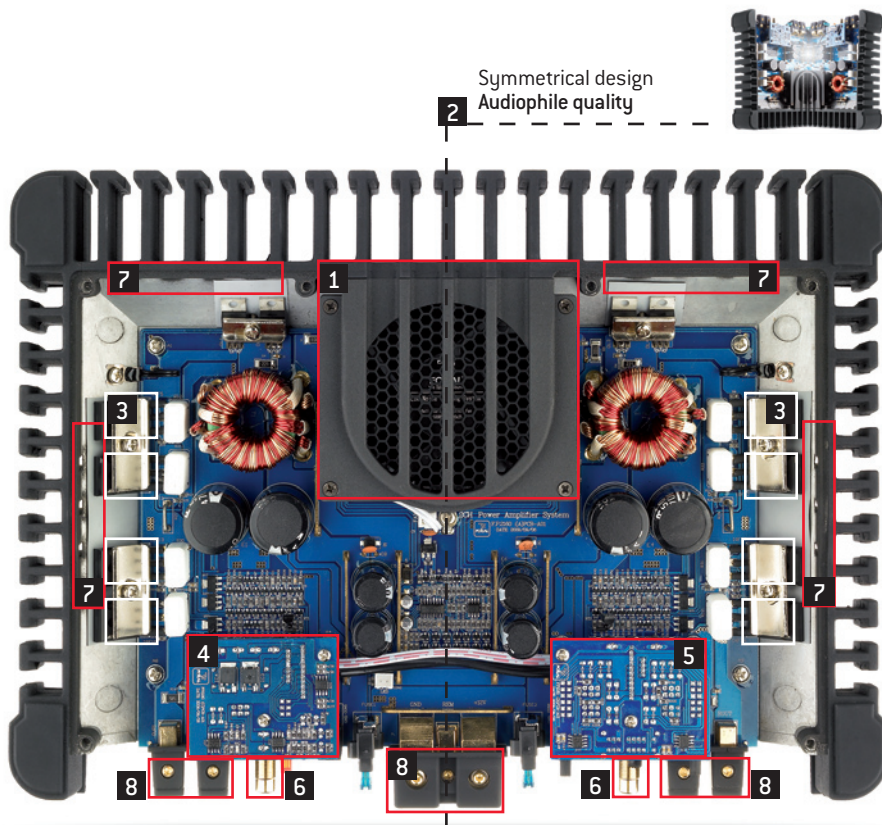

2 Symmetrical design  
Audiophile quality

- 1 Progressive controlled cooling system  
Regulates the amplifier temperature
- 3 Insulated Gate Bipolar Transistor (IGBT)  
Audiophile and powerful
- 4 Direct mode  
The audio signal is directly amplified
- 5 High-pass, low-pass and band-pass  
crossovers  
Adjustable from 50Hz to 5kHz
- 6 Pseudo-balanced input  
No parasite
- 7 Controlled cooling system  
Air flow control
- 8 Safety terminal  
Cable and sheath complete integration

## Technical characteristics:

CEA 2006 power (4 Ohms,  $\leq 1\%$  THD+N, 14,4 Volts): 2x105W  
Nom. power: 2x160W into 2 Ohms with 0.11% THD  
Nom. power (bridged mode): 1x360W into 4 Ohms with 0.4% THD  
Adjustable high-pass crossover from 50Hz to 5kHz  
Adjustable low-pass crossover from 50 Hz to 5kHz  
Adjustable band-pass crossover from 50 Hz to 5kHz  
Direct Mode  
Protections: short-circuit, direct current, thermal overload,  
polarity reversal

## It makes the difference:

- Symmetrical design
- Direct Mode
- Stable into 2 Ohms stereo
- High-Cap Compatible
- Class AB amplification (IGBT)



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>