


# SOLID 1

Subwoofer classe AB power amplifier


- Mono amplifier
- Remote control
- High and low level inputs



## THD / Power

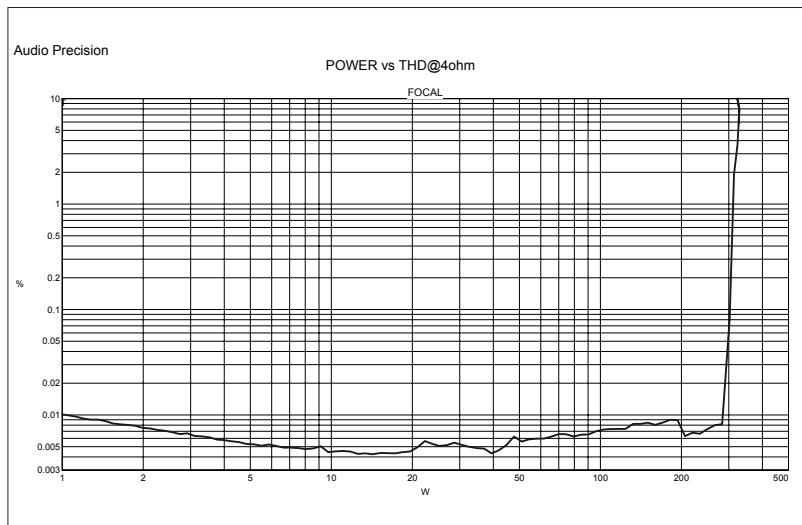

## Mechanical Drawing

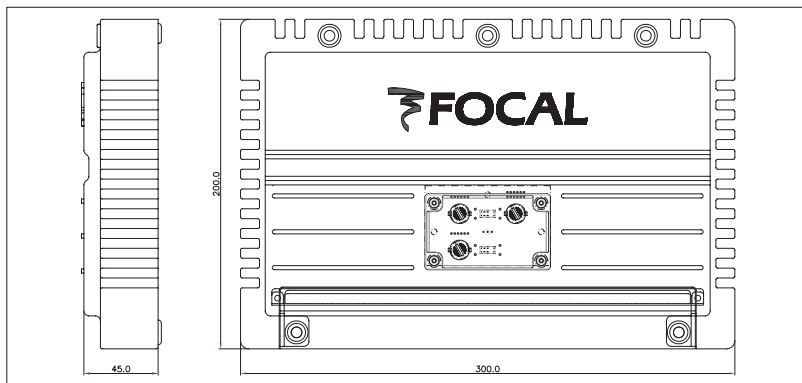


Focal® is a trademark of Focal-JMLab® - BP 374 - 108, rue de l'Avenir - 42353 La Talaudière cedex France - Tél. [33] 04 77 43 57 00 - Fax [33] 04 77 37 65 87 - www.focal-fr.com - SCBD081505/1

## Preliminary specifications

### Specifications

Nominal power measured at 14.4V continuously @ 4Ω	1 x 300 W
Nominal power measured at 14.4V continuously @ 2Ω	1 x 470 W
Power in bridge mode measured at 14.4V continuously @ 4Ω	-
Signal/noise ratio	> 85dB (A)
Damping factor at 4Ω	50 to 50Hz
Frequency response (-1dB)	10 Hz – 150Hz
Input impedance	20kΩ
Input sensitivity	0.2 – 5V
Input sensitivity high level	0.4 – 9Vrms
High-pass crossover (1/2 and 3/4 channels)	-
Low-pass crossover (sub channel)	50 – 150Hz (12 dB/oct)
Remote control (sub channel)	YES
Adjustable bass boost level	0 to +9dB at 50Hz
Variable phase (SUB)	0 or 180°
Subsonic filter	35Hz (24dB/oct)
Maximum cross section of loudspeaker cables	10mm <sup>2</sup> 7 AWG
Maximum cross section of power cables	35mm <sup>2</sup> 2 AWG
Protections	Short-circuit Thermal overload Overvoltage Polarity reversal
Dimensions (HxWxD)	1 <sup>3/4</sup> x 11 <sup>13/16</sup> x 7 <sup>7/8</sup> " (45 x 300 x 200mm)



**FOCAL**  
THE SPIRIT OF SOUND

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>