


# SOLID 4

4 channel class AB power amplifier


- 2,3 or 4 channel amplifier
- Remote control
- Stable into 2 Ohms (4 x 100W)
- Pseudo-balanced RCA input
- Auto power



## THD / Power

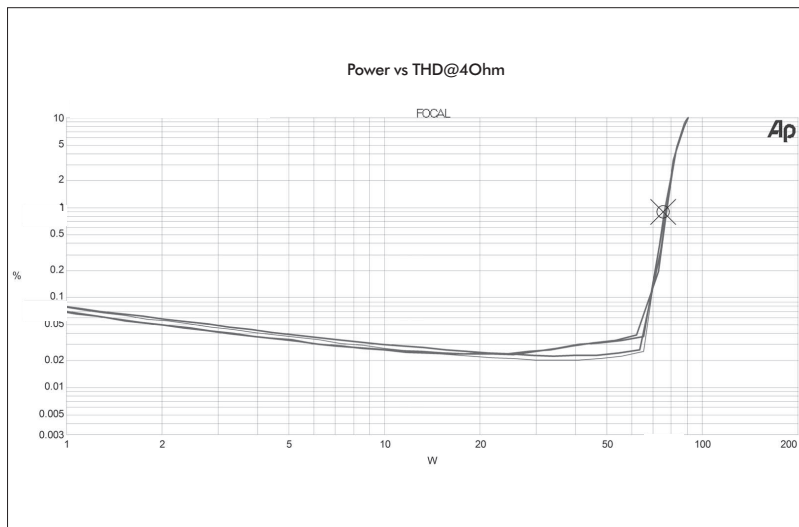

## Mechanical Drawing

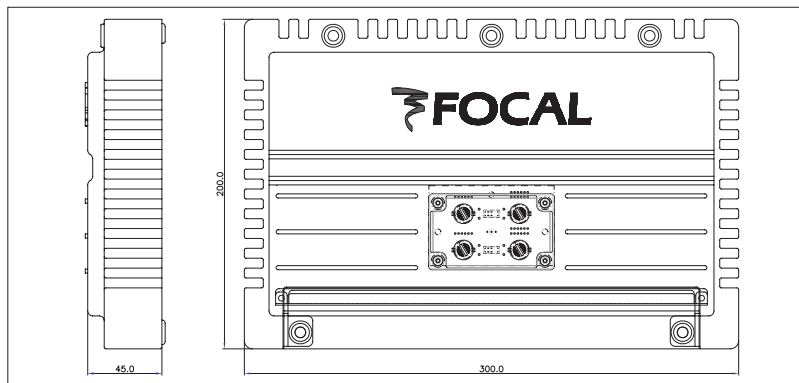


## Preliminary specifications

### Specifications

Nominal power measured at 14.4V continuously @ 4Ω	4 x 75W
Nominal power measured at 14.4V continuously @ 2Ω	4 x 100W
Power in bridge mode measured at 14.4V continuously @ 4Ω	2 x 200W
Signal/noise ratio	> 80dB (A)
Damping factor at 4Ω	50 to 1kHz
Frequency response (-1dB)	10 Hz – 60kHz
Input impedance	20kΩ
Input sensitivity	0.2 – 5V
Input sensitivity high level	0.4 - 9Vrms
High-pass crossover (1/2 and 3/4 channels)	50 – 150Hz (12 dB/oct.)
Low-pass crossover (sub channel)	50 – 150Hz (12 dB/oct.)
Remote control (sub channel)	YES
Adjustable bass boost level	-
Variable phase (SUB)	-
Subsonic filter	-
Maximum cross section of loudspeaker cables	10mm <sup>2</sup> 7 AWG
Maximum cross section of power cables	35mm <sup>2</sup> 2 AWG
Protections	Short-circuit Thermal overload Overvoltage Polarity reversal
Dimensions (HxWxD)	1 3/4 x 11 13/16 x 7 7/8" (45 x 300 x 200mm)

Focal® is a trademark of Focal-JMLab® - BP 374 - 108, rue de l'Avenir - 42353 La Talaudière cedex France - Tél. (33) 04 77 43 57 00 - Fax (33) 04 77 37 65 87 - www.focal-fr.com - SCBD081505/1

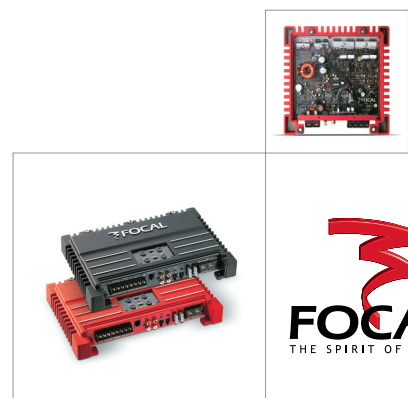

**FOCAL**  
THE SPIRIT OF SOUND

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>