







New

FinePix 2600Zoom



Hot Performance with a Cool Easy to-Use Design!

he FinePix 2600 Zoom is a sleek, easy to use, high-performance, affordable digital camera designed to let you 'point-and-shoot'. Its small size makes it a perfect fit for your pocket and the palm of your hand. Since it is ready to shoot right after switching on the camera, vou won't miss out on any chances. Its 2.0-megapixel CCD, precision 3X optical zoom lens and multitude of functions capture your special moments.





Enjoyable Playback Function

The FinePix 2600 Zoom's 1.8-inch color LCD

makes picture-taking easier and more enjoyable,

allowing you to view pictures or movies immedi-

ately after taking them. The FinePix 2600 Zoom

offers some impressive image playback options;

in addition to Single Frame Playback, the 5X

Multi-Frame Playback displays nine different

images simultaneously on the screen.

Easy Connection with PCs

Zoom Playback brings out fine details and the

2.0-megapixel CCD

With its 2.0 million square pixels*, the 1/2.7-inch CCD delivers high resolution (1600 x 1200 pixels) for sharper and more lifelike images. The CCD offers a high S/N ratio that makes subjects look smooth and natural.

* Total number of pixels: 2.11 million pixels

High-performance Zooming



The FinePix 2600 Zoom sports a highperformance Fuiinon optical zoom lens that delivers the equivalent of a 38 – 114mm range on a 35mm camera.

Its precise auto-focus system assures sharp, focused images in an instant. The FinePix 2600 Zoom also offers digital zoom enlarging up to 2.5x (in 640 × 480 pixel mode). Combined with the 3x optical zoom, this gives a total magnification effect of 7.5x, making it easier to take the shots you want with the detail you need.

Easy to Use





The FinePix 2600 Zoom comes with two AA Ni-MH batteries, a battery

charger and a 16MB SmartMedia™ card so you can start taking pictures right away. This camera makes it easy to take great-looking pictures simply by pressing the shutter button. Fully automatic operation controls all parameters for shooting quality pictures; the auto focus function provides sharp images, auto exposure automatically selects the optimum aperture and shutter speeds, intelligent auto white balance detects the type of lighting and adjusts accordingly, while full flash modes are provided including red-eye reduction. For extremely close-up shots, the Macro Mode lets you move in as close as 10cm.


Video Clip Capability



The FinePix 2600 Zoom has a movie recording feature*. Now you can capture all the fun in up to 20 seconds of video.

Wide







FinePix 2600 Zoom

3X Zoom



114mm 3X optical zoom setting

Actual Size

Digital Zoom

Fine mode, 1600×1200 pixels,

1/350 sec, f/3.4, ISO 100 equivalent



285mm

3X optical zoom setting (640 × 480 pixels)

Digital 2.5 X Zoom Mode with



The USB connection and the included FinePixViewer software make it easy to download picture or movie files to your PC for viewing the images. Connecting the

camera to the PC causes the software to automatically start up. The FinePixViewer also lets you connect to Fujifilm's Internet

services*, while the included "PictureHello**" utility software turns the FinePix 2600 Zoom into a Webcam.

- * The contents of this service will differ depe ing on the country in which you live.
- * PictureHello can be used between certain types of FinePix cameras


with PC camera functions



Low Power Consumption

The FinePix 2600 Zoom utilizes two Ni-MH (Nickel Metal Hydride) AA batteries. Reflecting a thorough reassessment of power consumption efficiency, the FinePix 2600 Zoom is capable of taking a maximum of 300 shots in standard usage* or approx. 6,000 shots in succession** when the provided batteries are fully charged.

- When the LCD monitor is set to "Off", taking shots in 1M Normal mode at 30 second intervals, half of them with the flash set to "Off".
- When shooting successively for 3 hours in VGA mode with the LCD monitor and flash set to "Off".







All focal distances shown above are 35mm camera equivalent.

FUNCTIONS





SPECIFICATIONS

DIGITAL CAME	RA FinePix 20	600 ZOOM			
CCD sensor	1/2.7-inch square pixel CCD with RGB filter				
	(Total number of pixels: 2.11 million pixels)				
Number of effective					
pixels	•				
Image file size	1600 × 1200 /1280 × 960 / 640 × 480 pixels				
File format	Still image: JPEG (Exif Ver 2.1)				
	Movie: AVI (Motion JPEG)				
	* Design rule for Camera File system compliant/DPOF-compatible				
Storage media	SmartMedia TM Cards (3.3V, 2 – 128MB)				
Number of images					
Modes	Still ($1600 \times 1200 \text{ pixels}$)		Movie		
Image quality modes	Fine	Normal	Basic		
MG-4S	4	9	19	23 sec.	
MG-8S	10	19	39	47 sec.	
MG-16S/SW	20	39	75 152	94 sec.	
MG-32S/SW	41 82	79	152	191 sec.	
MG-64S/SW MG-128SW	166	159 319	306 613	385 sec. 774 sec.	
1410-120544			010		
Lens	The data sizes and numbers of available shots will vary slightly depending on the type of s Fujinon optical 3X zoom lens (Equivalent to 38 – 114mm on a 35mm camera)				
2010					
Focal distance	Normal: Approx. 0.8m/2.6ft. to infinity				
	Macro: Approx.				
Aperture	F3.5/F8.7				
Viewfinder	Real-image optical viewfinder				
Exposure control	64-zone TTL metering, Program AE				
•	(Exposure comp	ensation in the M	Ianual mode)		
Sensitivity	Equivalent to ISO 100				
Shutter speeds	1/2 to 1/1,000 sec. (combined with mechanical shutter)				
White balance	Automatic Manual [Fine, Shade, Fluorescent light (Daylight),				
	Fluorescent light (Warm white), Fluorescent light (Cool white),				
	Incandescent lig				
Flash	Auto flash using flash control sensor				
	Flash mode: Auto, Red-eye Reduction, Forced Flas			l Flash,	
	Suppressed Flash, Slow Syncro				
	Effective range: Wide Approx. $0.2 - 3.0 \text{m}/0.7 - 9.8 \text{ft}$				
	Telephoto Approx. 0.8 – 3.0m/2.6 – 9.8ft				
LCD monitor	1.8-inch D-TFD (72,000 pixels)				
Interface	USB				
Power source	2 AA-size Ni-MH rechargeable batteries				

Other Functions

Dimensions

Weight

Digital zoom	$2.5 \times (640 \times 480 \text{ mode}), 1.25 \times (1280 \times 960 \text{ mode})$
Movie recording	320×240 pixels, 10 frames/sec, up to 20 sec, without sound
Playback	Single Frame (with max. 5X Playback Zoom)/9 Multi-frame
Internet-conferencing	Webcam function with "PictureHello"
Others	POWER SAVE mode, Self-timer, DPOF
Accessories	16MB SmartMedia™ card
included	2. A A-size Ni-MH batteries

Approx. 200g/ 7.0oz (excluding batteries)

AC power adapter (optional)


Battery charger Hand strap USB cable CD-ROM • USB driver • FinePixViewer • DP Editor

• Apple QuickTime 4.0 • VideoImpression

Specifications are subject to change without notice.

(Alkaline batteries are not recommended.) 99.8 (W) \times 65.0 (H) \times 53.9 (D) mm/3.9 (W) \times 2.6 (H) \times 2.1 (D) in.

SYSTEM CONFIGURATION

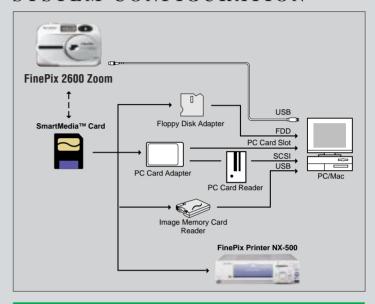

OPTIONAL ACCESSORIES



Image Memory Card MG-4S **MG-8S** MG-16S/SW MG-32S/SW MG-64S/SW MG-128SW



AC Power Adapter AC-3V



Floppy Disk Adapter FD-A2



Battery Charger with Battery BK-NH

- Charged in approx.
 2 hours,
- With Euro type or UK type plug



PC Card Adapter PC-AD3



Rechargeable Battery 2HR-3UF

• 2 × AA-type Ni-MH



Image Memory Card Reader SM-R2



Soft Case SC-FX26

Apple is a registered trademark of Apple Computer Inc. QuickTime is a trademark of Apple Computer Inc. All other trademarks are the property of their respective holders.

For more information on the full range of Fujifilm digital products, please visit our Website: **http://www.fujifilm.co.uk**



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com