

SPB-8/8E

Stereo Pedal Board

RIGHT

FURMAN
SOUND, LLC


FEATURES

- ⊙ The Pedal Board is a solid, non-slip base for up to 8 pedal effects that lets you leave everything powered up and patched together as you like it
- ⊙ Pedal effects attach securely to a 12" x 25" Velcro™ pad
- ⊙ Included padded travel case is sturdy and roomy, fits the Pedal Board with all effects attached, has two internal storage pouches, and includes a shoulder strap
- ⊙ Stereo effects return, effects loop, and amplifier outputs
- ⊙ Eight 9VDC outlets, with 8 included power cords
- ⊙ Three widely spaced 120VAC, 15A outlets allow enough room for "wall warts"
- ⊙ Furman's quality spike and surge suppression and EMI/RFI filtering assures clean power
- ⊙ Toroidal transformer for ultra low-noise performance
- ⊙ Rugged construction will withstand years of on-stage use and abuse
- ⊙ Extra-long 10-foot AC cord

The first Pedal Board designed with the working professional in mind. Guitar players, bassists, and keyboard players have all asked for this, and we answered with the most rugged, versatile, and useful board available anywhere.


DESCRIPTION

The Furman SPB-8 features heavy duty metal construction that will handle the most forceful stomps you can offer, as well as stand up to the rigors of the road. The first stereo board on the market, it is also the first to feature the high level of power conditioning that Furman is famous for.

At the heart of the SPB-8 Stereo Pedal Board is a light yet rugged polycarbonate platform in combination with a steel chassis and an ample 12" x 24" Velcro™ sheet, ensuring secure, noiseless, flex free, non-slip performance for up to eight effects boxes and pedals.

The SPB-8's stereo patch bay contains ten 1/4" switching phone jacks, connected in two stereo loops. This allows a single guitar or instrument input to feed multiple mono and stereo effects boxes, send and return from remote effects, and feed up to two amplifiers simultaneously. From modest to highly complex patching demands, the SPB-8 allows nearly unlimited set-up flexibility.

SPB-8/8E Patch Bay

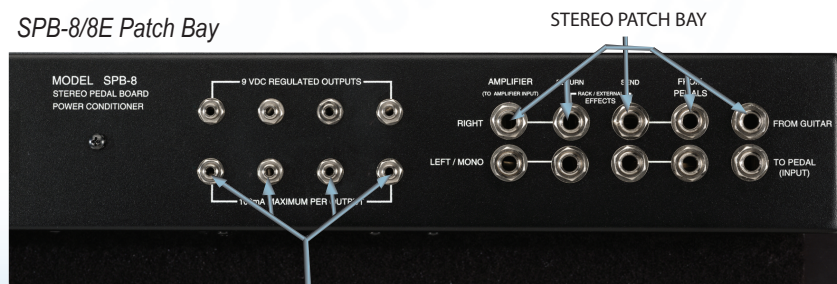


9 VDC REGULATED OUTLETS
FOR PEDALS, 100mA MAXIMUM
PER OUTPUT



Powering your pedals, amps and other gear, the SPB-8 offers two levels of surge and short circuit protection, as well as RF and EMI filtering. Furman's SPB-8 is quiet, powering both AC and DC pedals without hum, due to the high quality toroidal transformer employed. Each DC output is rated at 100 mA, as well as being individually protected against shorts — guaranteeing that if one pedal goes out, the rest are protected and continue to function.

The SPB-8 makes pack-up simple and convenient. Unpatching several effects boxes and pedals is no longer required, since the large Velcro sheet and included mating strips firmly secures all of your pedals in place. A sturdy, padded case is included and comes with a shoulder strap and zippered pouches for storing cables, wall warts, and AC cords.

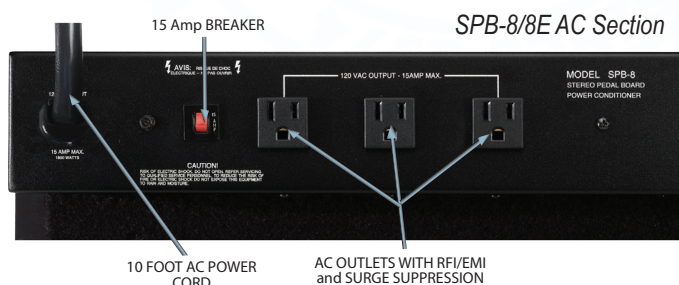

THREE YEAR LIMITED WARRANTY

The Furman PL-8 and PL-PLUS are protected by a limited three-year warranty covering defects in materials and workmanship.

OPTION

- **Model SPB-8 E:** "E" suffix versions are for use in countries with 220/240 volt AC lines.

SPB-8/8E SPECIFICATIONS

POWER CONDITIONING

Current Rating:	15 Amps total AC outlets (10 Amps "E" version)
Spike Protection:	Line to Neutral
Spike Clamping Voltage:	Initial turn-on at 200 Volts; TVSS rating of 400 Volts peak at 500 Amps ("E" version initial turn-on is 390 Volts peak)
Response Time:	1 nanosecond
Maximum Surge Current:	6,500 Amps
Maximum Spike Energy:	80 Joules ("E" version 130 Joules)
Noise Attenuation:	Transverse mode - greater than 20 dB, 800 kHz to 10 MHz

9 VDC SUPPLY

Current Rating:	100 mA per outlet, 1A maximum combined current for all outlets
Protection:	(8) discrete PTC automatically resettable fuses.
Fuse trip time:	0.2 second for 1 amp fault
9 VDC Patch Cords:	(8) 3.5mm miniplug (tip hot) to P205L 2.1mm x 5mm "DC connector" (sleeve hot) (1) 3.5mm miniplug (tip hot) to 3.5mm miniplug (tip hot) (1) 3.5mm miniplug (tip hot) to 9 Volt battery clip (non-perforated clip hot)

GENERAL

Weight SPB-8 unit:	11 lbs. (5 kg)
Travel Bag:	2.4 lbs. (1.1 kg)
Dimensions SPB-8 unit:	3.9" H x 26" W x 17.5" D (10 x 66 x 44.5 cm)
Travel Bag:	5.5" x 27.5" x 19" (14 x 70 x 48 cm)

Safety Agency Listings: CE and CSA / NRTL

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>