

FURUNO

MF/HF

MF/HF Radiotelephone

**Models:****FS-1575 (150 W)****FS-2575 (250 W)****FS-5075 (500 W)**www.furuno.com

Reliable MF/HF Radiotelephone for general and distress communications with integrated DSC/DSC Watch Receiver




Models: FS-1575 (150 W)
FS-2575 (250 W)
FS-5075 (500 W)


- MF/HF radiotelephone with DSC facility
- Fully meets GMDSS carriage requirements for SOLAS ships operating in A2, A3 and A4 sea areas
- Meets the new ITU recommendation on digital selective calling system for use in the Maritime Mobile Service, ITU-R M.493-13
- High-contrast 4.3" bright color LCD (480x272 pixels)
- Capable of distress, safety and routine communication
- Instant selection of 256 user-specified channels with a rotary knob or direct keypad input
- Quick access to DSC message composition by dedicated keys on the control unit
- Full-duplex kit available (optional supply for the FS-5075 only)
- Quick access to dedicated functions in the menu operation using numeric keypad

High-contrast 4.3" bright color LCD Display Modes

Radiotelephone display

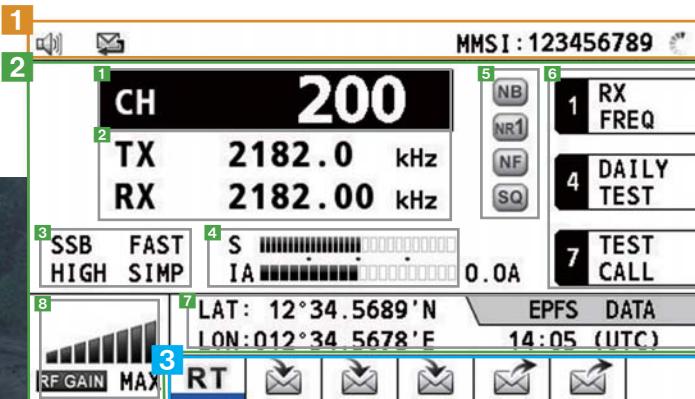

DSC SCAN display

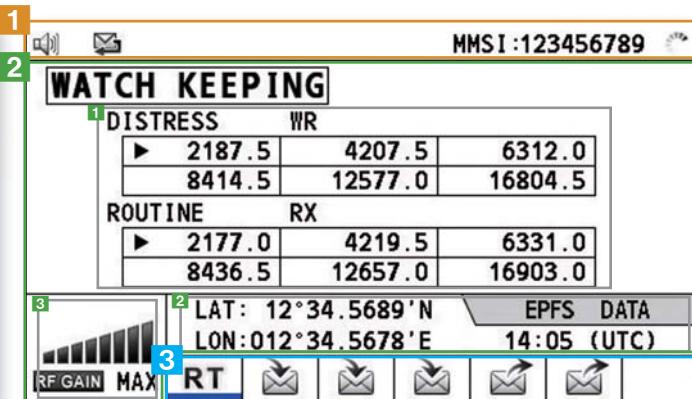

1 Status segment

Indicating the status of equipment, i.e., speaker ON/OFF, unread DSC message in the inbox, hardware error, etc. Also, MMSI is shown in radiotelephone and DSC scan displays.

2 Information segment

Displaying:

- 1 user channel selected
- 2 operating frequencies
- 3 class of emission, AGC, output power and communication mode
- 4 signal strength, meter reading (IC, VC, RF, VS and IA (antenna current))
- 5 currently activated functions, i.e., noise blunker, etc.
- 6 short-cut functions assigned for 1, 4 and 7 on the numeric keypad
- 7 own ship L/L, Time
- 8 indications of RF input attenuator ON/OFF as well as RF gain

2 Information segment

Displaying:

- 1 DSC watch frequencies (both distress and routine)
- 2 own ship L/L, Time
- 3 indications of RF input attenuator ON/OFF as well as RF gain



3 Tab segment

Up to 7 active procedures can be displayed in this segment. The procedures are for operating: radiotelephone, distress alert transmission, general DSC message transmission and general DSC message reception.


Quick-access functions




On the menu setting, three quick-access functions can be assigned for 1, 4 and 7 on the numeric keypad, and those assigned functions are displayed on the Radiotelephone display. The list of functions assigned for quick-access includes: TX frequency setting, RX frequency setting, class of emission setting, AGC setting, output power setting, TX frequency monitoring, showing the list of test messages, showing the list of message files, execution of daily test, showing the list of log files, and intercom functions.



DSC display

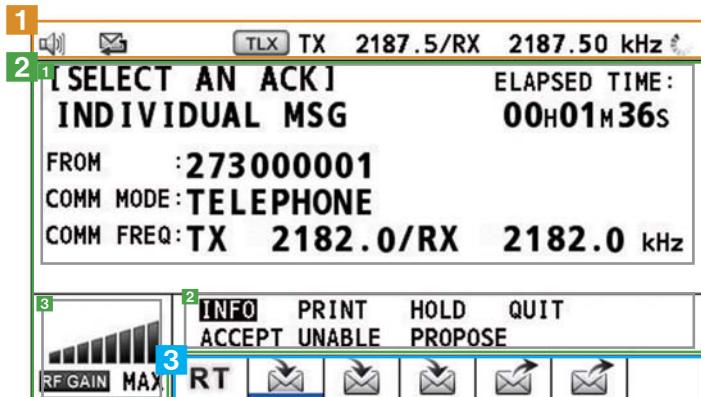

Menu display

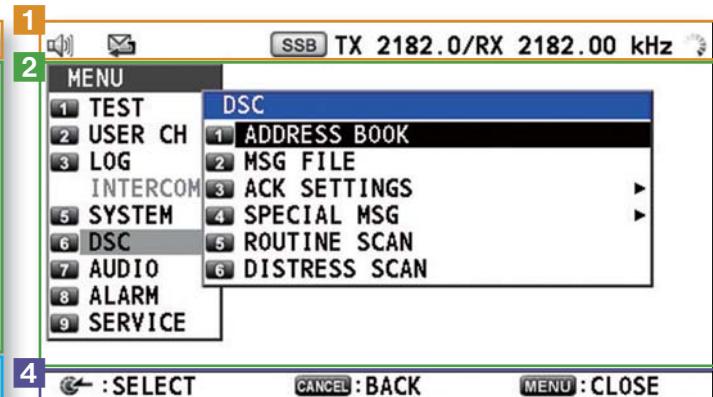

1 Status segment

Indicating status of equipment, i.e., speaker ON/OFF, unread DSC message in the inbox, hardware error, etc., TX/RX frequencies/class of emission for successive communication.

2 Information segment

Displaying:


- 1 DSC contents, status and information
- 2 a list of available operator actions
- 3 indications of RF input attenuator ON/OFF as well as RF gain

2 Information segment

Displaying menu tree

4 Guide segment

Guide to short-cut key functions is displayed.

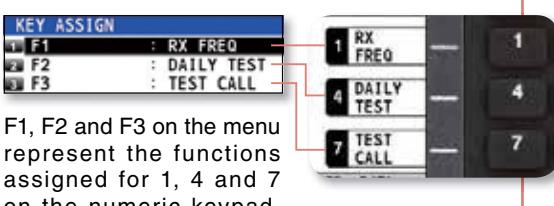

Press 1



Night Mode

Night mode is selectable for wheelhouse operation.


Control Panel



1 Volume/Power knob :	Sound volume control/Switching of Power ON/OFF
2 RF GAIN knob :	Adjustment of reception gain
PUSH TO ATT :	Press to activate/deactivate RF attenuator
3 DISTRESS :	Long-press to transmit a DSC distress alert
4 DISTRESS MSG :	Composition of DSC message for distress alert
OTHER DSC MSG :	Composition of DSC message except for distress alert and DROBOSE (DSC relay on behalf of someone else*)
Press DISTRESS MSG + OTHER DSC MSG :	Composition of DSC message for DROBOSE
5 BRILL :	Activation of the brilliance control dialog box
TAB :	Activation of tab segment control on the screen
MENU :	Opening/closing of the menu dialog box
CANCEL :	Deactivates alarm/deletion of error and pop-up messages/halting of DSC message composition/exiting from the message composition dialog box/distress cancellation/returning to a previous menu level
6 :	Switching the speaker ON/OFF
6 PUSH TO ENTER knob :	Shifts the selector and pointer/adjusts the degree of parameter, i.e., brilliance and switch over the display mode
	Press to confirm the entered values
7 SCAN :	Switches to the DSC SCAN mode/if pressed during the DSC SCAN mode, routine scan will be halted
2182 :	Sets to 2182 kHz SSB
RT/CH :	Switches to radiotelephone mode, and if pressed in radiotelephone mode, channel setting box will be summoned
1 :	Used to enter the following number and symbols (. @ - _ : 1) as well as quick access to short cut function
2 NB :	Used to enter A, B, C and 2, and to switch noise blanker setting ON/OFF
3 SQ :	Used to enter D, E, F and 3, and to switch squelch setting ON/OFF
4 :	Used to enter G, H, I and 4 as well as quick access to short cut function
5 NR :	Used to enter J, K, L and 5, and to switch noise reduction setting ON/OFF
6 :	Used to enter M, N, O and 6
7 :	Used to enter P, Q, R, S and 7 as well as quick access to short cut function
8 NF :	Used to enter T, U, V and 8, and to switch notch filter ON/OFF
9 :	Used to enter W, X, Y, Z and 9
◀ :	Used to reduce the receiver volume of the handset/to shift the pointer in channel/frequency selection dialog box
0 TUNE :	Used to enter the number "0", space and the following symbols (! # \$ % & ' () * + - . / ; < = > ? @ [\] ^ - { } ~)/ to tune impedance between an antenna and a transceiver
▶ :	Used to raise the receiver volume of the handset/to shift the pointer in channel/frequency selection dialog box

Simplified menu operation

Numbers are assigned for each of the menu items, and the operator can access each of the menu items either by turning and pressing PUSH TO ENTER knob to select menu items or simply pressing number on the numeric keypad.

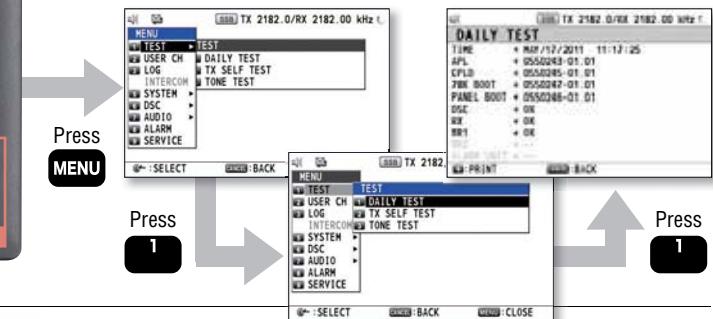

S P E C I F I C A T I O N S

MODEL PRODUCT NAME	FS-1575	FS-2575	FS-5075
GENERAL CHARACTERISTICS			
Rules and Regulations	ITU-R M.1082-1, ITU-R M.1173, ITU-R M.476-5, ITU-R M.490, ITU-R M.491-1, ITU-R M.492-6, ITU-R M.493-13, ITU-R M.541-9, ITU-R M.625-3, ITU-R M.821-1, IMO Res. A.694(17), IMO Res. A.806(19), IMO Res. MSC.36 (63), IMO Res. MSC.68 (68), MSC/Circ. 862, IEC 61162-1 Ed. 4, IEC 60945 Ed. 4, ETS 300 067 ed. 1, EN 300 338-1 V1.3.1, EN 300 338-2 V1.3.1, EN 301 033 V1.3.1, EN 300 373-1 V1.3.1		
Frequency Range TX:	1605.0kHz to 27500.0kHz		
RX:	100kHz to 29999.99kHz		
Number of Channels	256 user-specified channels plus ITU, SSB/TELEX channels		
Communication Mode	Simplex/Semi-duplex	Simplex/Semi-duplex/Duplex (option)	
Class of Emission	J3E, H3E, A1A, J2B		

TRANSEIVER

RF Output Power	150 W pep	250 W pep	500 W pep (HF) / 400 W pep (MF)
Antenna	10-18 m whip or wire		
Tuning Speed	within 15 sec		
Receiver Sensitivity	less than +7 dBμV (4.0-29.99999 MHz, J3E) / less than +13 dBμV (1.6-4 MHz, J3E)		

DSC

Receiving Frequency	General	All DSC frequencies in MF/HF	
	Distress and safety	DSC distress/safety frequencies: 2187.5 kHz, 4207.5 kHz, 6312.0 kHz, 8414.5 kHz, 12577.0 kHz, 16804.5 kHz	
Message Storage	TX:	50 distress messages, plus 50 non-distress messages	
	RX:	50 messages, telephone no., frequencies, etc.	


POWER SUPPLY

24 VDC, 100/110/120/200/220/240 VAC with optional AC/DC Power Supply PR-850A (FS-2575/5075) / PR-300 (FS-1575)		
20 A (TX), 5.0 A (RX)	40 A (TX), 5.0 A (RX)	60 A (TX), 5.0 A (RX)

EQUIPMENT LIST


Standard	1 Transceiver Unit	FS-1575T (FS-1575), FS-2575T (FS-2575), FS-5075T (FS-5075)	1 Unit
	2 Control Unit	FS-2575C	1 Unit
	3 Handset	HS-2003	1 Unit
	4 Antenna Coupler	AT-5075 (FS-2575/5075) AT-1575 (FS-1575)	1 Unit
Option	1 Printer	PP-520	
	2 Printer Interface	IF-8500	
	3 External Speaker	SEM-21Q	
	4 Control Unit	FS-2575C	
	5 NBDP Terminal Unit	IB-585	
	6 BK Interface	BK-300	
	7 Whip Antenna		
	8 AC/DC Power Supply	PR-850A (FS-2575/5075) PR-300 (FS-1575)	
	9 Full Duplex Kit (for FS-5075)	OP05-125	
	10 Matching Box	ARD-1	
	11 Preamp	FAX-5	
	12 WR2 kit	OP05-123	

INTERCONNECTION DIAGRAM

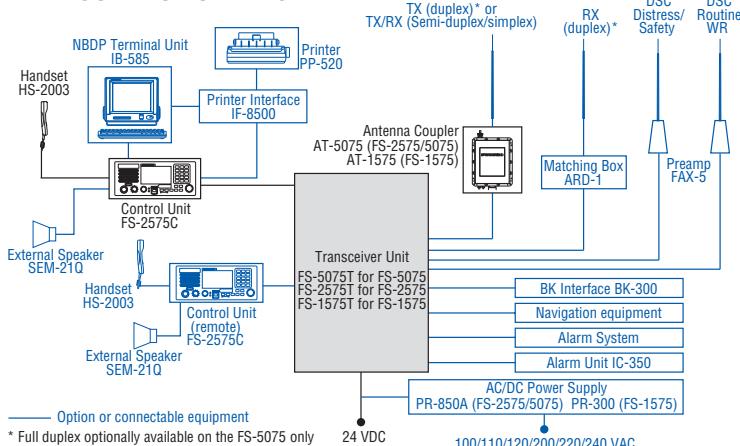


CONTROL UNIT

AT-2575C



AT-5075

AT-1575




ANTENNA COUPLER

AT-5075

AT-1575

AT-1575


AT-5075



TRANSCEIVER UNIT


FS-5075T

27 kg
59.5 lb




FS-2575T

20 kg
44.1 lb



FS-1575T


16 kg
35.3 lb



HANDSET

HS-2003

0.5 kg
1.2 lb



All brand and product names are registered trademarks, trademarks or service marks of their respective holders.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD. Nishinomiya, Hyogo, Japan
www.furuno.com

FURUNO U.S.A., INC. Camas, Washington, U.S.A.
www.furonusa.com

FURUNO (UK) LIMITED Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO NORGE A/S Ålesund, Norway
www.furuno.no

FURUNO DANMARK A/S Hvidovre, Denmark
www.furuno.dk

FURUNO SVERIGE AB Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY Espoo, Finland
www.furuno.fi

FURUNO POLSKA Sp. Z o.o. Gdynia, Poland
www.furuno.pl

FURUNO DEUTSCHLAND GmbH Rellingen, Germany
www.furuno.de

FURUNO FRANCE S.A.S. Bordeaux-Mérignac, France
www.furuno.fr

FURUNO ESPAÑA S.A. Madrid, Spain
www.furuno.es

FURUNO ITALIA S.r.l. Genoa, Italy
www.furuno.it

FURUNO HELLAS S.A. Glyfada, Greece
www.furuno.gr

FURUNO (CYPRUS) LTD Limassol, Cyprus
www.furuno.com.cy

FURUNO EURUS LLC St. Petersburg, Russian Federation
www.furuno.ru

FURUNO SHANGHAI CO., LTD. Shanghai, China
www.furuno.com.cn

FURUNO KOREA CO., LTD. Busan, Korea
RICO (PTE) LTD
Singapore
www.rico.com.sg

14073SK Printed in Japan
Catalogue No. S-025b

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>