



Item: \_\_\_\_\_  
Quantity: \_\_\_\_\_  
Project: \_\_\_\_\_  
Approval: \_\_\_\_\_  
Date: \_\_\_\_\_

# Induction Green Heat

## Garland Induction Counter Unit 2.5kW

Models:

- GI-SH/BA 2500



### Induction Benefits:

- Energy Efficient
- Fast Heat
- Precise Cooking
- Easy To Clean
- No Pan, No Heat.
- Cool Operations
- Boil Dry Protection

### Standard Features:

- Compact table top design with stainless steel body and high impact ceramic glass top.
- Sloped, easy to see front panel with adjustable control for easy operation.
- Integral cooling fan keeps electronics cool, discharging from rear with protective air deflectors preventing hot exhaust to be pulled back into unit .
- Removable, reusable easy to clean air intake filter.
- 6' (1829mm) cord and plug supplied (60 cycle units only).
- "Flat Design", compact high performance electronics allow for low unit heights.
- Instant energy transmission to the pan.
- Thermostatically controlled overheat sensor shuts the unit off to prevent damage from pans cooking dry.
- Induction technology transfers heat to the pan, not to the surrounding air, allowing for cool operation.
- Innovated new technology for pan detection; RTCS is an internal control software development matching speed, capability and performance.  
R – Real Time  
T – Temperature  
C – Control  
S – System
- Electronic output limitation continually monitors the energy transfer to the pan, helping to ensure the most efficient energy transfer possible.

### Specifications:

Shall be a Garland Induction Unit model GI-SH/BA 2500 with a total kW rating of 2.5 kW. Built with a robust stainless steel casting with a Ceran glass work top. Compact powerful electronic system for years of reliable service. Overheat sensors prevent damage of the unit if pan is run dry. Easy to operate rotary switch with 1 to 12 scale. Units to come in 208V or 240V power (specify at the time of order) with integral cord and plug for North America.

Note: Induction cooking requires "Induction Ready" pans to operate.



Intertek



Intertek




CE models comply with the latest European Norms: EN 60335-1, EN 60335-2-36, EN 62233 (EMC/EMV)

North American models:  
ETL listed in compliance with  
UL 197, CSA C22.2 No.109, NSF-4  
Complies with FCC part 18, ICES-001

Garland Commercial Ranges Ltd.  
1177 Kamato Road,  
Mississauga, Ontario  
L4W 1X4 CANADA

General Inquiries 1-905-624-0260  
USA Sales, Parts and Service 1-800-424-2411  
Canadian Sales 1-888-442-7526  
Canada or USA Parts/Service 1-800-427-6668



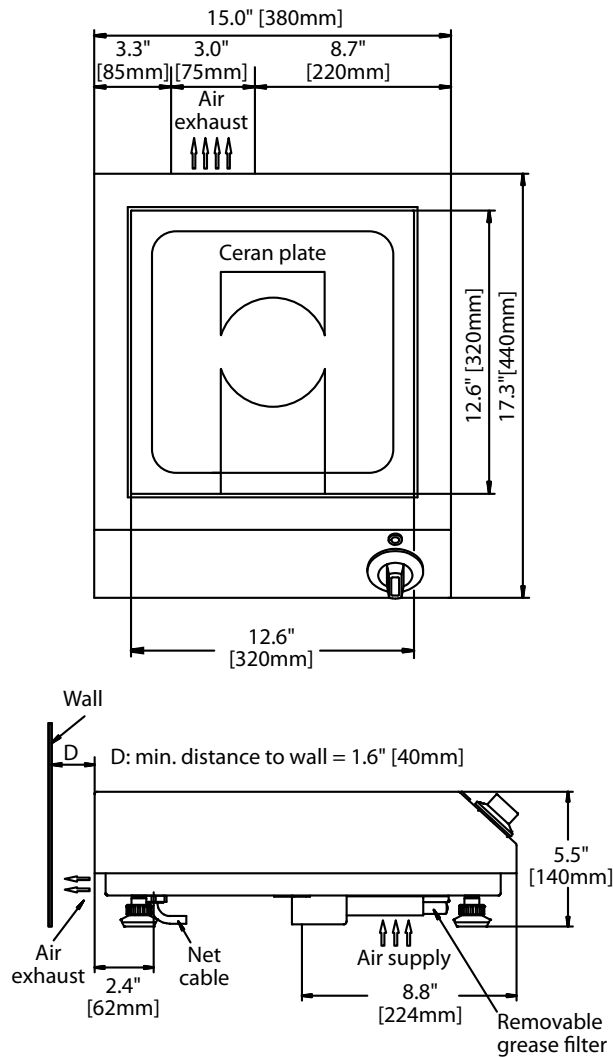

Electrical Loading				
Model	Watts	208/60/1	240/60/1	230/50/1
GI-SH/BA 2500	2500	12 amp	11 amp	12 amp

Plug Configurations		
Model	Electrical Characteristics	Plug
GI-SH/BA 2500	208V/60Hz/1Ø 240V/60Hz/1Ø	 NEMA 6-15P
	230V/50Hz/1Ø	 EU1-16P

Garland/U.S. Range products are not approved or authorized for home or residential use, but are intended for commercial applications only. Garland / U.S. Range will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

Form# GI-SH/BA 2500 (12/12/13)

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>