

GXM 40

XM[®] Radio Smart Antenna



© 2008 Garmin Ltd. or its subsidiaries

Garmin International, Inc.
1200 East 151st Street,
Olathe, Kansas 66062, USA
Tel. (913) 397.8200 or (800) 800.1020
Fax (913) 397.8282

Garmin (Europe) Ltd.
Liberty House
Hounslow Business Park,
Southampton, Hampshire, SO40 9RB UK
Tel. +44 (0) 870.8501241 (outside the UK)
0808 2380000 (within the UK)
Fax +44 (0) 870.8501251

Garmin Corporation
No. 68, Jangshu 2nd Road,
Shijr, Taipei County, Taiwan
Tel. 886/2.2642.9199
Fax 886/2.2642.9099

All rights reserved. Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express prior written consent of Garmin. Garmin hereby grants permission to download a single copy of this manual onto a hard drive or other electronic storage medium to be viewed and to print one copy of this manual or of any revision hereto, provided that such electronic or printed copy of this manual must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Information in this document is subject to change without notice. Garmin reserves the right to change or improve its products and to make changes in the content without obligation to notify any person or organization of such changes or improvements. Visit the Garmin Web site (www.garmin.com) for current updates and supplemental information concerning the use and operation of this and other Garmin products.

Garmin® is a registered trademarks of Garmin Ltd. or its subsidiaries, registered in the USA and other countries, and may not be used without the express permission of Garmin. XM® and XM WX® are a registered trademarks of XM Satellite Radio Inc.

July 2008

Part Number 190-00942-00 Rev. A




Printed in Taiwan

Introduction

The GXM 40 XM Radio Smart Antenna provides marine and aviation XM WX® Weather information for viewing on your Garmin® unit. Operating the GXM 40 requires a subscription to the XM WX Satellite Weather service. The GXM 40 also offers music, news, and talk programming with a subscription to the XM Radio service. XM subscriptions are sold separately.

This manual covers the XM WX Weather and XM Radio features of the GXM 40 when viewed on a Garmin unit. To get the most out of your new system, take the time to go through this manual and the Owner's Manual for your unit. This manual discusses how to connect the GXM 40 and how to subscribe to XM WX Weather and XM Radio services, and provides detailed information about weather and audio features. Operational procedures are found in the Owner's Manual for your unit.

Manual Conventions

- This manual refers to the GXM 40 XM Radio Smart Antenna as the GXM 40.
- All Garmin products that are compatible with the GXM 40 are referred to as “Garmin unit” throughout this manual.
- The gray tabs on the edge of each page indicate the types of Garmin units for which each XM product is available:  for aviation units,  for marine units, and  for automotive units.

Product Registration

Help us better support you by completing our online registration today! Connect to our Web site at <http://my.garmin.com>. Keep the original sales receipt, or a photocopy, in a safe place.

Serial Number for the GXM 40

Use the line below to record the serial number in case it is lost, is stolen, or needs service. The serial number is located on the bottom of your unit. Keep your original sales receipt in a safe place or attach a photocopy inside the manual.

Serial Number:

Warnings



WARNING: When installing the GXM 40 in a vehicle, place the unit securely so that it does not interfere with vehicle operating controls or obstruct the driver's view (see diagram).

Do not mount where driver's field of vision is blocked.



Do not mount in front of an airbag field of deployment.

Do not place unsecured on the vehicle dashboard.



WARNING: When Navigating in an aircraft, use the GXM 40 only as an aid for VFR navigation.



WARNING: Use the GXM 40 only as a navigational aid. Do not attempt to use the GXM 40 for any purpose requiring precise measurement of direction, distance, location, or topography. This product should not be used to determine ground proximity for aircraft navigation.



WARNING: This unit provides the ability to receive weather information through XM data. Use weather data only as an aid to situational awareness. Such weather information is merely supplemental and advisory in nature and is not intended to be relied upon as safety-critical information in connection with any aviation, vehicle, or marine usage. The user should always exercise caution and common sense when confronted with severe weather conditions.



WARNING: XM WX Weather should not be used for hazardous weather penetration. Weather information is approved only for weather avoidance, not penetration.



WARNING: This product, its packaging, and its components contain chemicals known to the State of California to cause cancer, birth defects, or reproductive harm. This Notice is provided in accordance with California's Proposition 65. See www.garmin.com/prop65 for more information.

Table of Contents

Introduction.....	1	Freezing Level.....	22
Manual Conventions.....	1	Forecast	22
Product Registration.....	1	Fronts	23
Warnings	2	Hurricanes	24
Getting Started.....	5	County Warnings	25
Connecting the GXM 40 to a Garmin Unit.....	6	XM Radio.....	26
Subscribing to XM Services	7	Visibility.....	27
XM WX Weather Features	8	Water Temperature	28
Displaying Weather Information	8	Wave Period	28
METAR	9	Wave Direction	29
AIRMET	10	Wave Height	29
SIGMET.....	11	Marine Warnings	30
TFR	12	Buoy Reports.....	31
TAF	13	Appendix	32
Winds	14	GXM 40 Specifications	32
NEXRAD Radar.....	16	Feature Broadcast Rates	33
Satellite Mosaic	17	NEXRAD Overview	34
Echo Tops.....	18	FCC Compliance	36
Surface Pressure.....	19	Limited Warranty	36
Lightning.....	20	Software License Agreement	39
Storm Cells.....	21	XM Satellite Radio Service Agreement	39
		TFR Data.....	42
		Index	43

Getting Started

Unit Care

Cleaning – The case for the unit is constructed of high-quality material and does not require user maintenance other than cleaning. Clean the unit housing using a lightly-dampened cloth with a mild detergent solution and then wipe it dry. Avoid chemical cleaners and solvents that may damage plastic components. Do not apply cleaner to the electrical contacts on the front of the unit.

Storage – Do not store the GXM 40 where exposure to extreme temperatures may occur, as permanent damage may result.

Servicing Your Unit

The Garmin GXM 40 has no user-serviceable parts. Should you ever encounter a problem with your unit, take it to an authorized Garmin dealer for repairs, or contact Garmin Product Support at 1-800-800-1020.

The GXM 40 is fastened shut with screws. Any attempt to open the case to change or modify the unit in any way voids your warranty and may result in permanent damage to the equipment.

GXM 40 Radio Smart Antenna



USB Connector



Mounting Holes



Connecting the GXM 40 to a Garmin Unit

Position the GXM 40 where it has a clear view of the sky, for example, on the outside of the vehicle or behind the windshield of the vehicle. Connect the GXM 40 to the USB port on the Garmin unit.



Subscribing to XM Services

With the GXM 40 connected to your Garmin unit, contact XM Satellite Radio to activate your XM WX Weather service, your XM Radio service, or both.

Step 1: Check the system setup

Ensure that the GXM 40 is connected to your Garmin unit.

Step 2: Turn on your system

Place the GXM 40 where it has a clear view of the sky and turn on your Garmin unit. This automatically turns on the GXM 40.

Step 3: Set up the XM account

Ensure that your XM WX Weather ID and your XM Radio ID are readily available. Contact XM Satellite Radio by phone at **(800) 985-9200**. After receiving the required information from you, the XM representative activates the account and sends out an XM signal to activate the GXM 40. You can also activate your account by visiting <https://xmro-secure.xmradio.com/listenercare/login2.xm>.

For answers to other XM questions, call the above number or visit www.xmwxweather.com.

Step 4: Confirm all components of your service package

XM WX Weather: Keep your Garmin unit turned on to ensure that you receive the XM signal. The XM signal is being received when the components of the selected service package are displayed in the **Weather Products** list. Do not turn off the Garmin unit until the name of the selected service package is displayed in the **Service Level** field.

XM Radio: Verify that channels 7, 9, 47, and 122 are being received. This indicates that all channels of the XM basic radio service are being received. If the XM WX Weather or the XM Radio service has not activated within an hour, call XM WX customer care at **(800) 985-9200** to verify the activation of your XM services. The customer-care representative can refresh the activation signal or you can do this yourself at www.xmradio.com/refresh by entering your radio ID where requested.

Step 5: Save the service package

After the service package name appears in the **Service Level** field, turn off the Garmin unit.






XM WX Weather Features

Displaying Weather Information

The GXM 40 receives XM WX Weather data and shows it on the Map and Weather pages of the Garmin unit. The weather data for each feature comes from reputable weather data centers such as the National Weather Service and the Hydrometeorological Prediction Center. (See the XM WX Satellite Weather Web site at <http://weather.xmradio.com/weather> for more information.) Any weather feature can change in appearance or interpretation if the source that provides the information changes. XM WX Weather data is broadcast at set rates (see [page 33](#) for all weather-related broadcast rates). For example, NEXRAD Radar data is broadcast at five-minute intervals. When the Garmin unit is turned on or when a new feature is selected, the GXM 40 has to receive new data before it can be displayed. You can experience a delay before weather data or a new feature appears on the map.

METAR

A METAR or METeorological Aeronautical Report is an international code used for reporting weather observations. If METAR data is available for an airport, a color-coded flag is shown next to the airport. To view the METAR data, select the flag with the map pointer.

-  VFR (ceiling greater than 3000 ft. AGL and visibility greater than five miles)
-  Marginal VFR (ceiling 1000–3000 ft. AGL and/or visibility three to five miles)
-  IFR (ceiling 500 to below 1000 ft. AGL and/or visibility one mile to less than three miles)
-  Low IFR (ceiling below 500 ft. AGL or visibility less than one mile)
-  Undetermined



METAR Selected With Map Pointer

**JOHNSON CO EXECUTIVE
OLATHE, KS**

KOJC observation Jun 15 12:53 PM CDT
 Wind from 350° at 8 kt
 Visibility 10 mi
 Sky clear
 Temperature 81°F / Dewpoint 52°F
 Altimeter 30.01"

METAR Detailed Information

AIRMET

An AIRMET or **AIR**man's **MET**eorological Information can potentially affect all aircraft. This data can be especially helpful for pilots of light aircraft that have limited flight capability or instrumentation. An AIRMET must affect or be forecast to affect an area of at least 3,000 square miles at any one time. AIRMETs are routinely issued for six-hour periods and are amended as necessary due to changing weather conditions or the issuance or cancellation of a SIGMET (**SIGN**ificant **MET**eorological Forecast). AIRMETs are displayed as an colored, dashed line.

- AIRMET Sierra (IFR) (purple): Ceilings less than 1,000 feet and/or visibility less than three miles affecting over 50% of the area at one time. Extensive mountain obscuration.
- AIRMET Tango (Turbulence) (orange): Moderate turbulence. Sustained surface winds of 30 knots or more at the surface.
- AIRMET Zulu (Icing) (blue): Moderate icing. Freezing levels.



**AIRMET Selected
With Map Pointer**

```
AIRMET TANGO UPDT 3 FOR TURB VALID UNTIL
152000
AIRMET TURB...NY OH PA WV VA LE LO ...UPDT
FROM MSS TO HNK TO LYH TO HNV TO HNN TO CVG TO
FWA TO DXO TO YYZ
TO MSS
OCNL MOD TURB BLW 080 DUE TO WLY WINDS. CONDS
CONTG BYD 20Z ENDG
00-02Z.
```


AIRMET Detailed Information

SIGMET

A SIGMET (**SIG**nificant **MET**eorological Forecast) advises of weather that is potentially hazardous to all aircraft. In the contiguous United States, the following items are covered: severe icing, severe or extreme turbulence, volcanic ash, dust storms, and sandstorms that lower visibility to less than three statute miles.

A Convective SIGMET is issued for the following conditions: thunderstorms, isolated severe thunderstorms, embedded thunderstorms, hail at the surface, and tornadoes.

A SIGMET is widespread and must affect or be forecast to affect an area of at least 3,000 square miles. SIGMETs are displayed as a yellow-dashed line. To view SIGMET data, select the SIGMET using the map pointer.

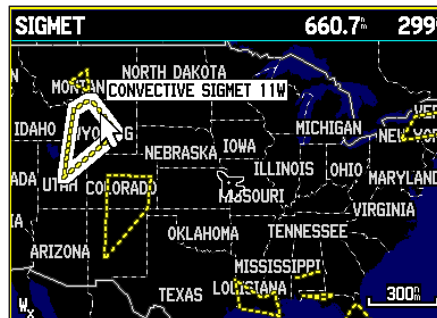

SIGMET Selected With Map Pointer

CONVECTIVE SIGMET 11W
 VALID UNTIL 2255Z
 CO WY UT
 FROM 50S BIL-40SE DDY-60E DTA-50NE JAC-50S
 BIL
 DULPG AREA TS MOV FROM 24020KT. TOPS TO
 FL380.
 OUTLOOK VALID 152255-160255

SIGMET Detailed Information

TFR

A Temporary Flight Restriction (TFR) temporarily restricts all aircraft from entering the selected airspace unless a waiver has been issued. TFRs are routinely issued for occurrences such as sporting events, dignitary visits, military depots and forest fires. TFRs are represented as an area highlighted by red (active) or yellow (not yet active). To view information about the TFR, select it with the map pointer.



TFR Selected With Map Pointer

IA CVA 5/4845 graphic 1 of 4
Sports Event TFR
Surface to 16000ft MSL
Active Jun 23 1:45 PM CDT
Expires Jun 23 3:15 PM CDT

TFR Detailed Information

TAF

Terminal Aerodrome Forecasts are issued by the National Weather Service for pilots. They include 24-hour forecasts on wind, visibility, expected weather conditions, and wind shear.

```

WHEELER DOWNTOWN *
KANSAS CITY, MO

KMKC forecast issued Jun 16 6:28 AM CDT

From 7:00 AM CDT:
Wind from 080' at 5 kt
Visibility more than 6 mi
Clouds scattered at 10000 ft, overcast at 20000 ft

Changing at 11:00 AM CDT to:
Wind from 110' at 8 kt
Visibility more than 6 mi
Clouds scattered at 4000 ft, broken at 25000 ft

Changing at 6:00 PM CDT to:
Wind from 100' at 5 kt
Visibility more than 6 mi
Scattered clouds at 25000 ft

Forecast valid until Jun 17 7:00 AM CDT


From K34
25.50 038M N 39°07.390'
W 094°35.568'
  
```

Terminal Aerodrome Forecast


Winds

Winds Aloft

Aviation units display winds using wind barbs or a wind streamline depending on the zoom range of the map. Similar to marine and automotive units, the wind barbs indicate wind speed and direction. Arrows indicate the direction of the wind streamline.

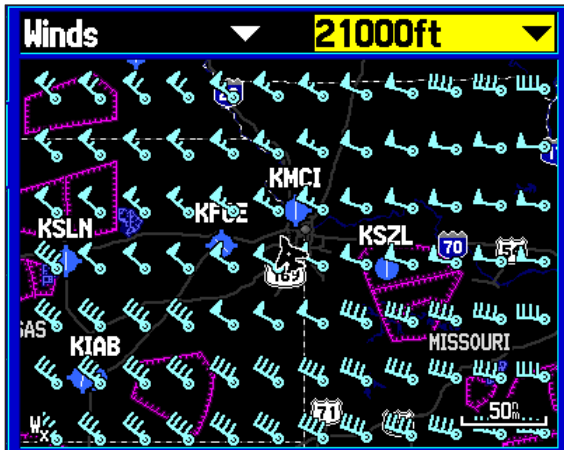



Wind Barbs

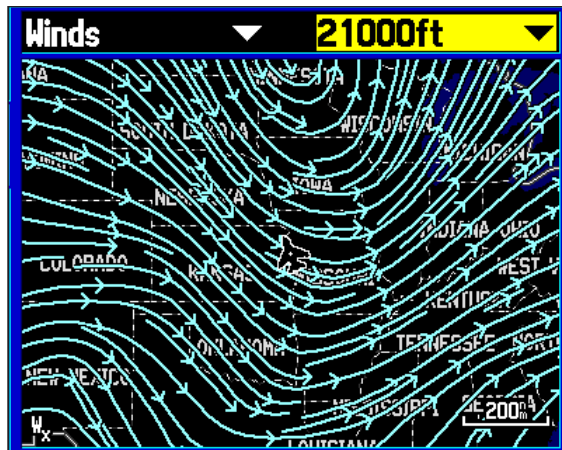

Wind Streamline

Surface Winds


Marine and automotive units show surface winds. The barb attached to the circle points in the direction of the wind. Wind speed is indicated by different flags attached to the barb.

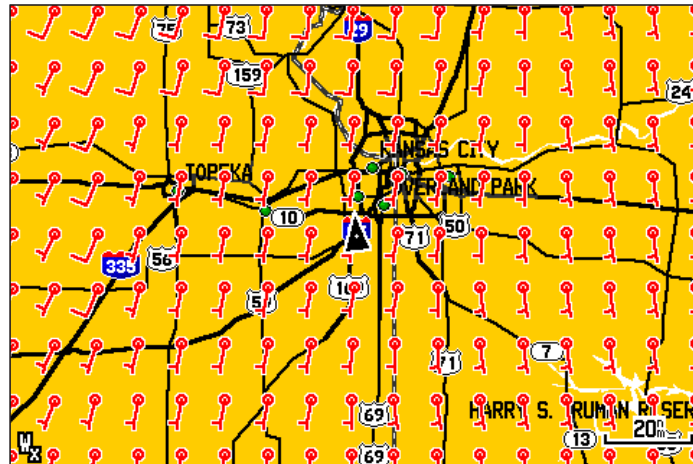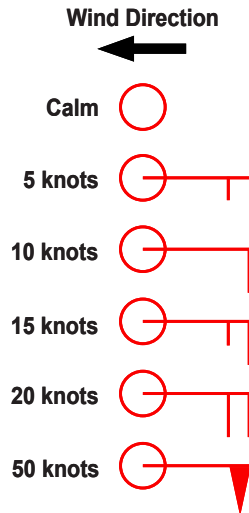


Surface Winds

NEXRAD Radar

NEXRAD or NEXt Generation Weather RADar displays precipitation, from very light rain and snow to strong thunderstorms, in varying shades and colors. The time stamp in the lower-left corner of the screen displays the elapsed time since the National Weather Service provided the information being displayed. NEXRAD can be displayed independently or with a variety of other weather information. For information on NEXRAD abnormalities, limitations, and intensity, see [pages 34–35](#).

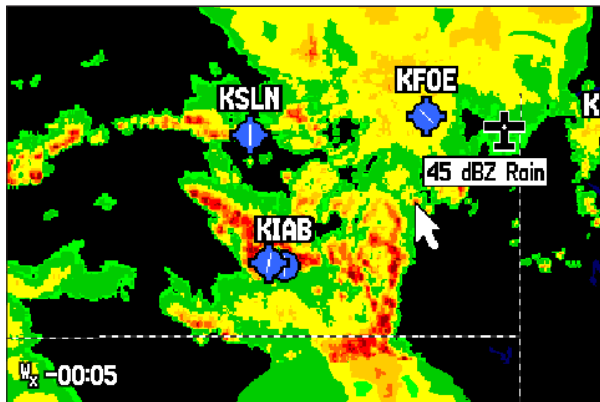


NEXRAD

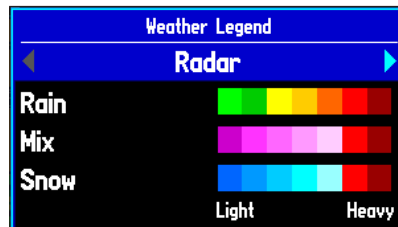


NEXRAD Legend

Satellite Mosaic

The Satellite Mosaic feature displays infrared composite images of cloud cover taken by geostationary weather satellites, providing up to seven levels of cloud cover.



Cloud Tops Legend

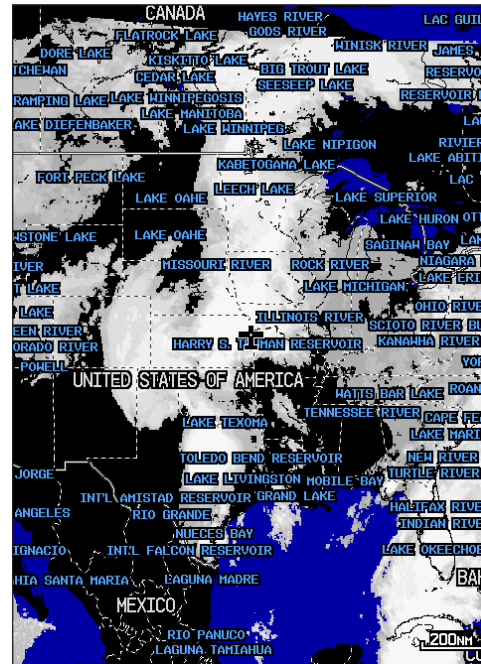


Satellite Mosaic




Echo Tops


Echo Tops are derived from NEXRAD radar and indicate the highest altitude at which precipitation is falling. Echo Tops at or above the altitude you select are displayed in 5,000 foot increments up to 70,000 feet. Echo Tops can be helpful in determining the severity of thunderstorms, where higher altitudes equate to more intense thunderstorms.

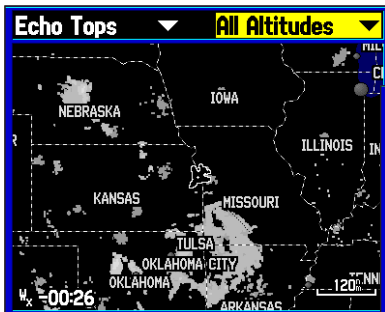

Echo Tops for All Altitudes

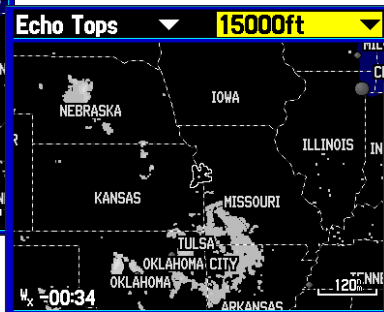


Echo Tops at 15,000 Ft.

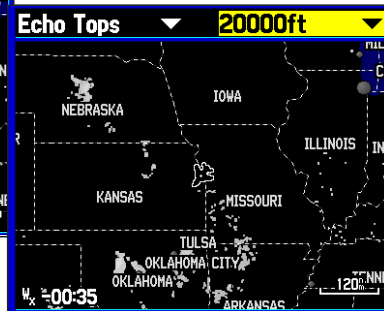


Echo Tops at 20,000 Ft.

Surface Pressure

This feature displays pressure isobars and pressure centers. The isobars connect points of equal pressure. Pressure readings can help determine weather and wind conditions in an area. High-pressure areas generally are associated with fair weather. Low-pressure areas generally are associated with clouds and the chance of precipitation. Isobars that are packed closely together show a strong pressure gradient. Strong pressure gradients are associated with areas of stronger winds. Pressure units can be displayed in millibars (mbar), inches of mercury (inHg), and hectopascals (hPa).

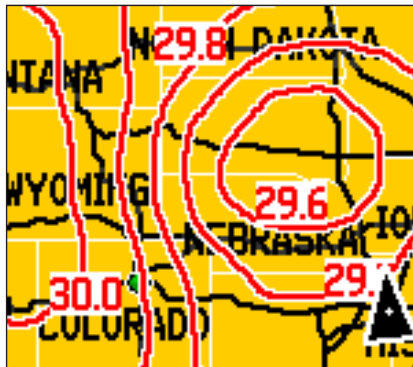

Strong Pressure Gradient

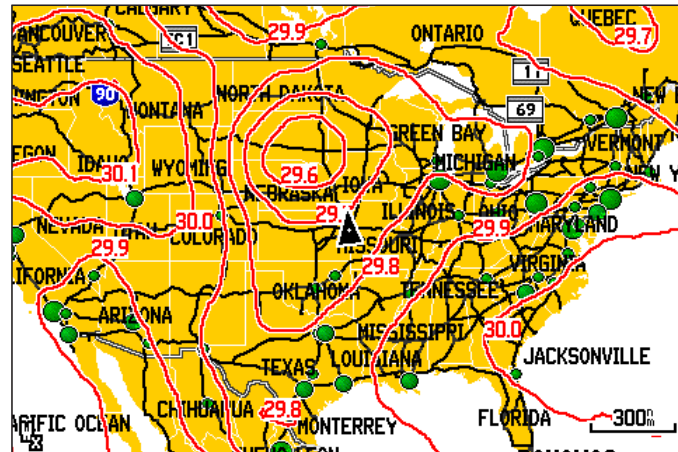


Pressure Isobars

Lightning

Lightning bolt icons represent lightning strikes, as shown in the image below. Lightning strikes appear on the map if strikes have been detected within the last seven minutes. The ground-based lightning detection network only detects cloud-to-ground lightning.



Lightning bolts indicate a cloud-to-ground lightning strike.

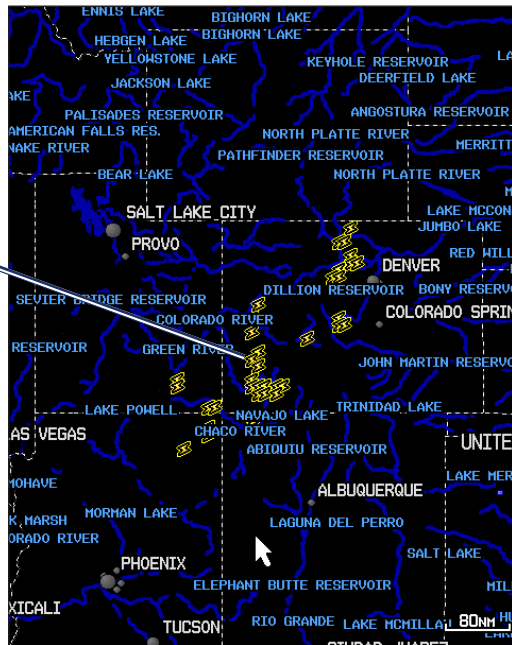


Lightning Strikes

Storm Cells


The Storm Cells feature displays storms and the projected path of storms in the immediate future.

Marine and automotive units also show the size of the storm cell. The direction in which the red cone is pointing (from the narrow end to the wide end) indicates the projected path of the storm cell. The red bars that span the cone indicate the projected area of the storm. Each bar represents 15 minutes.

Aviation units show the direction of the storm with an arrow. The tip of the arrow indicates the projected location of the storm in 15 minutes. Select the storm cell with the map pointer to view critical information about the storm.

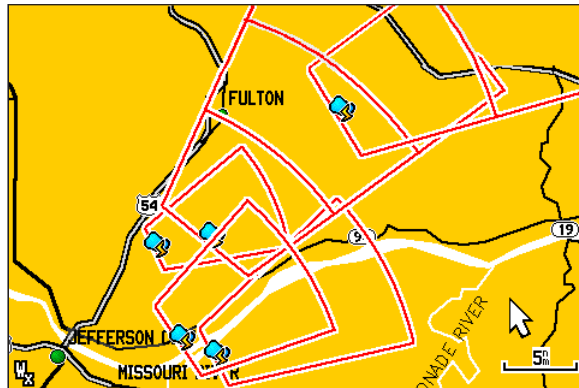


Automotive and Marine

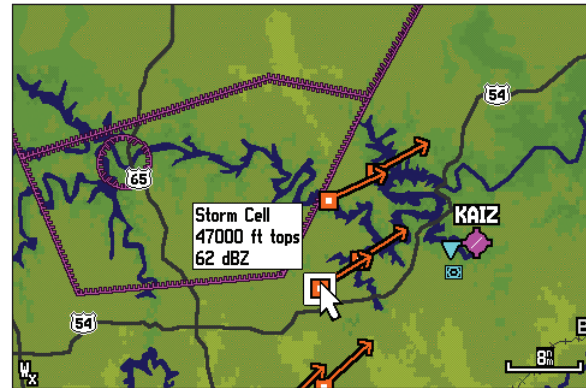

Aviation

Freezing Level

Freezing Level shows contours for the lowest forecast altitude where icing conditions are likely to occur.

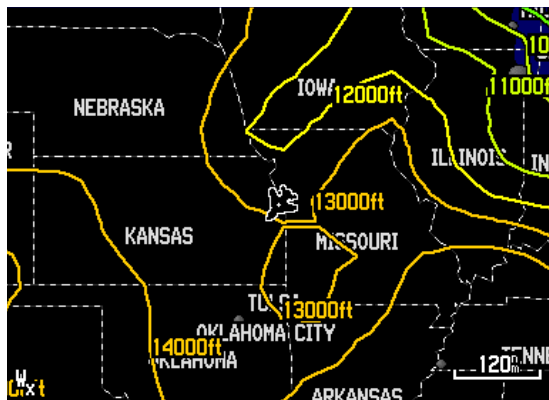


Freezing Level Contours


Forecast

Forecast displays fronts, high- and low-pressure centers, and city conditions. The forecast can be viewed in 12-hour increments for the next 48 hours.

Forecast Map

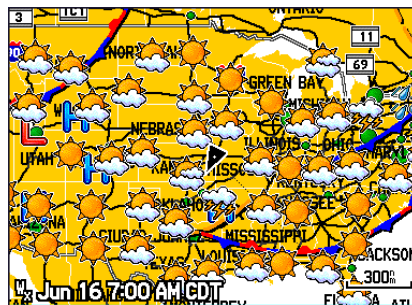

Forecast Legend

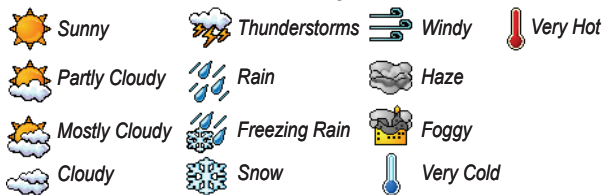


Fronts

The Fronts feature displays the lines indicating the leading edge of an air mass that is replacing an existing air mass. This feature also displays pressure centers. Pressure centers are represented by a large red “L” for low-pressure centers or a large blue “H” for high-pressure centers. Pressure centers represent an area where pressure is measured to be either the highest or the lowest relative to the surrounding area.


L Indicates a low-pressure center. A low-pressure center is an area where the measured pressure is lowest relative to the surrounding area. Moving away from a low-pressure center in any horizontal direction results in increased pressure. Winds flow counterclockwise around low-pressure centers in North America.

H Indicates a high-pressure center. Similar to a low-pressure center, a high-pressure center is an area where the measured pressure is highest relative to the surrounding area. Moving away from a high-pressure center in any horizontal direction results in decreased pressure. Winds flow clockwise around high-pressure centers in North America.



Hurricanes



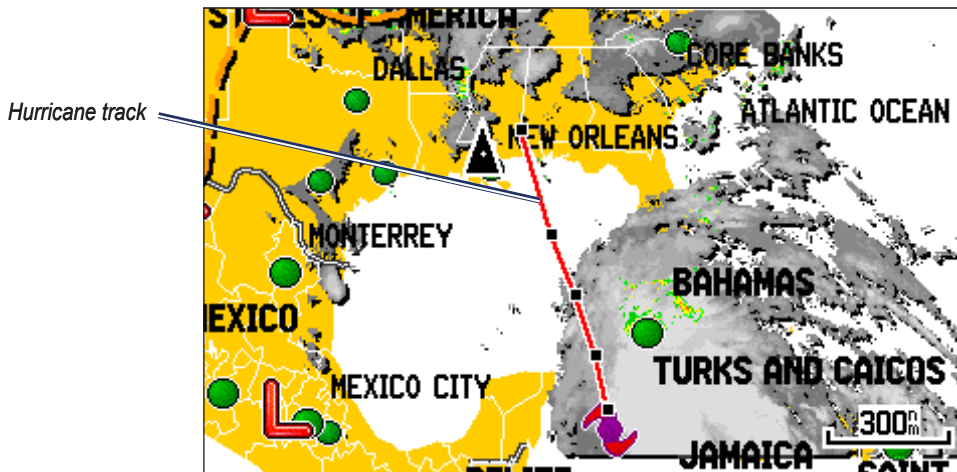

The Hurricanes feature shows the current position of a hurricane, a tropical storm, or a tropical depression, as well as its projected path (indicated by a red line). The darkened squares that appear along the red line indicate the projected locations received from the National Hurricane Center. The Center provides four forecasts at 12-hour intervals and a fifth forecast at a 24-hour interval. Each forecast indicates the projected location of the hurricane at different points along its projected path. Forecasted hurricane conditions at each projected location are also provided.




Hurricanes

County Warnings

When the National Weather Service issues a weather warning for a county, the county is highlighted with the color corresponding to the warning. To view information about the warning, select the county with the map pointer.


-  Tornado warning
-  Severe thunderstorm warning
-  Flood warning
-  Flash flood warning

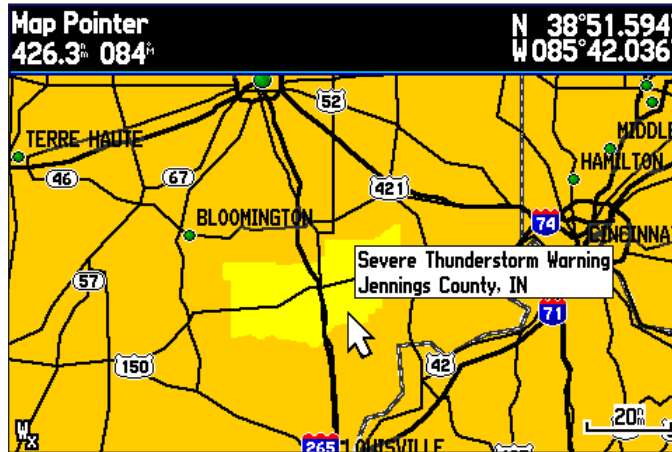

Severe Thunderstorm Warning


XM Radio

The XM Audio feature requires a subscription to XM Radio. (See [page 7](#) for more information about subscribing to XM services.) You can scan channels by category and save them to a favorites list. You can turn the XM audio output on and off.

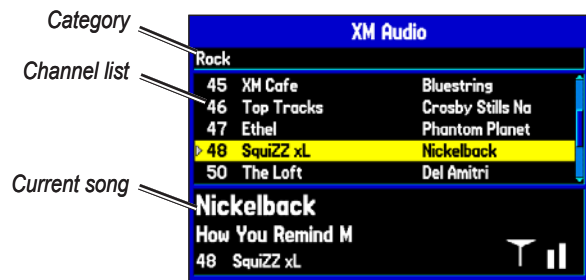


Visibility

Visibility is the forecasted maximum horizontal distance that can be seen at the surface. Contour lines on the Visibility display show the forecasted change in surface visibility. In the example below, visibility ranges from 1 mile to 4.5 miles.

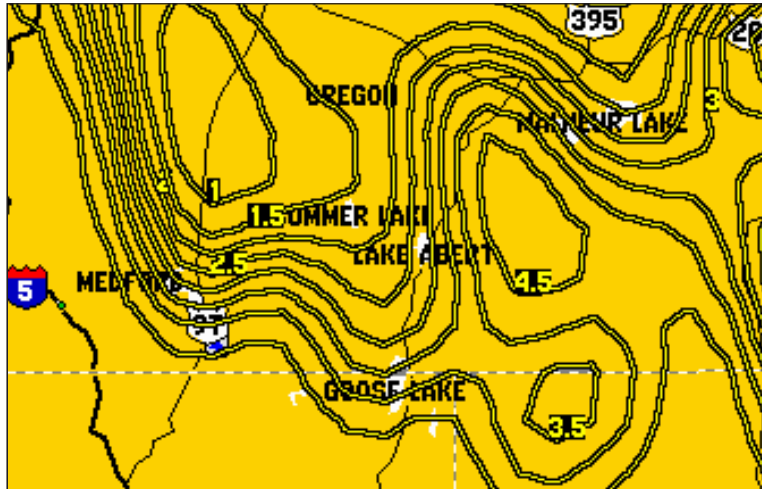


Visibility Contour Lines

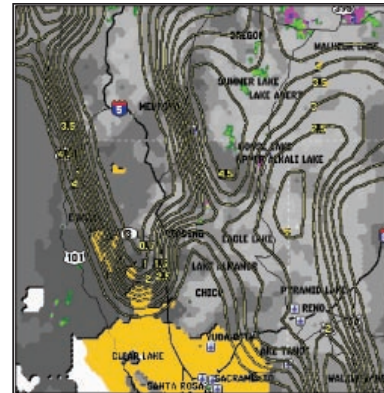

This image displays NEXRAD Radar, Satellite Mosaic, and Visibility. Displaying multiple features may help to provide a clearer picture of the weather conditions in the area.

Water Temperature

The Water Temperature feature displays the surface temperature of the water. Isotherm lines indicate the temperature breaks.

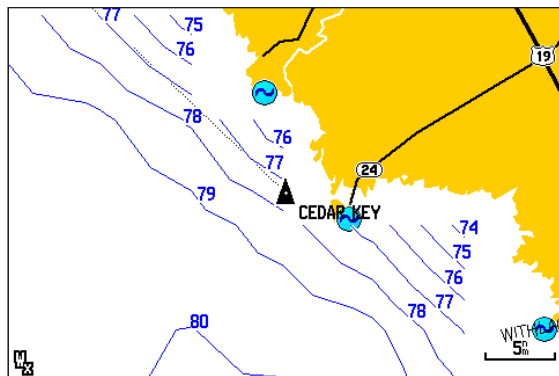

Water Temperature

Wave Period

The Wave Period feature provides the time (in seconds) between successive waves.



Wave Period

Wave Direction


The Wave Direction feature shows the direction in which waves are moving, as indicated by the direction of the red arrow.



Wave Direction

Wave Height


The Wave Height feature displays wave heights. The wave heights for an area are separated by contour lines.

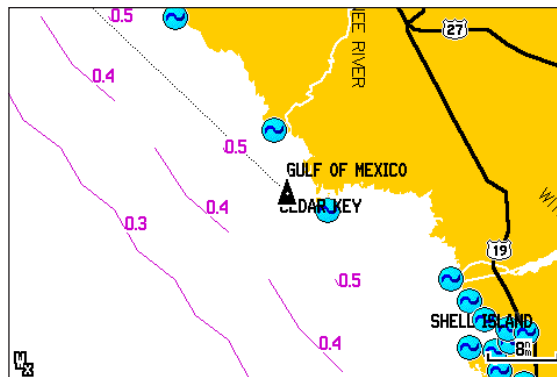

Wave Height

Marine Warnings

When a Marine Warning is issued, the area of the warning is highlighted in red. To view information about the warning, select the warning area with the map pointer.

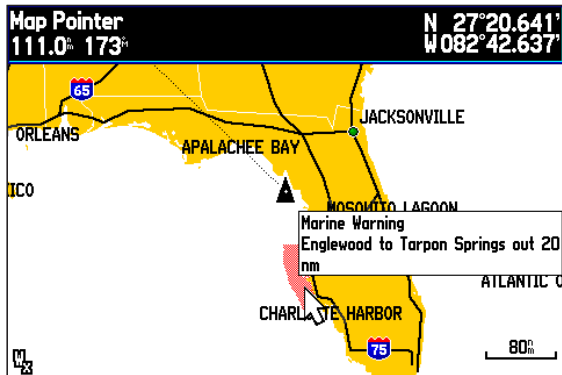

Marine Warnings

Marine Warning

256 PM EDT FRI JUN 17 2005

...SPECIAL MARINE WARNING EXPIRED AT 300 PM EDT...

FOR THE FOLLOWING AREAS...

WATERS FROM KEY WEST TO 20 NM WEST OF DRY TORTUGAS NORTH 20 NM AND SOUTH 60 NM.

WEST END OF THE 7 MILE BRIDGE TO KEY WEST OUT 20 NM

GULF SIDE OF THE LOWER KEYS OUT 20 NM

FLORIDA BAY


NO FURTHER WATERSPOUTS HAVE BEEN REPORTED ALONG THE CLOUD LINE LOCATED FROM NEAR THE MARQUESAS KEYS...TO OVER AND JUST GULF SIDE OF THE LOWER KEYS...AND CONTINUING INTO THE FLORIDA BAY, THEREFORE THE SPECIAL MARINE WARNING HAS EXPIRED AT 300 PM. HOWEVER...SATELLITE AND DOPPLER RADAR IMAGERY INDICATE CONDITIONS ARE STILL FAVORABLE FOR WATERSPOUT FORMATION ALONG PORTIONS OF THIS CLOUD LINE.

Scroll Up
Scroll Down
OK


Marine Warning Detailed Information

Buoy Reports

Report readings are taken from buoys and coastal observation stations. These readings are used to determine air temperature, dew point, water temperature, tide, wave height and period, wind direction and speed, visibility, and barometric pressure.

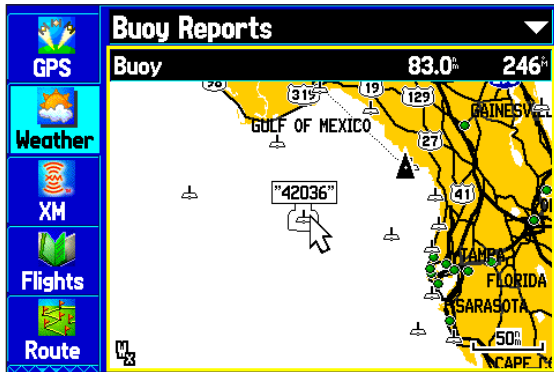

Buoy Selected With Map Pointer

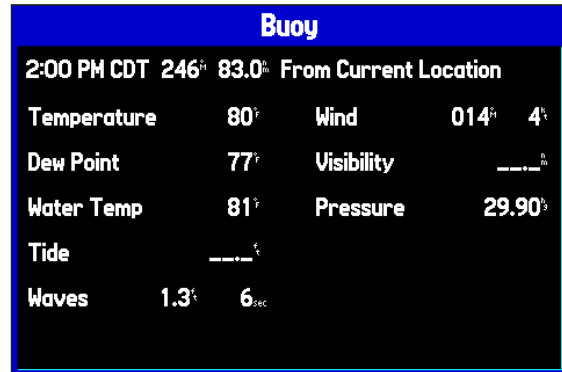

Buoy Report Detail

Appendix

GXM 40 Specifications

Physical Specifications

Size (W × H): 3.189 × 0.768 in. (81 × 19.5 mm)

Weight: 4.2 oz. (120 g)

Temperature Range: from -40°F to 185°F (from -40°C to 85°C)

Case: Fully-sealed, high-impact plastic

Waterproof: IEC 60529 IPX7 standard; 3.28 ft. (1 m) submersion for 30 minutes

Mount Thread Size: M3 × 0.5

Cable: Braided shield, 5 conductor, 28 AWG (0.081 mm²), right-angle male mini-B connector

Power

Source: 4.5–5.5 Vdc

Usage: 1.25 W max

Performance

Dynamics: 999 knots, 6 g

Feature Broadcast Rates

Feature	Data Broadcast Frequency
NEXRAD Radar	5 min.
Satellite Mosaic	15 min.
Storm Cells	1.25 min.
Lightning	5 min.
Surface Winds	12 min.
Surface Pressure	12 min.
Hurricane Track	12 min.
Visibility Forecast	12 min.
Fronts	12 min.
Water Temperature	12 min.
Wave Height	12 min.
Wave Period	12 min.
Wave Direction	12 min.

Feature	Data Broadcast Frequency
Buoy Reports	12 min.
City Forecast	12 min.
County Warnings	5 min.
Marine Warnings	20 min.
METAR	12 min.
AIRMET	12 min.
SIGMET	12 min.
Echo Tops	7.5 min.
Winds Aloft	12 min.
TFR	12 min.
TAF	12 min.
Freezing Level	12 min.

NEXRAD Overview

NEXRAD Description

NEXRAD Radar is a Doppler radar system that has greatly improved the detection of meteorological events such as thunderstorms, tornadoes, and hurricanes. An extensive network of NEXRAD stations provides almost complete radar coverage of the continental United States, Alaska, and Hawaii, and the majority of Canada. The range of each NEXRAD is 124 nautical miles.

NEXRAD Abnormalities

There are possible abnormalities regarding displayed NEXRAD images. Some, but not all, of those include the following circumstances:

- Ground clutter
- Strokes and spurious radar data
- Sun strokes, when the radar antenna points directly at the sun
- Military aircraft deployment of metallic dust (chaff), which can cause alterations in radar scans

- Interference from buildings or mountains, which may cause shadows

NEXRAD Limitations

Certain limitations exist regarding the NEXRAD radar displays. Some, but not all, are listed here for your awareness:

- NEXRAD base reflectivity does not provide sufficient information to determine cloud layers or precipitation characteristics (for example, determining between hail and rain).
- NEXRAD base reflectivity is sampled at the minimum antenna elevation angle. An individual NEXRAD site cannot depict high altitude storms at close ranges, and has no information about storms directly over the site.

NEXRAD Intensity

Colors are used to identify the different NEXRAD echo intensities (reflectivity) measured in dBZ (decibels of Z). Reflectivity (designated by the letter Z) is the amount of transmitted power returned to the radar receiver. The dBZ values increase as returned-signal strength increases. Precipitation intensity is displayed using colors represented by the dBZ values listed in the dBZ Values/Precipitation Table.

Display Rain	Display Snow	dBZ	Rain (inches per hour)	Snow (inches per hour)	Remarks	
					Rain	Snow
		≤ -10	0.00 in.	0.00 in.		
		-5	0.00 in.	trace		
		0	0.00 in.	trace–0.05 in.		Very Light
		5	0.00 in.	trace–0.10 in.		Light
Green	Blue	10	0.00 in.–trace	0.01 in.	Light	Light
		15	0.01 in.	0.1–0.2 in.	Light	Light
		20	0.02 in.	0.2–0.3 in.	Light	Light
Green	Blue	25	0.05 in.	0.3–0.5 in.	Light	Light–Moderate
		30	0.09 in.	0.5–0.7 in.	Light–Moderate	Moderate
Yellow	Cyan	35	0.24 in.	0.7–1.0 in.	Moderate	Heavy
Yellow	Cyan	40	0.48 in.	1 in.+ or sleet	Heavy	Heavy
		45	1.25 in.	1 in.+ or sleet	Heavy	Heavy
Orange	Light Blue	50	2.5 in.	sleet	Intense	
Red	Red	55	5.7 in.	sleet	Extreme	
Dark Red	Dark Red	55+	12.7 in.		Extreme	

dBZ Values/Precipitation Table

FCC Compliance

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and may cause harmful interference to radio communications if not installed and used in accordance with the instructions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet that is on a different circuit from the GPS unit.
- Consult the dealer or an experienced radio/TV technician for help.

This product does not contain any user-serviceable parts. Repairs should only be made by an authorized Garmin service center. Unauthorized repairs or modifications could result in permanent damage to the equipment, and void your warranty and your authority to operate this device under Part 15 regulations.

Limited Warranty

This Garmin product is warranted to be free from defects in materials or workmanship for one year from the date of purchase. Within this period, Garmin will, at its sole option, repair or replace any components that fail in normal use. Such repairs or replacement will be made at no charge to the

customer for parts or labor, provided that the customer shall be responsible for any transportation cost. This warranty does not cover failures due to abuse, misuse, accident, or unauthorized alteration or repairs.

This product is intended to be used only as a travel aid and must not be used for any purpose requiring precise measurement of direction, distance, location, or topography. Garmin makes no warranty as to the accuracy or completeness of map data in this product.

THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ANY LIABILITY ARISING UNDER ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, STATUTORY OR OTHERWISE. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, WHICH MAY VARY FROM STATE TO STATE.

IN NO EVENT SHALL GARMIN BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT,

GXM 40 Owner's Manual

OR CONSEQUENTIAL DAMAGES, WHETHER RESULTING FROM THE USE, MISUSE, OR INABILITY TO USE THIS PRODUCT OR FROM DEFECTS IN THE PRODUCT. SOME STATES DO NOT ALLOW THE EXCLUSION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU.

Garmin retains the exclusive right to repair or replace the unit or software or offer a full refund of the purchase price at its sole discretion. SUCH REMEDY SHALL BE YOUR SOLE AND EXCLUSIVE REMEDY FOR ANY BREACH OF WARRANTY.

To obtain warranty service, contact your local Garmin authorized dealer or call Garmin Product Support for shipping instructions and an RMA tracking number. Securely pack the unit and a copy of the original sales receipt, which is required as the proof of purchase for warranty repairs. Write the tracking number clearly on the outside of the package. Send the unit, freight charges prepaid, to any Garmin warranty service station.

Online Auction Purchases: Products sold through online auctions are not eligible for rebates or other special offers from Garmin. Online auction confirmations are not accepted for warranty verification. To obtain warranty service, an original or copy of the sales receipt from the original retailer is required. Garmin will not replace missing components from any package purchased through an online auction.

International Purchases: A separate warranty is provided by international distributors for units purchased outside the United States. This warranty is provided by the local in-country distributor and this distributor provides local service for your unit. Distributor warranties are only valid in the area of intended distribution. Units purchased in the United States or Canada must be returned to the Garmin service center in the United Kingdom, the United States, Canada, or Taiwan for service.

Garmin International, Inc.
1200 East 151st Street,
Olathe, Kansas 66062, USA
Tel. (913) 397-8200 or (800) 800-1020
Fax (913) 397-8282

Garmin (Europe) Ltd.
Liberty House,
Hounslow Business Park,
Southampton, Hampshire, SO40 9RB UK
Tel. +44 (0) 870.8501241 (outside the UK)
0808.2380000 (within the UK)
Fax +44 (0) 870.8501251

Garmin Corporation
No. 68, Jangshu 2nd Road,
Shijr, Taipei County, Taiwan
Tel. 886/2.2642.9199
Fax 886/2.2642.9099

Software License Agreement

BY USING THE GXM 40, YOU AGREE TO BE BOUND BY THE TERMS AND CONDITIONS OF THE FOLLOWING SOFTWARE LICENSE AGREEMENT. PLEASE READ THIS AGREEMENT CAREFULLY.

Garmin grants you a limited license to use the software embedded in this device (the “Software”) in binary executable form in the normal operation of the product. Title, ownership rights, and intellectual property rights in and to the Software remain in Garmin.

You acknowledge that the Software is the property of Garmin and is protected under the United States of America copyright laws and international copyright treaties. You further acknowledge that the structure, organization, and code of the Software are valuable trade secrets of Garmin and that the Software in source code form remains a valuable trade secret of Garmin. You agree not to decompile, disassemble, modify, reverse assemble, reverse engineer, or reduce to human readable form the Software or any part thereof or create any derivative works based on the

Software. You agree not to export or re-export the Software to any country in violation of the export control laws of the United States of America.

XM Satellite Radio Service Agreement

XM Satellite Radio Inc.

Hardware and required monthly subscription sold separately. Subscription fee is consumer only. Other fees and taxes, including a one-time activation fee may apply. All programming fees and weather data subject to change. XM WX weather data displays and individual product availability vary by hardware equipment. Reception of the XM signal may vary depending on location. Subscriptions subject to Customer Agreement included with the XM Welcome Kit and available at www.xmradio.com. Available only in the 48 contiguous United States. XM WX is a trademark of XM Satellite Radio Inc.

Weather Data Warranty

THE SOFTWARE PRODUCT IS PROVIDED “AS IS.” ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR OF NON-INFRINGEMENT ARE HEREBY EXCLUDED.

User Safety

If you use XM Services it is your responsibility to exercise prudent discretion and observe all safety measures required by law and your own common sense. You assume the entire risk related to your use of the Services. XM and Garmin assume no responsibility for accidents resulting from or associated with use of the Services. Your Radio Service includes traffic and weather information, and you acknowledge that such information is not for “safety for life”, but is merely supplemental and advisory in nature, and therefore cannot be relied upon as safety-critical in connection with any aircraft, sea craft or automobile usage. This information is provided “as is” and XM and Garmin

disclaim any and all warranties, express and implied, with respect thereto or the transmission or reception thereof. XM and Garmin further do not warrant the accuracy, reliability, completeness or timeliness of the traffic and weather information disclosed on the Radio Service. In no event will XM and Garmin, their data suppliers, service providers, marketing/distribution, software or Internet partners or hardware manufacturers be liable to you or to any third party for any direct, indirect, incidental, consequential, special, exemplary or punitive damages or lost profits resulting from use of or interruptions in the transmission or reception of the Services.

Limits On Our Responsibility

a) DISCLAIMERS.

EXCEPT AS EXPRESSLY PROVIDED HEREIN, WE MAKE NO WARRANTY OR REPRESENTATION, EITHER EXPRESS OR IMPLIED, REGARDING THE RADIO SERVICE. YOUR USE OF THE SERVICE IS AT YOUR SOLE RISK. THE CONTENT AND FUNCTIONALITY OF THE SERVICE IS PROVIDED

“AS IS” WITHOUT ANY WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. ALL SUCH WARRANTIES OR REPRESENTATIONS (INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND NON-INFRINGEMENT) ARE HEREBY DISCLAIMED.

b) LIMITATIONS OF LIABILITY.

WE ARE NOT RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OR LOSSES RELATING TO THE USE OF THE RADIO SERVICE, WHETHER BASED ON NEGLIGENCE OR OTHERWISE. OUR TOTAL LIABILITY TO YOU AND ANY OTHER PERSONS RECEIVING OUR SERVICES, REGARDLESS OF THE CAUSE, WILL IN NO EVENT EXCEED THE AMOUNTS THAT YOU HAVE PAID TO US FOR THE SERVICE THAT YOU RECEIVED DURING THE SIX (6) MONTH PERIOD IMMEDIATELY PRIOR TO THE SPECIFIC EVENT THAT GAVE RISE TO THE APPLICABLE DAMAGE OR LOSS. THIS

ALLOCATION OF RISK IS REFLECTED IN OUR PRICES. YOU MAY HAVE GREATER RIGHTS THAN DESCRIBED ABOVE UNDER YOUR STATE’S LAWS.

a. Under 10 U.S.C. 456, no civil action may be brought against the United States on the basis of the content of a navigational aid prepared or disseminated by either the former Defense Mapping Agency (DMA), National Imagery and Mapping Agency (NIMA), or the National Geospatial-Intelligence Agency (NGA).

b. The DAFIF™ product is provided “as is,” and no warranty, express or implied, including, but not limited to the implied warranties of merchantability and fitness for particular purpose or arising by statute or otherwise in law or from a course of dealing or usage in trade, is made by NGA as to the accuracy and functioning of the product.

c. Neither NGA nor its personnel will be liable for any claims, losses, or damages arising from or connected with the use of this product. The user agrees to hold harmless the United States National Geospatial-Intelligence Agency. The user’s sole and exclusive remedy is to stop using the

DAFIF product. This product was developed using DAFIF, a product of the National Geospatial-Intelligence Agency.

TFR Data

Temporary Flight Restriction (TFR) data is provided by the FAA and may not be updated outside of normal business hours. Confirm data currency through alternate sources and contact your local FSS for interpretation of TFR data. This product has not been endorsed or otherwise approved by the National Geospatial-Intelligence Agency, or the United States Department of Defense (10 U.S.C. 425).

Index

A

AIRMET 10

C

cleaning the unit 5
cloud cover 17
coastal observation stations 31
cold front 23
connecting the GXM 40 6

D

displaying weather information 8

F

favorites list 26
FCC Compliance 36
flash flood warning 25
flood warning 25
forecast 22
freezing Level 22
fronts 23

G

ground clutter 34

H

high-pressure center 22, 23

GXM 40 Owner's Manual

hurricanes 24

I

icing 22
IFR 9
interference 34
introduction 1
isobars 19

L

limited warranty 36
low-pressure center 22, 23

M

METAR 9
mounting holes 5

N

National Weather Service 25
NEXRAD
 abnormalities 34
 colors 35
 intensity 35
 legend 16
 limitations 34

O

occluded front 23

P

physical specifications 32
pressure gradient 19
pressure isobars 19

S

saving the service package 7
serial number 2
set up the XM account 7
severe thunderstorm warning 25
SIGMET 11
software license agreement 39
specifications 32
stationary front 23
storage 5
strobes 34
strong pressure gradient 19
sun strobes 34

T

TAF 13
temporary flight restriction 12
terminal aerodrome forecast 13
tropical depression 24
tropical storm 24
trough 23

U

unit care 5

USB

connector 5
port 6

V

VFR 9
visibility 27

W

warm front 23
warranty 36
waves
 height 29
 period 28
weather data 8
winds
 aloft 14
 speed 15
 streamline 14
 surface 15

X

XM
 audio 26
 radio 7
 WX Weather 7

**For the latest free software updates (excluding map data) throughout the life of your
Garmin products, visit the Garmin Web site at www.garmin.com.**



© 2008 Garmin Ltd. or its subsidiaries

Garmin International, Inc.
1200 East 151st Street, Olathe, Kansas 66062, USA

Garmin (Europe) Ltd.
Liberty House, Hounsdown Business Park, Southampton, Hampshire, SO40 9RB UK

Garmin Corporation
No. 68, Jangshu 2nd Road, Shijr, Taipei County, Taiwan

www.garmin.com

Part Number 190-00942- 00 Rev. A

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>