## PT960SP

# GE Profile™ 30" Built-In Double Convection Wall Oven


#### **Dimensions and Installation Information**

| KW Rating    |         |  |
|--------------|---------|--|
| 240V         | 9.0     |  |
| 208V         | 6.8     |  |
| Breaker Size |         |  |
| 240V         | 40 Amps |  |
| 208V         | 40 Amps |  |

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating. Electric wall ovens are not approved for installation with a plug and receptacle. They must be hard wired in accordance with installation instructions

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.



| Cabinet  | 30"         |
|--|-------------|
| A - Overlap of oven over side of edges of cutout                 | 11/16"-3/4" |
| B - Overlap of oven at top and bottom of cutout                  | 1"          |
| Oven   |             |
| C – Overall depth*   | 23-1/2"     |
| D – Overall height with trim                                     | 53-3/8"     |
| Overall height without trim                                      | 52-7/8"     |
| E -Overall width   | 29-3/4"     |
| *Depth including door handle is approximately 26-6/26-9/10" max. | 10" min. to |

Cutout width €28-1/2" MIN.\_ 5→ 28-5/8" MAX Cutout depth 23-1/2" MIN Junction box Condui 48-1/2" 47" to bottom of iunction box Cutout height 51-13/16" MIN. 51-15/16" MAX 21" minimum Door Opening Minimum cutout location Allowance 12" from the floor. Cabinet width 30"

MOST 30" WALL CABINETS CAN BE USED WITH THIS UNIT. THE OPENING BETWEEN THE INSIDE WALLS MUST BE AT LEAST 28-1/2" WIDE

For answers to your Monogram,® GE Profile™ or GE® appliance questions, visit our website at ge.com or call GE Answer Center® service, 800.626.2000.








### PT960SP

#### GE Profile™ 30" Built-In Double Convection Wall Oven

#### **Features and Benefits**

- Glass Touch LCD Controls Combine a smooth, easy-to-clean glass design with large, easy-to-read graphics to facilitate easier usage
- PreciseAir<sup>™</sup> Convection System A reversing fan circulates heat and air for evenly browned and baked foods
- Self-clean Roller Rack This self-clean rack glides on stainless steel ball bearings to simplify loading and unloading
- Convection Bake This setting is optimal for baking casseroles or lasagnas, yeast breads, pies and pizzas with no need to turn the pan
- Convection Roast Optimal for larger cuts of meat, this setting rotates the heat around all sides, sealing in the juices, producing rotisserie results at up to 25% faster than a conventional oven
- Flat back Convection Convection fan system is only 1" deep to provide additional room for cookware
- Hidden Bake Oven Interior Conceals the lower oven bake element to eliminate hard-to-reach areas that collect food and spills for easy cleaning
- Self-clean Oven Self-clean allows you to spare yourself from the trouble and effort it takes to scrub the oven interior. The oven does all the work!
- Dual Interior Lighting Bright interior lights help you check on the progress of your cooking
- Self-clean Heavy-duty Oven Racks Tough, double-coated racks can stay in the oven during the self-clean cycle to eliminate hand cleaning
- Model PT960SPSS Stainless steel

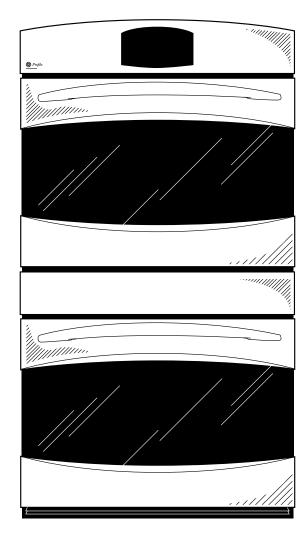



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com