



ZTD910BF/SF/WF – GE Monogram 30" Warming Drawer


Single Oven Installation (in inches)



Warming Drawer Dimensions (in inches)



Double Oven Installation (in inches)



Note: Additional clearance between cutouts may be required. Check to be sure that oven supports above the Warming Drawer location do not obstruct the required interior 23-1/2" depth and 9-1/4" height.



For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service. 800.626.2000.


Specification Revised 10/05

130716



ZTD910BF/SF/WF – GE Monogram 30" Warming Drawer

Undercounter Installation (in inches)

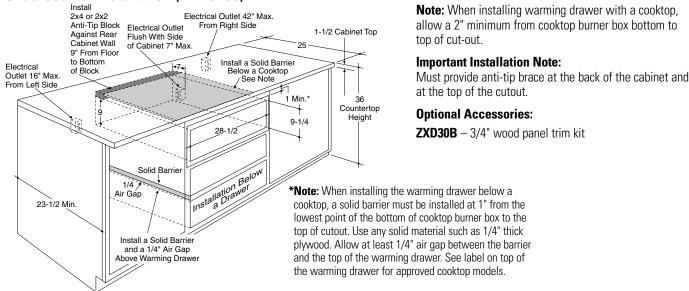

- When installed, the front face of the drawer will be nearly flush with adjacent cabinetry doors.
- Drawer overlaps will conceal cut edges on all sides of the opening.
 The rough opening for the drawer must be:
 - -Depth 23-1/2" min. from inside back to front of cabinet frame.
 - -Width 25-1/2" for 27" wide models, 28-1/2" for 30" wide models.
 - -Height 9-1/4"
- 5" min. above floor or 1" above toekick. 23-1/4" from floor to bottom of cutout is recommended for under countertop installation.

Installation below a cooktop:

Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer for approved models. A solid barrier and air gap between cooktop and warming drawer is required. See Note above.

Installation below a cabinet drawer:

The warming drawer may be installed beneath a cabinet drawer. In this installation, a solid barrier should be installed above the warming drawer to block access. Use any solid material such as 1/4" thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer. Observe the 5" min. above the floor or 1" above the toekick minimum installation height.


Note: If you are installing in frameless cabinets, it may be necessary to install 1/2" wide cleats to accept drawer mounting screws. See drawer to find exact locations of mounting screws.

Specification Revised 10/05

130716

Side to Side Installation:

Install two warming drawers in separate cutouts. Allow 2" min. between cutouts.




Side to Side Installation



For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



ZTD910BF/SF/WF – GE Monogram 30" Warming Drawer

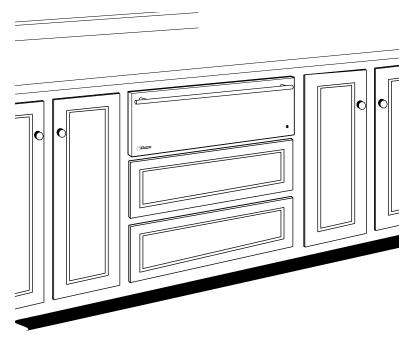

Features and Benefits

- 1.92 cu. ft. Capacity
- Variable Temperature Control Proof (80)/ Low (140)/Med (170)/High (210)
- Variable Humidity Control Crisp to Moist
- Half Rack
- "On" Signal Light
- On/Off Rocker Switch
- Removable Stainless Steel Pan
- Full Extension Ball Bearing Glides
- Hidden Controls Provide Flush Installation Appearance
- Variable Installation Options
- Pan Set Included
- Model ZTD910WFWW White on white
- Model ZTD910BFBB Black on black
- Model ZTD910SFSS Stainless steel

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com