


ZIFI240PII – GE Monogram Fresh-Food Refrigerator Module (Custom panel required) ZIFS240PSS – GE Monogram Fresh-Food Refrigerator Module (Stainless steel)

Dimensions and Specifications (in inches)

Installation Space



The cutout depth must be 24"

The cutout dimensions shown allow for a full door swing and access to the pull-out racks when installed as a built-in.


- The Fresh-Food Refrigerator can be free-standing.
- The stainless steel model ZIFS240PSS can be installed flush with standard cabinetry. ZIFI240PII with custom panel will project forward 1-3/4" of adjacent 24" deep base cabinets.
- Note: Door swing is not reversible.

Additional Specifications:


A 120 volt 60Hz., 15 or 20 amp power supply is required. An
individual property grounded branch circuit or circuit breaker is
recommended. Install a properly grounded 3-prong electrical
receptacle recessed into the back wall as shown. Electrical
must be located on rear wall as shown. Note: GFI (ground fault
interrupter) is not recommended.

Product Clearances

Models with a Custom Door Panel



Stainless Steel Models



All models are factory set for a 110° door swing.

For a minimum 90° door swing:

- Allow 4" min. clearance to wall on the hinge side for Stainless Steel models.
- Allow 4-1/2" min. clearance to wall on the hinge side for models with a custom panel and custom handle.

For a full 110° door swing:

- Allow 14" min. clearance to wall on the hinge side for Stainless Steel models
- Allow 16" min. clearance to wall on the hinge side for models with a custom panel and custom handle.



For answers to your Monogram, GE Profile or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center service, 800.626.2000.




ZIFI240PII – GE Monogram Fresh-Food Refrigerator Module (Custom panel required)) ZIFS240PSS – GE Monogram Fresh-Food Refrigerator Module (Stainless steel)

Dimensions and Specifications (in inches)

For a complete food storage center, install two Monogram refrigeration modules side-by-side.

Note: Reversible door swing on wine chillers/reserves and beverage centers only. See below for combination cutout dimensions.

Important Note: Products must operate from separate, properly grounded receptacles.

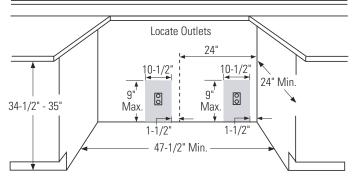

Note: Additional cutout width may be required for models with custom panels.

Grounding the Fresh-Food Refrigerator

IMPORTANT - (Please read carefully)

FOR PERSONAL SAFETY, THIS APPLIANCE MUST BE PROPERLY GROUNDED.

The power cord of this appliance is equipped with a 3-prong (grounding) plug which mates with a standard 3-prong (grounding) wall receptacle to minimize the possibility of electric shock hazard from this appliance.

Have the wall outlet and circuit checked by a qualified electrician to make sure the outlet is properly grounded.

When a standard 2-prong wall outlet is encountered, it is your personal responsibility and obligation to have it replaced with a properly grounded 3-prong wall out.

DO NOT, UNDER ANY CIRCUMSTANCES, CUT OR REMOVE THE THIRD (GROUND) PRONG FROM THE POWER CORD.

DO NOT USE AN ADAPTER PLUG TO CONNECT THE REFRIGERATOR TO A 2-PRONG OUTLET.

DO NOT USE AN EXTENSION CORD WITH THIS APPLIANCE.


Specification Revised 7/05

120032


3/4" Overlay Panel Dimensions

Model ZIFI240PII requires customer-provided overlay door panel.

- The overlay panel must be secured to a 1/4" thick backer panel which slides into the trim.
 A .10" thick spacer panel must be placed between the custom and backer panel.
- A custom handle of your choice, supplied by your cabinet maker, must be installed on the overlay panel.



Use a 3/4" router bit to cut a notch into the **back** side of the assembled panel to allow for hinge clearance.




3/4" Overlay Panel Dimensions (in inches)

	A (Width)	B (Height)
1/4" Backer	23-3/16"	29-9/16"
0.10" Spacer	22-1/2"	29-1/16"
3/4" Overlay	23-5/8"	30"

NOTE: Max. assembled drawer panel weight is 25 lbs.

Assemble overlay panels with glue and screws.

- Center spacer panel on the backer panel, left to right and top to bottom. Secure the panels with glue.
- Center the spacer/backer panel on the overlay panel. Secure with glue and screws. Countersink screws into the backer panel.






For answers to your Monogram, GE Profile™ or GE® appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.



ZIFI240PII – GE Monogram Fresh-Food Refrigerator Module (Custom panel required) **ZIFS240PSS – GE Monogram Fresh-Food Refrigerator Module** (Stainless steel)

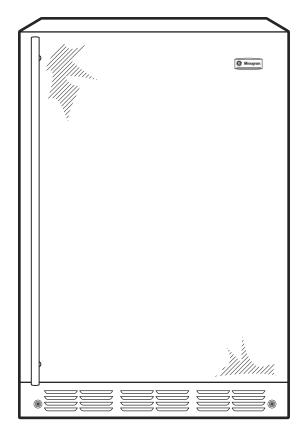



Specification Revised 7/05

Features and Benefits

- Electronic adjustable temperature control Offers a range of temperatures for precise chilling
- LED temperature display Allows you to monitor the temperature at a glance
- Clear LEXAN® crisper on full-extension slides Provides easy access to contents
- Removable spillproof glass shelves Helps contain spills for ease of cleaning
- QuickSpace[™] Shelf Quickly slides out of the way to make room for tall items
- Custom panel and handle required Customer must install a custom door panel and handle to complement their décor (ZIFI240PII only)
- Model ZIFS240PSS Stainless steel
- Model ZIFS240PLSS Stainless steel, left hinge
- Model ZIFI240PII Custom panel and handle required
- Model ZIFI240PLII Custom panel and handle required, left hinge

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com