Models B-3, B-3WL, & B-3WR

PRECISION BREW Decanter Brewers



(Decanters sold separately)

Digitally controlled decanter brewer holds brew temperature to ± 1°F throughout the brew cycle.

Brew temperature, brew volume, operator defined pre-infusion/pulse brewing, energy savings, and low temp/no brew are programmable from the front display.



GRINDMASTER


CORPORATION



Models B-3, B-3WL, & B-3WR

Features:

- Model B-3 is a single, digitally controlled brewer. It has one warmer under the brew basket and two warmers on top (Decanters sold separately).
- Model B-3WR is a single, digitally controlled brewer. It has one warmer under the brew basket and two warmers on the right side (Decanters sold separately).
- Model B-3WL is a single, digitally controlled brewer. It has one warmer under the brew basket and two warmers on the left side (Decanters sold separately).
- Precise Brew Temperature The brewer will hold the brew temperature to +/- 1°F during the complete brew cycle.
- Brew Volume Can be set by 'teach' mode to eliminate trial-and-error set-up.
- Pulse brewing/pre-infusion Allows the brew sequence to extract up to 20% more dissolved solids per batch of coffee.
 Programmable: number of pulses, pulse-on time and pulse-off time.
 Changing the pulse sequence does not affect the brew volume.
- Low Temp/No Brew Allows the brew cycle to begin only when the water has reached the optimum brew temperature.
- Cycle Counter The brewer counts the total number of brew cycles.
- Programming Lock-Out The brewer settings can be "locked" to prevent tampering.
- Energy Savings/Coffee Old The warmers can be programmed to shut off up to 240 minutes from the last brew cycle.
- Pour-Over Capability Automatically converts to pour-over mode when the inlet valve does not sense water. Also capable of being manually set to pour-over mode through the front.
- Dual Voltage with toggle switch models are available to accept 120/240V or 120V supply.
- Warranty 2 years parts and labor on the brewer. 4 years part warranty on the control board.

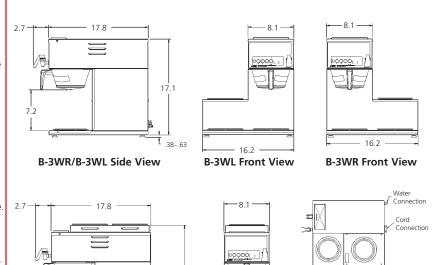

B-3 Front View

18.3

.38-.63

Specifications	Model B-3	Models B-3WR/B-3WL
Electrical	120V/1800W/15Amps 120/240V/3800W/16Amps 120/208V/2860W/13.8Amps European Voltages Available	120V/1800W/15Amps 120/240V/3800W/16Amps 120/208V/2860W/13.8Amps European Voltages Available
Brew Capacity (64 oz. decanters per hour)	(8) at 120V; (16) at 240V; (15) at 208V	(9) at 120V; (16) at 240V; (15) at 208V
Water Line	1/4" flare	1/4" flare
Water Pressure	30-80 psi	30-80 psi
Tank Drain	Yes	Yes
Tank Size	1.38 gal. (5.2 L)	1.38 gal. (5.2 L)
Dimensions (H x W x D)	19" x 8-1/4" x 17-3/4" 49 cm x 21 cm x 45 cm	17-3/4" x 16-1/4" x 17-3/4" 45 cm x 41 cm x 45 cm
Ship Dimensions (H x W x D)	22" x 13" x 24" 56 cm x 33 cm x 61 cm	22" x 21" x 24" 56 cm x 53 cm x 61 cm
Weight	27 lbs. (12.2 kg)	29-1/2 lbs. (13.4 kg)
Ship Weight	35 lbs. (15.9 kg)	40 lbs. (18.1 kg)
Listings	UL, CUL, NSF, (CE for E models only)	UL, CUL, NSF, (CE for E models only)

B-3 Side View

7.2

Specifications are subject to improvement or change without notice.







B-3WR Top View

B-3 Top View

Connection

Connection

Cord

Grindmaster® Coffee Grinders and Brewers • PrecisionBrew™ Brewing Systems • Espressimo® Espresso Machines Crathco® Hot Beverage Dispensers • Crathco® Cold and Frozen Beverage Dispensers • AMW Coffee and Tea Systems Tel (502) 425-4776 • Fax (502) 425-4664 • 1-800-695-4500 (USA & Canada only)

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com