



# EF 250 Series Flake ICE Maker

- ✓ Produces up to 400 lbs. (182 Kgs.)\* of ICE per day
- ✓ Self-contained insulated storage available in 143 lbs. (65 Kgs.) or 213 lbs. (97 Kgs.)
- ✓ Constructed from sturdy, corrosion-resistant 300 series stainless steel
- ✓ Ultra-low profile - 41 inches (1041 mm) tall
- ✓ Available with an air-cooled condenser



***ICE-O-Matic® is the Best ICE Making Solution for:  
Hard Water, Food Safety and Tight Spaces***

## ***Problem***

### **Optimal Bin Storage**

Bin not large enough?

### **Tight-Fitting Spaces**

Kitchen space utilization

### **Operating Environments**

Built to last?

### **Dirty Air Filter**

Forget to change the air filter?

## ***Solution***

### **Multiple Solutions**

Storage of 143 pounds or 213 pounds of flaked ICE

### **Maximum ICE**

Maximum ICE production in a minimum amount of space with an ultra-low profile:

- 41 inches tall
- Air intake only on one side
- Choice of 32 or 38 inches wide

### **ICE-O-Matic® Tough**

Constructed with a brass evaporator and rugged stainless steel transport system enclosed in polyurethane insulation


### **Filter-Free Air**

No air filter to change

\*Rated at 70 ° (21°) Air / 50° (10°) Water

# EF 250 Series Flake ICE Maker Self-Contained

## Dimensions and Air Flow

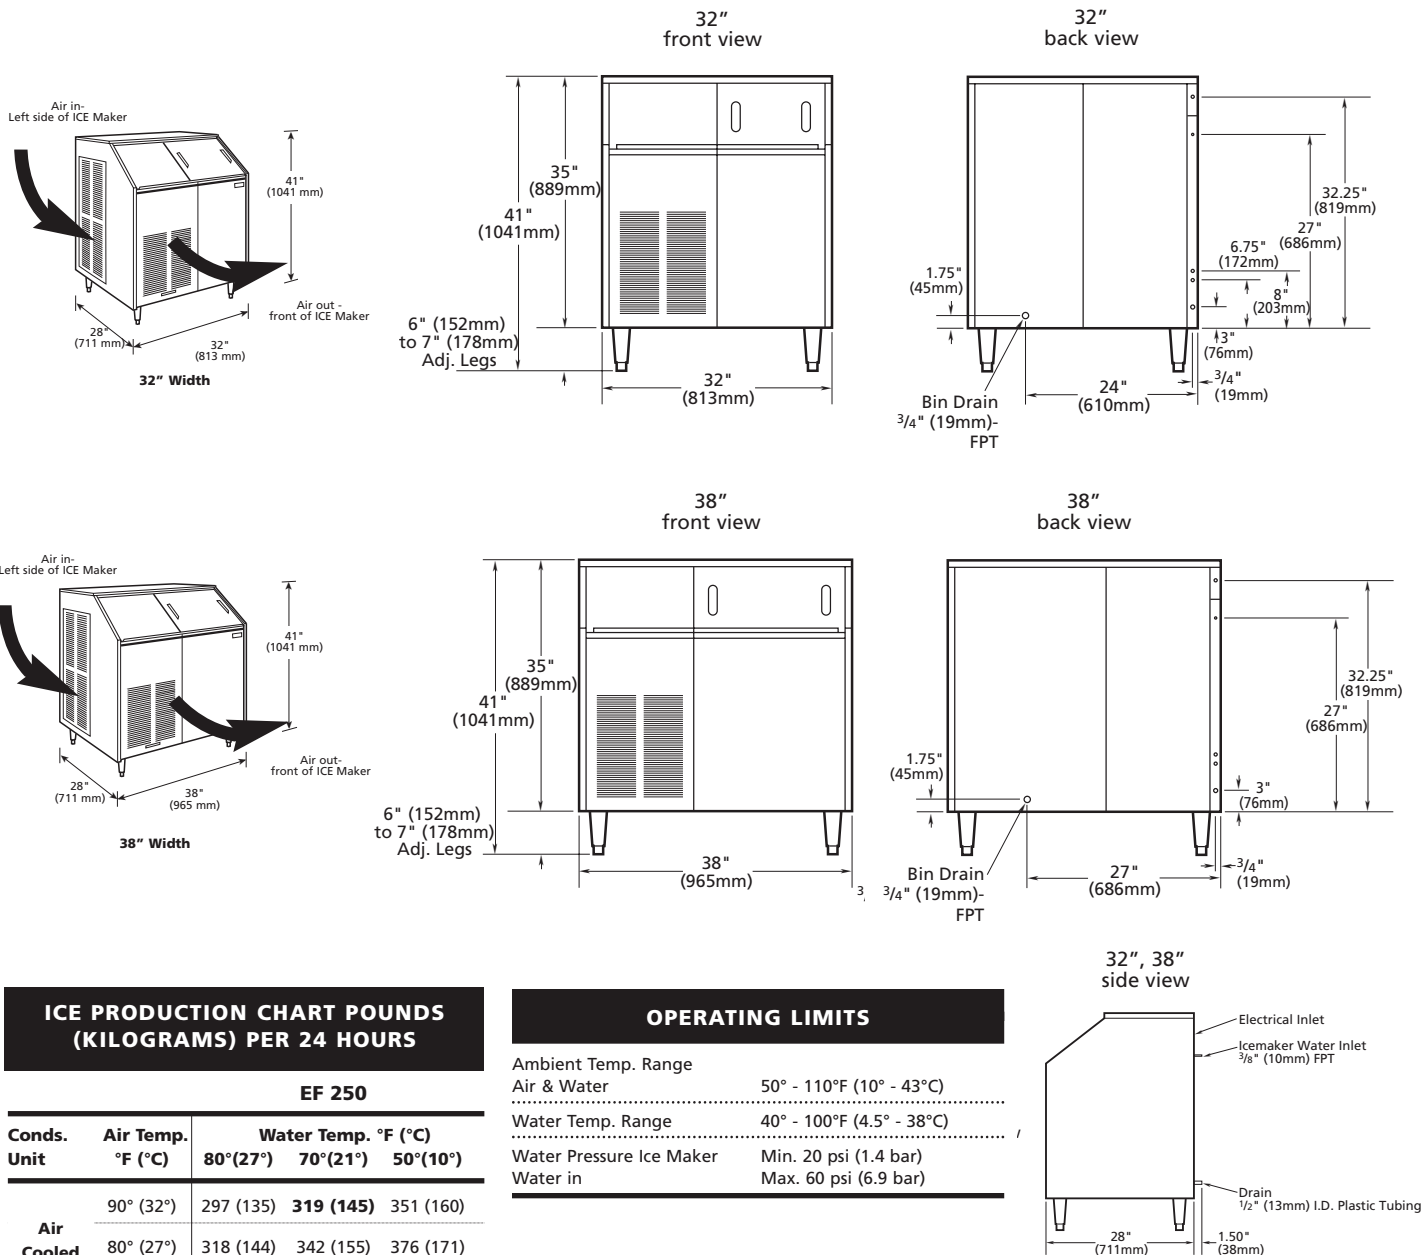

### ICE PRODUCTION CHART POUNDS (KILOGRAMS) PER 24 HOURS

#### EF 250

Conds. Unit	Air Temp. °F (°C)	Water Temp. °F (°C)		
		80°(27°)	70°(21°)	50°(10°)
Air Cooled	90° (32°)	297 (135)	<b>319 (145)</b>	351 (160)
	80° (27°)	318 (144)	342 (155)	376 (171)
	70° (21°)	338 (154)	364 (165)	<b>400 (182)</b>

All specifications and performance data are subject to normal manufacturing variances.


### OPERATING LIMITS

Ambient Temp. Range	50° - 110°F (10° - 43°C)
Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker	Min. 20 psi (1.4 bar)
Water in	Max. 60 psi (6.9 bar)

### ORDERING AND SPECIFICATION INFORMATION

Model No.	Cab Size Width" (mm)	Bin Storage Lbs. (Kgs.)	Cond. Unit	ICE Production per 24 hrs. at 70° Air/50° Water lbs. (Kgs.)	ICE Production per 24 hrs. at 90° Air/70° Water lbs. (Kgs.)	Water Used-Gals. (Lits.) per 100 lbs. of Ice 90° Air/70° Water		Kilowatts Used per 100 lbs. of Ice 90° Air 70° Water	Btuh	Voltage Characteristics	Min. No. of Wires	Max. Circuit Amp.	Shipping Fuse Size	Weight lbs. (Kgs.)
						ICE Prod. Use	Cond. Use							
EF250A32S	32 (813)	143 (65)	Air	400 (182)	319 (145)	12.0 (45)	n/a	5.6	4233	115/60/1	3	12.4	15	240 (109)
EF250A38S	38 (965)	213 (97)	Air	400 (182)	319 (145)	12.0 (45)	n/a	5.6	4233	115/60/1	3	12.4	15	250 (114)

Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



We reserve the right to make changes in design and construction at any time without obligation.  
 2003 © ICE-O-Matic Rev Code: 2000A-06/03-55

# ICE-O-Matic®

ICE-O-Matic 11100 E. 45th Avenue, Denver, CO 80239  
 Tel. 303 371-3737 Fax. 303 371-6296 www.iceomatic.com

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>