
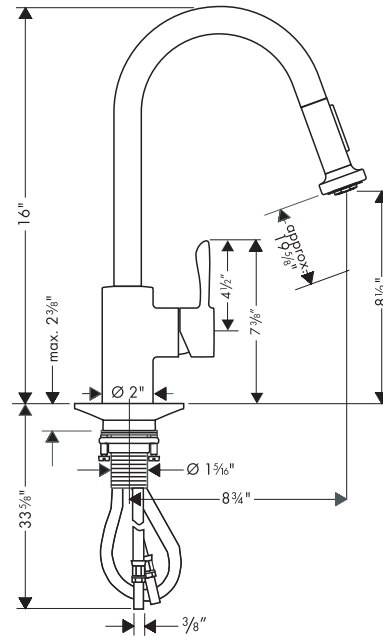


Solaris HighArc 2 Spray Pull Out 06672XX0

Available in Chrome (00), Steel Optik (86)

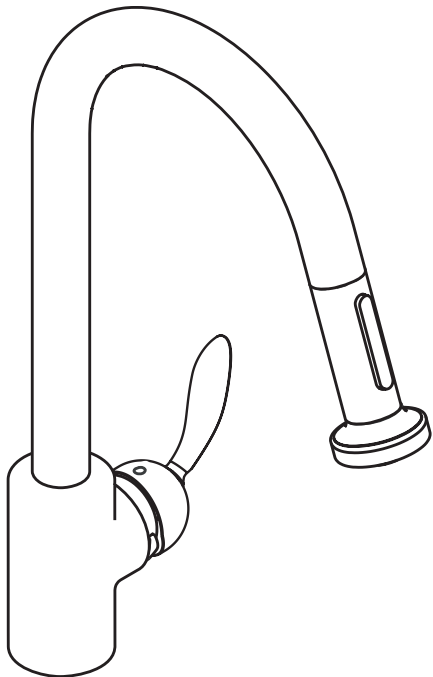

Product Specification

ADA compliant

Solid brass body

Spout swivels 360°

Ceramic cartridge operation

Flow rate 2.2 gpm

Pull-out spray

Two spray modes - stream and spray

Protection against back siphonage provided by check valve in sprayhead

Hole size in mounting surface 1 3/8"

Max. mounting surface thickness 2 3/8"

3/8" supply hoses - requires stops with 3/8" compression fittings (not included)

hansgrohe

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>